


Director Mini

User Manual, Reference and FAQs

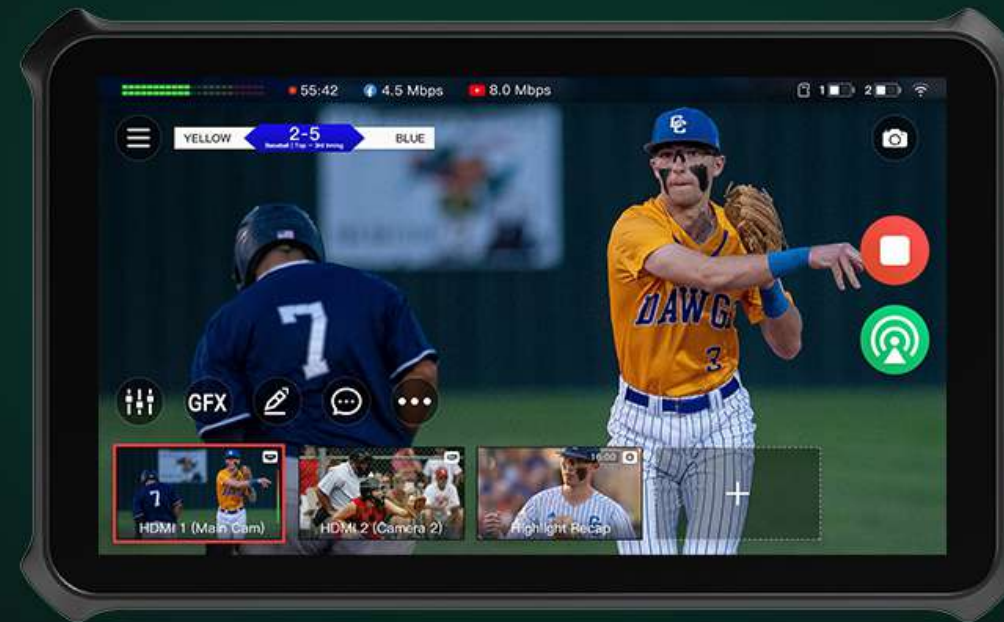

Firmware: 2.4

Date: 03.29.2024

TABLE OF CONTENTS

03 Introduction

06 What's New

10 Owners Guide

30 Produce Your Show

Create and Manage Shows	30
Create and Manage Scenes	33
Edit Scenes	39
Background Music	74

75 Present Your Show

Control Scenes	75
Control Volume	78
Use GFX	85
Use Pen	105
PTZ Control	106
Control Phone Camera	110
Control BGM	111
Replay	112

115 Start Streaming and Recording

Live Streaming	115
Record and Screenshot	131
Album	136

138 Settings

Network	138
Bluetooth	144
Display	145
Audio	146
Storage	147
Encode	148
Switch	149
Replay	153
OSC Remote Control	155
System	157

164 Battery

168 Shortcuts for Director Mini

179 FAQs

195 Support

197 Notice

198 Glossary and Abbreviations

Introduction

Director Mini – Your All-in-One Video Companion

Meet the Director Mini: your compact solution for all things video. Whether you're directing, editing, or streaming, the Director Mini has got you covered. With its intuitive interface, capturing from various video sources becomes a breeze. And the best part? You can craft and share captivating content in real time, be it live streaming or recording.

Benefits

Diverse Video Inputs: From HDMI and webcams to NDI[®] streams, [RTMP/SRT](#) streams, phone cameras, and even video clips, you can effortlessly bring multiple perspectives into your content.


Always Catch the Action: With the ability to use multiple cameras, you're guaranteed not to miss a moment. The result? A richer and more engaging viewing experience.

Enhance Your Streaming: Show off your brand, keep score, or add any overlay you like with [GFX](#) support. Real-time control ensures your content stays fresh and professional-looking.

Portability and Versatility: Its compact design, dual hot-swappable battery support, and multi-network compatibility mean you can take Director Mini to diverse events. From sports games and weddings to outdoor live broadcasts, you're set to record and stream whenever inspiration strikes.

Director Utility App: Gain remote control over the Director Mini and even use your mobile device as an additional camera. Your multi-camera setup just got more dynamic.

Embrace the freedom and flexibility of the Director Mini, and let your creativity shine anywhere, anytime.

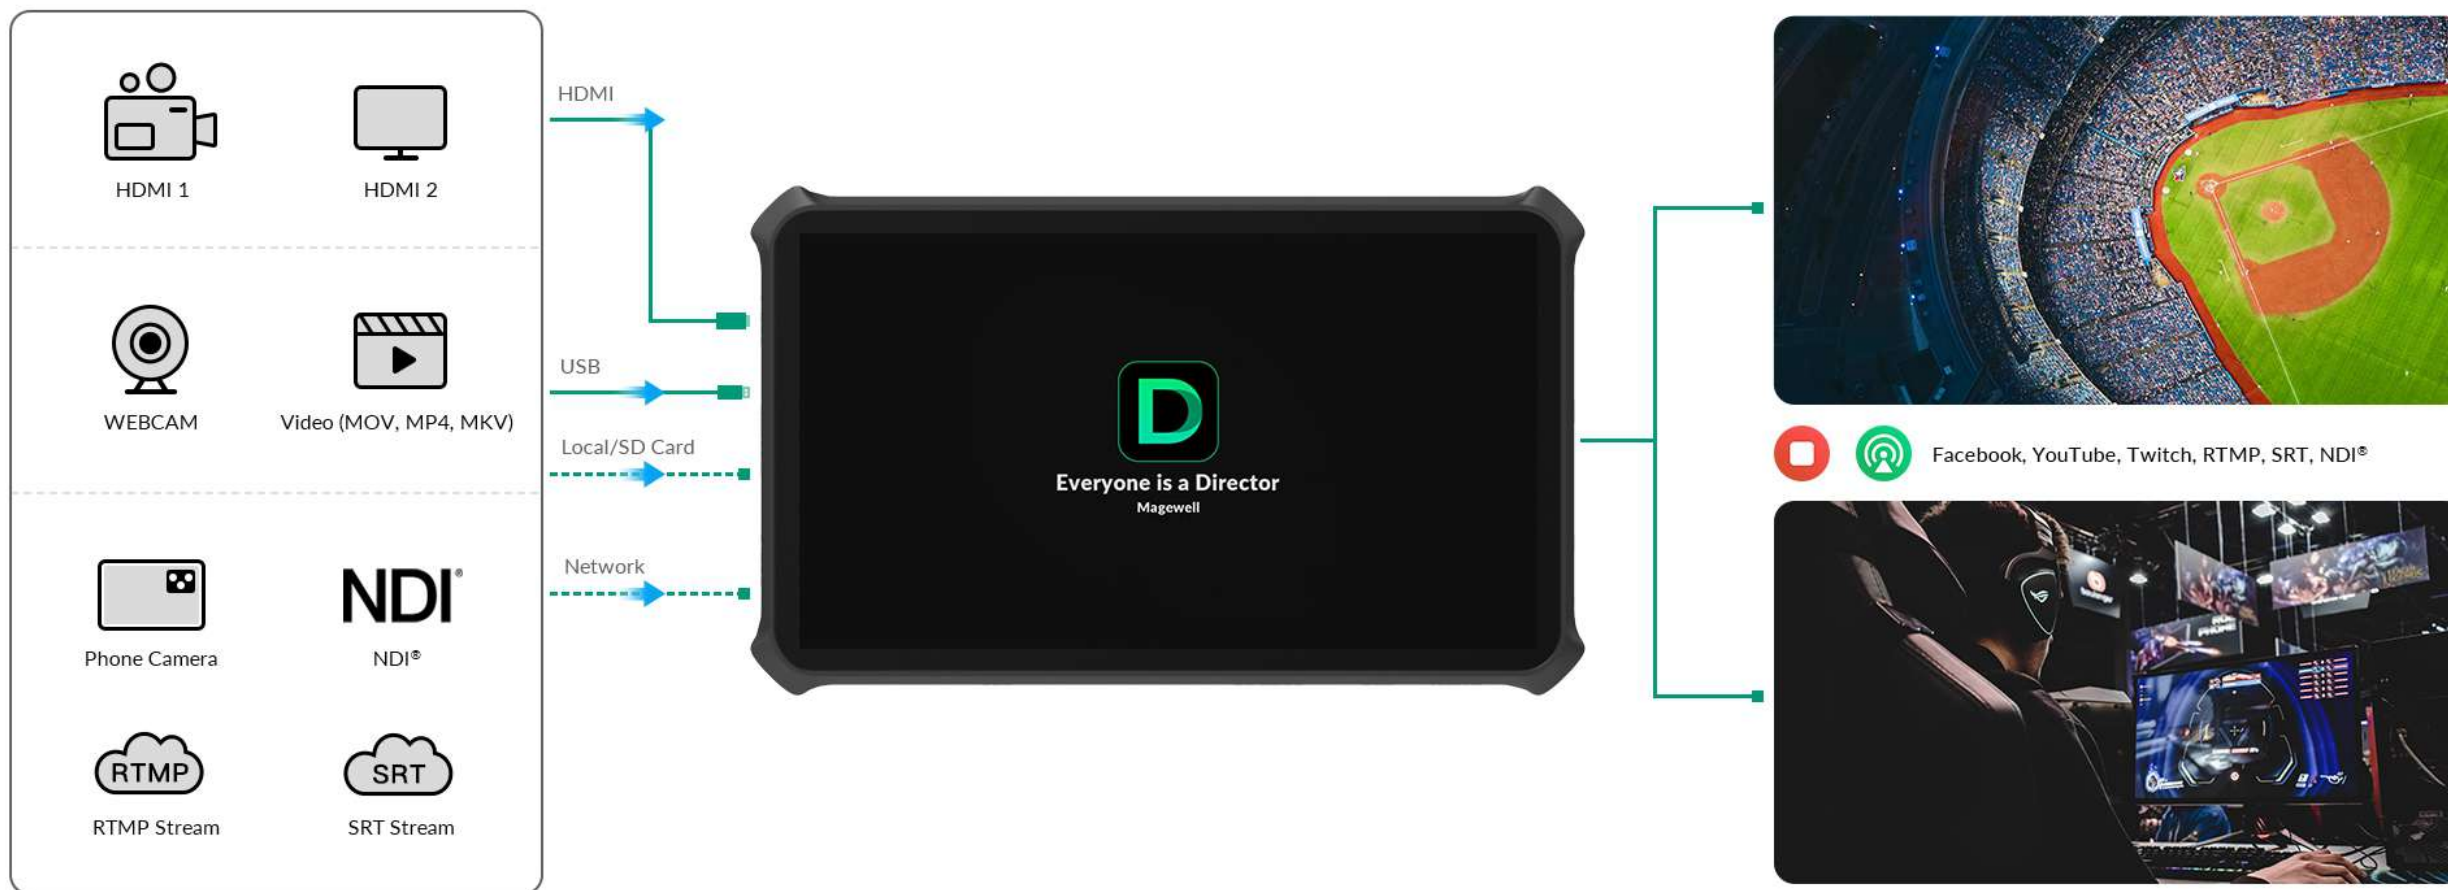

Key Features of Director Mini

- Supports multiple input sources, including 2x HDMI input, 2x USB 3.0 input, Phone Camera, [SRT](#) stream, [RTMP](#) stream, NDI[®] stream, video clips, and pictures
- Produces shows consisting of scenes with compositions of various sources, which can be edited with diverse powerful tools, such as keyer, flip and crop
- Natively supports streaming to YouTube, Twitch and Facebook Live, supports streaming via [SRT](#) and [RTMP](#), and supports two NDI[®] HX3 outputs
- Supports streaming to two destinations simultaneously, up to 1080p60 30Mbps
- Supports sending live comments as overlay when streaming to social media platforms
- Supports [GFX](#) function with rich templates, supports real-time control of scoreboard, timer and stopwatch, and supports using webpages as GFXs
- Supports the ability to switch scenes directly, or preview first and then program
- Supports Replay to capture and record highlights
- Supports more interactive functions such as background music, annotation and [FTB](#)
- Supports PTZ control for HDMI, WEBCAM (UVC Camera), [SRT](#), [RTMP](#) and NDI PTZ cameras
- Supports landscape and portrait modes of device screen and external screen
- Device has one USB-C output to connect the external screen for monitor, or connect to a computer to import and export files, and it also supports UAC/UVC output
- Records and takes screenshots to local storage or SD card, and exports to USB flash drive, SD card and computer
- Supports wired and wireless networks as well as Bluetooth 5.0, and supports network bonding for optimal streaming stability
- Supports two hot-swappable NP-F battery packs
- Supports Web UI for more settings and registering to Magewell Control Hub for centralized management. For details, please refer to the [Director Mini Web UI User Manual](#).

What's New

Firmware version: 2.4

Live Stream

- **Replay:** Replay allows you capture some of greatest moments, slow down the action and save your highlights.
- **Show Live Comment:** You can select one live comment as a overlay inside the video feed when streaming to social media.
- **Optimized encoding policy:** You can stream out 1 NDI and 1 non-NDI simultaneously.

GFX

- **Add Webpage GFX:** You can use a webpage as a **GFX**.
- **Select game time format:** You can select a preferred game time format when adding a common scoreboard or a baseball scoreboard.

PTZ

- **Control OBSBOT Webcam:** You can control OBSBOT webcams, enable AI human tracking, and record videos.
- **Improve PTZ control:** It supports controlling **PTZ** and **phone camera** in non-program view, and supports switching PTZ sources.

Show and Scene

- **Add RTMP push:** Director Mini can serve as a server to receive **RTMP** stream for the sender directly.
- **Support Full NDI input:** You can use Full NDI stream as an input source.
- **Optimized Annotation features:** The new UI of Pen enables more convenient annotation.
- **New switch mode:** It supports setting **FTB** duration separately and selecting Cut or Fade effect when quick switch is off.
- **More thumbnail sizes:** You can zoom scene thumbnails to three sizes, small, middle and large.
- **Select source by layer:** If multiple sources overlap with each other, you can select the covered layer.

- **Optimized color selector:** You can customize a color with different model, including HEX, RGB and HSL.

Audio

- **Set global or scene-based microphone audio:** You can set MIC, Bluetooth and USB audio globally or for each scene.

Others

- **Network Bonding:** You can use all available Internet connections to optimize live stream stability.
- **Output multi-view or preview via USB-C port:** The external screen display content supports Multi-view and Preview options, and you can even set Multi-view appearance.
- **OSC Remote Control:** Director Mini incorporates the OSC protocol, enabling you to operate the device effortlessly via the OSC protocol.
- **Check device status:** You can check the running status of the device in **Settings > System**.
- **Optimized Control Center:** It newly supports locking auto-rotate, checking device status, starting network bonding, and starting live streaming.

Firmware version: 2.3.576

Input information

- [View input information on the Control Center](#)

Show and scene

- [Import and export shows.](#)
- [Customize buttons displayed on the main screen](#)
- [Set switch action for BGM.](#)
- [Control zoom and focus of phone camera on the device.](#)
- [Set transition effect for video clip when it is set to switch to scene xx automatically.](#)

GFX

- [You can add a baseball scoreboard and control it.](#)

Audio

- Select Bluetooth audio input mode to use the Bluetooth device as an audio input source.
- Select default mixing mode for new audio input.
- Display and control Bluetooth and USB audio input independently on audio mixer

Recording and streaming

- Select NDI source for ISO recording
- Add 4 hours, 8 GB and 16 GB options for splitting recording file
- Select H.265 codec for encode and NDI server
- Set network priority for stream servers
- Select RTMP or HLS protocol for streaming to YouTube
- Supports RTMPS protocol for RTMP streaming

USB-C port

- Select UVC/UAC mode for audio and video output or MTP mode for file transfer when Director Mini is connected to a computer via the USB-C port.
- Set external screen in the Settings.

Firmware version: 2.2.650

- **Use External Touchscreen to Control the Device**

When the USB-C OUT port is connected to an external touchscreen to duplicate the screen, you can use the external touchscreen to control the device, so as to enlarge your canvas for better scene editing, annotation, etc.

- **More Frame Rate Options for Creating a Show**

You can select different frame rate when creating a show, and then the frame rates of recording, streaming, external screen and more will also change along, adapting to different scenarios.

- **ISO Recording**

Director Mini supports ISO recording. You can record two of PGM, HDMI 1, HDMI 2, WEBCAM 1 and WEBCAM 2, or record two-channel images with different quality for one source.

- **WEBCAM as Encoding Source**

When setting [Encode](#) or [editing NDI streaming server](#), you can select WEBCAM 1 or WEBCAM 2 as the encoding source.

- **Optimized Audio Mixer**

Audio input sources can be linked globally or disconnected with separated settings for each scene

- **NDI Tally**

During NDI streaming, the top status bar supports displaying the PGM and PVW status of the NDI signal. You can also set the [Back LED Lights](#) as NDI tally lights.



- **Adjusting Input Delay of USB Microphone**

You can adjust the input delay of USB microphone through  > Settings > Audio.

- **APIs for Third-party Control System**

Director Mini provides rich APIs for developers to interact with the device such as switch scenes, apply [GFX](#), play video and BGM, control audio and start/stop streaming and recording. These APIs are based on the Hyper Text Transfer Protocol (HTTP) and are lightweight and connectionless interfaces without response data. Visit [Director Mini API](#) for detailed understanding of each API's function and request mode.



Owners Guide

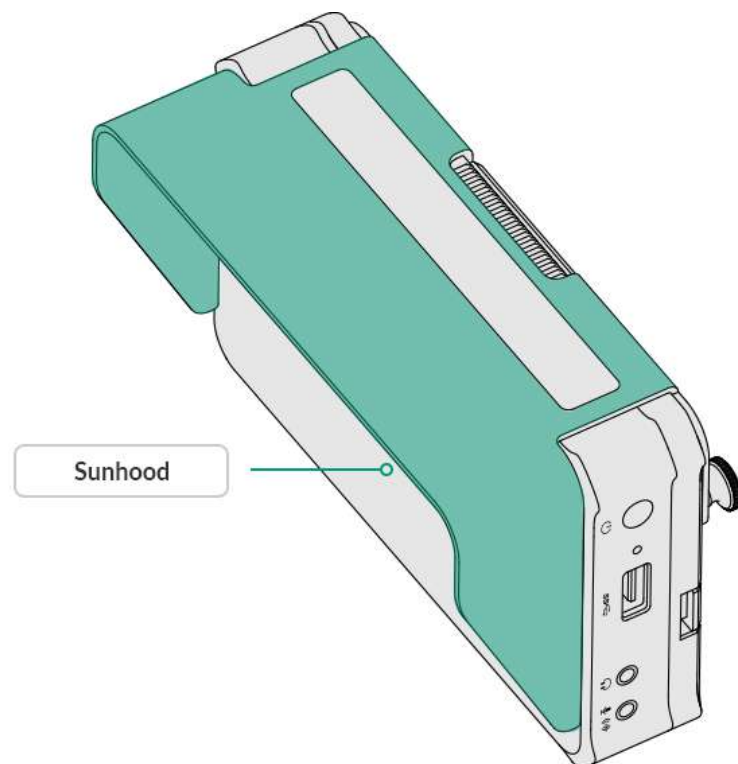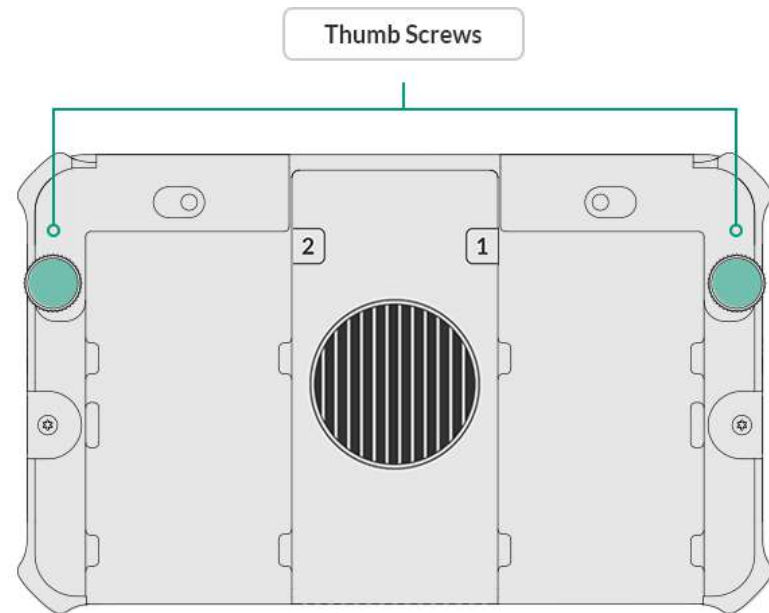

Getting Started

Make sure Director Mini is mounted safely before using it.

- Place the device on a flat and stable surface. Director Mini provides two detachable foldable stands for better heat dissipation and convenient operation. You can use the stands as needed.
 - **Install:** press the lock button first and put the stand into the slots until it is locked in the correct position.
 - **Remove:** press the lock button first and remove the stand.
- Mount the device with a tripod or camera through the 1/4" mount hole. The screw should be less than 5.5 mm (7/32 inches) long. Otherwise, you cannot firmly secure the device, and damage may occur.
- When using outdoors, you can use the sunhood to prevent glare on the screen by blocking out ambient light.
 1. Slide down the sunhood till the mounting holes line up with the mounting holds on the back of the device.
 2. Tighten the two thumb screws.

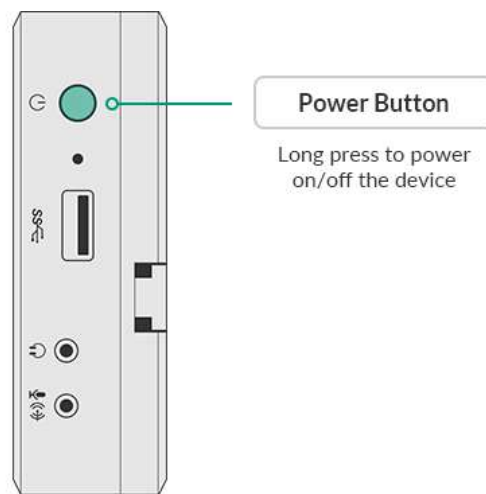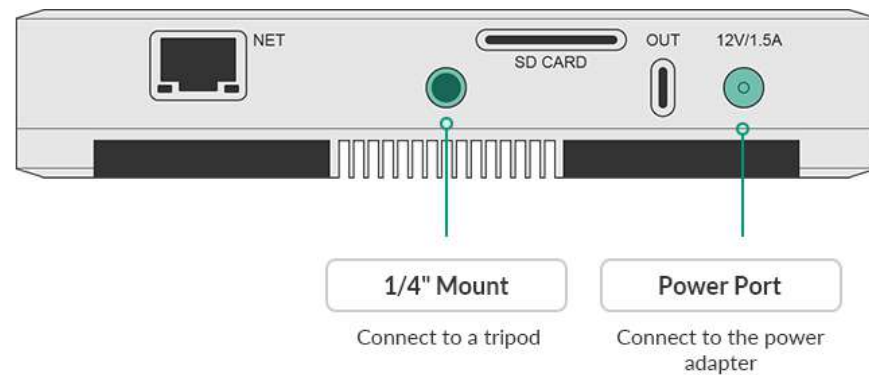

Connect to Power and Turn on the Device

Use the supplied power adapter to connect the power port.

💡 Director Mini also supports optional two hot-swappable NP-F battery packs. For more information, refer to [Battery](#).

Power Button Actions

Power on

Long-press the power button for 3 seconds to power on.

Power off

Long-press the power button till a menu bar pops up, and tap **Power off**.

Restart

Long-press the power button till a menu bar pops up, and tap **Restart**.

Screenshot

Long-press the power button till a menu bar pops up, and tap **Screenshot**, so that you take a screenshot which saves all the information on the screen and is stored in "\Director Mini\Internal shared storage\Pictures\Screenshots".


Turn off the screen

Short-press the power button to turn off the screen, and press it again to turn on the screen.

Complete Initial Settings

The first time you power on your Director Mini device or after you reset the device, you will be prompted to select your language, set your device name and read End User License Agreement (EULA). Please follow the guide step by step to complete the initial settings.

Next, you can select to load a show in landscape or portrait mode.

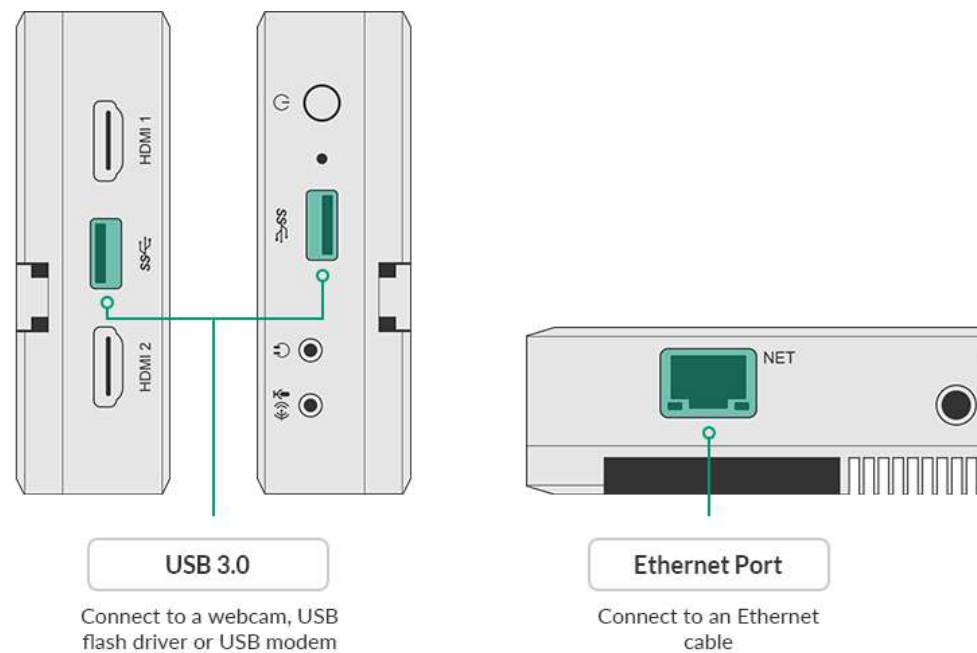

Then, you can follow the on-screen guide to know the functions of buttons on the screen. After that, you enter the default show, which consists of 5 scenes, a default picture, HDMI 1, HDMI 2, webcam, and phone camera.

Then, you can connect HDMI and webcam sources.

Meanwhile, you can use your phone to download the Director Utility App, and then try to connect Phone Camera. For details, please refer to

[Director Utility App User Manual](#).

Connect to Network

Director Mini supports wired and Wi-Fi networks. These networks can be connected at the same time. The priority order for the device selecting network connection is Ethernet > Wi-Fi > Cellular.

- **Connect to Ethernet**

Use an Ethernet cable to connect the Ethernet port.


- **Connect to Wi-Fi**

Tap  > **Settings** > **Network** to connect Wi-Fi. For details, please refer to [Network](#).

- **Connect to Cellular**

Insert a USB modem to the USB port.

Refer to [USB Modem supported by Magewell Products](#) for more details.

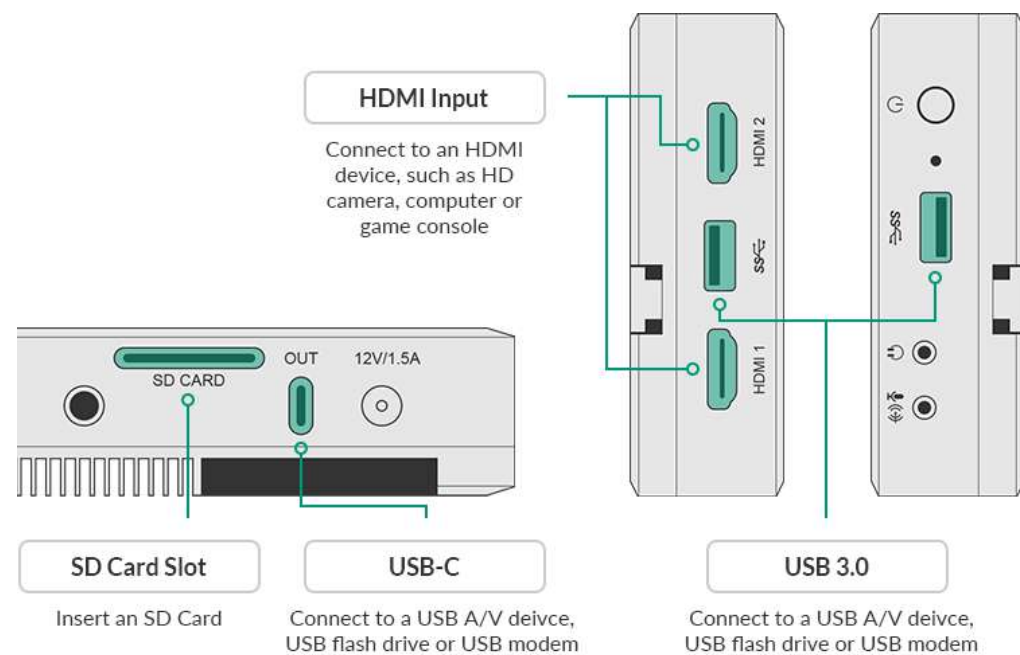

Connect to Input Devices

Director Mini supports various sources, including HDMI sources, webcam, stream, Phone Camera, video clips and pictures. You can connect one or more sources to Director Mini according to the following introductions.

💡 For how to connect to stream and Phone Camera source, please refer to:

- [Add RTMP Stream](#)
- [Add SRT Stream](#)
- [Add NDI Stream](#)
- [Add Phone Camera](#)

▪ Connect to HDMI source

Connect one or two HDMI devices, such as HD camera, computer and game console, to the HDMI ports of Director Mini. It supports to capture signals from the two HDMI ports at the same time. The thumbnail of the corresponding input signal appears in the scene list of default show.

Supported typical HDMI inputs include:

- 4096x2160p/3840x2160p 23.98/24/25/29.97/30/59.94/60
- 1920x1080p 23.98/24/25/29.97/30/50/59.94/60
- 1920x1080i 25/29.97/30
- 1280x720p 23.98/24/25/29.97/30/50/59.94/60
- 720x576p 50/100
- 720x576i 25/50
- 720x480p 59.94/60
- 720x480i 29.97/30

When you connect a PC as the HDMI source, you need to select Director Mini as the audio output device on the PC. For example, on Windows 10, click  >  > System > Sound. In the Output section, choose **Director Mini (*****)** from the drop-down list box of **Choose your output device**, such as **Director Mini (Intel(R) Display Audio)**.

- **Connect to WEBCAM**

Connect webcams to the USB ports of Director Mini.

Supported webcam specifications include:

- Formats: YUYV, MJPG, NV12
- Resolution: up to 1920x1080
- Frame rate: up to 60 fps

Refer to [webcam frame rate information](#) for decide how to connect your webcams.

- **Connect to media source**


Insert a SD card or USB flash drive to import picture, video and audio files.

The supported file system types include: FAT32 (The maximum file size is 4GB.), exFAT, and NTFS.

Director Mini also supports transferring files through the computer. For more details, refer to [How to import/export files](#).

For more information about the devices supported by USB 3.0 ports, please refer to [How to use the USB 3.0 ports](#).

The USB-C port is a multifunctional port. You can refer to [what can the USB-C OUT port be used for?](#)

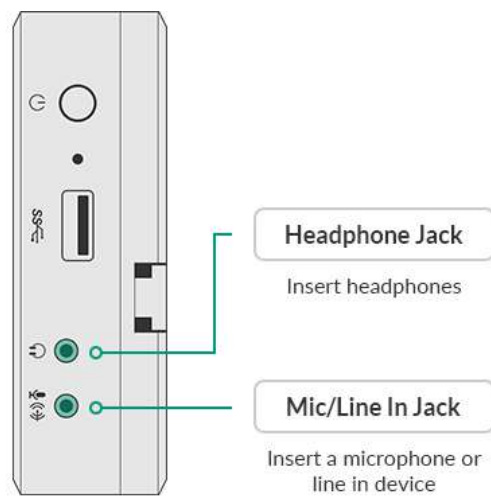

Connect to Audio Devices

- **Connect microphone or line in device**


Connect an active microphone or line in device to the Mic/Line In jack on Director Mini, and select the device type according to the prompt. For MIC device, the system will automatically provide 20dB gain. It also supports HDMI microphone or USB microphone.

- **Connect headphones**

Connect your headphones to the Headphone jack on Director Mini to monitor the audio.

It also supports USB audio playback device.

You can also use a Bluetooth device for audio output or input, and please refer to [Bluetooth](#).

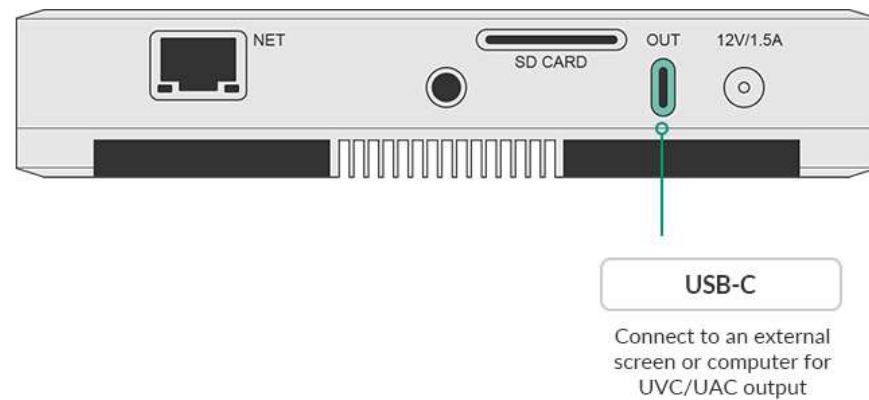


(Optional) Connect to External Screen

Director Mini can be connected to an external screen through the USB-C OUT port, supporting 1920x1080@60Hz or 1920x1080@50Hz according to the show's frame rate. For the details, please refer to [Mapping between the show's frame rate and each output frame rate](#).

Besides, when Director Mini is connected to an external touchscreen and set to "Duplicate Screen", you can use the external touchscreen to control the device, so as to enlarge your canvas for better scene editing, annotation, etc.

1. Use a Type-C to HDMI / VGA / DP adapter to connect a monitor, HDTV or other devices to the USB-C OUT port of Director Mini. The external screen setting page will pop up on the device.
2. Select the content to be displayed on the external screen.
 - Clean Program: output a clean program signal.
 - Preview: output preview signal
 - Multi-view: display 8 video boxes showing scene thumbnails at the bottom, and two larger boxes at the top, with the left one showing Preview view and the right one showing Program view. You can change the Multi-view appearance, referring to [USB Type-C](#).
 - Duplicate Screen: duplicate all the elements on the device screen of Director Mini.
 - Loop HDMI 1: loop out the signal from HDMI 1.
 - Loop HDMI 2: loop out the signal from HDMI 2.
3. Select the rotation angle to fit for the external screen: rotate 90° to left, or rotate 90° to right.
4. Tap the device screen to go back.

5. To change the settings of the external screen, swipe down from the top of the device screen, and then tap  on the Control Center to open the external screen setting window.

💡 Notice for using the external touchscreen to control Director Mini:

- The external touchscreen must support HID multi-touch function (no need of driver).
- Connect the touchscreen and Director Mini with a Type-C to Type-C cable. If you use a Type-C adapter, please connect the Touch Function port of the touchscreen to the device. For details, please refer to your touchscreen's user manual.
- Select Duplicate Screen as the displayed content.
- The external touchscreen should keep the full screen mode and the same orientation as the Director Mini device.

The USB-C port also supports to connect a computer for UVC/UAC output, connect a USB-C hub for more A/V input, etc. For details, refer to [What can the USB-C OUT port be used for?](#)

Main Screen


Director Mini provides lots of easy-to-use buttons on the main screen, and supports landscape mode and portrait mode. You can produce and stream your show very easily.



Main Screen

Status Bar

The status bar helps you know the working status of the device.

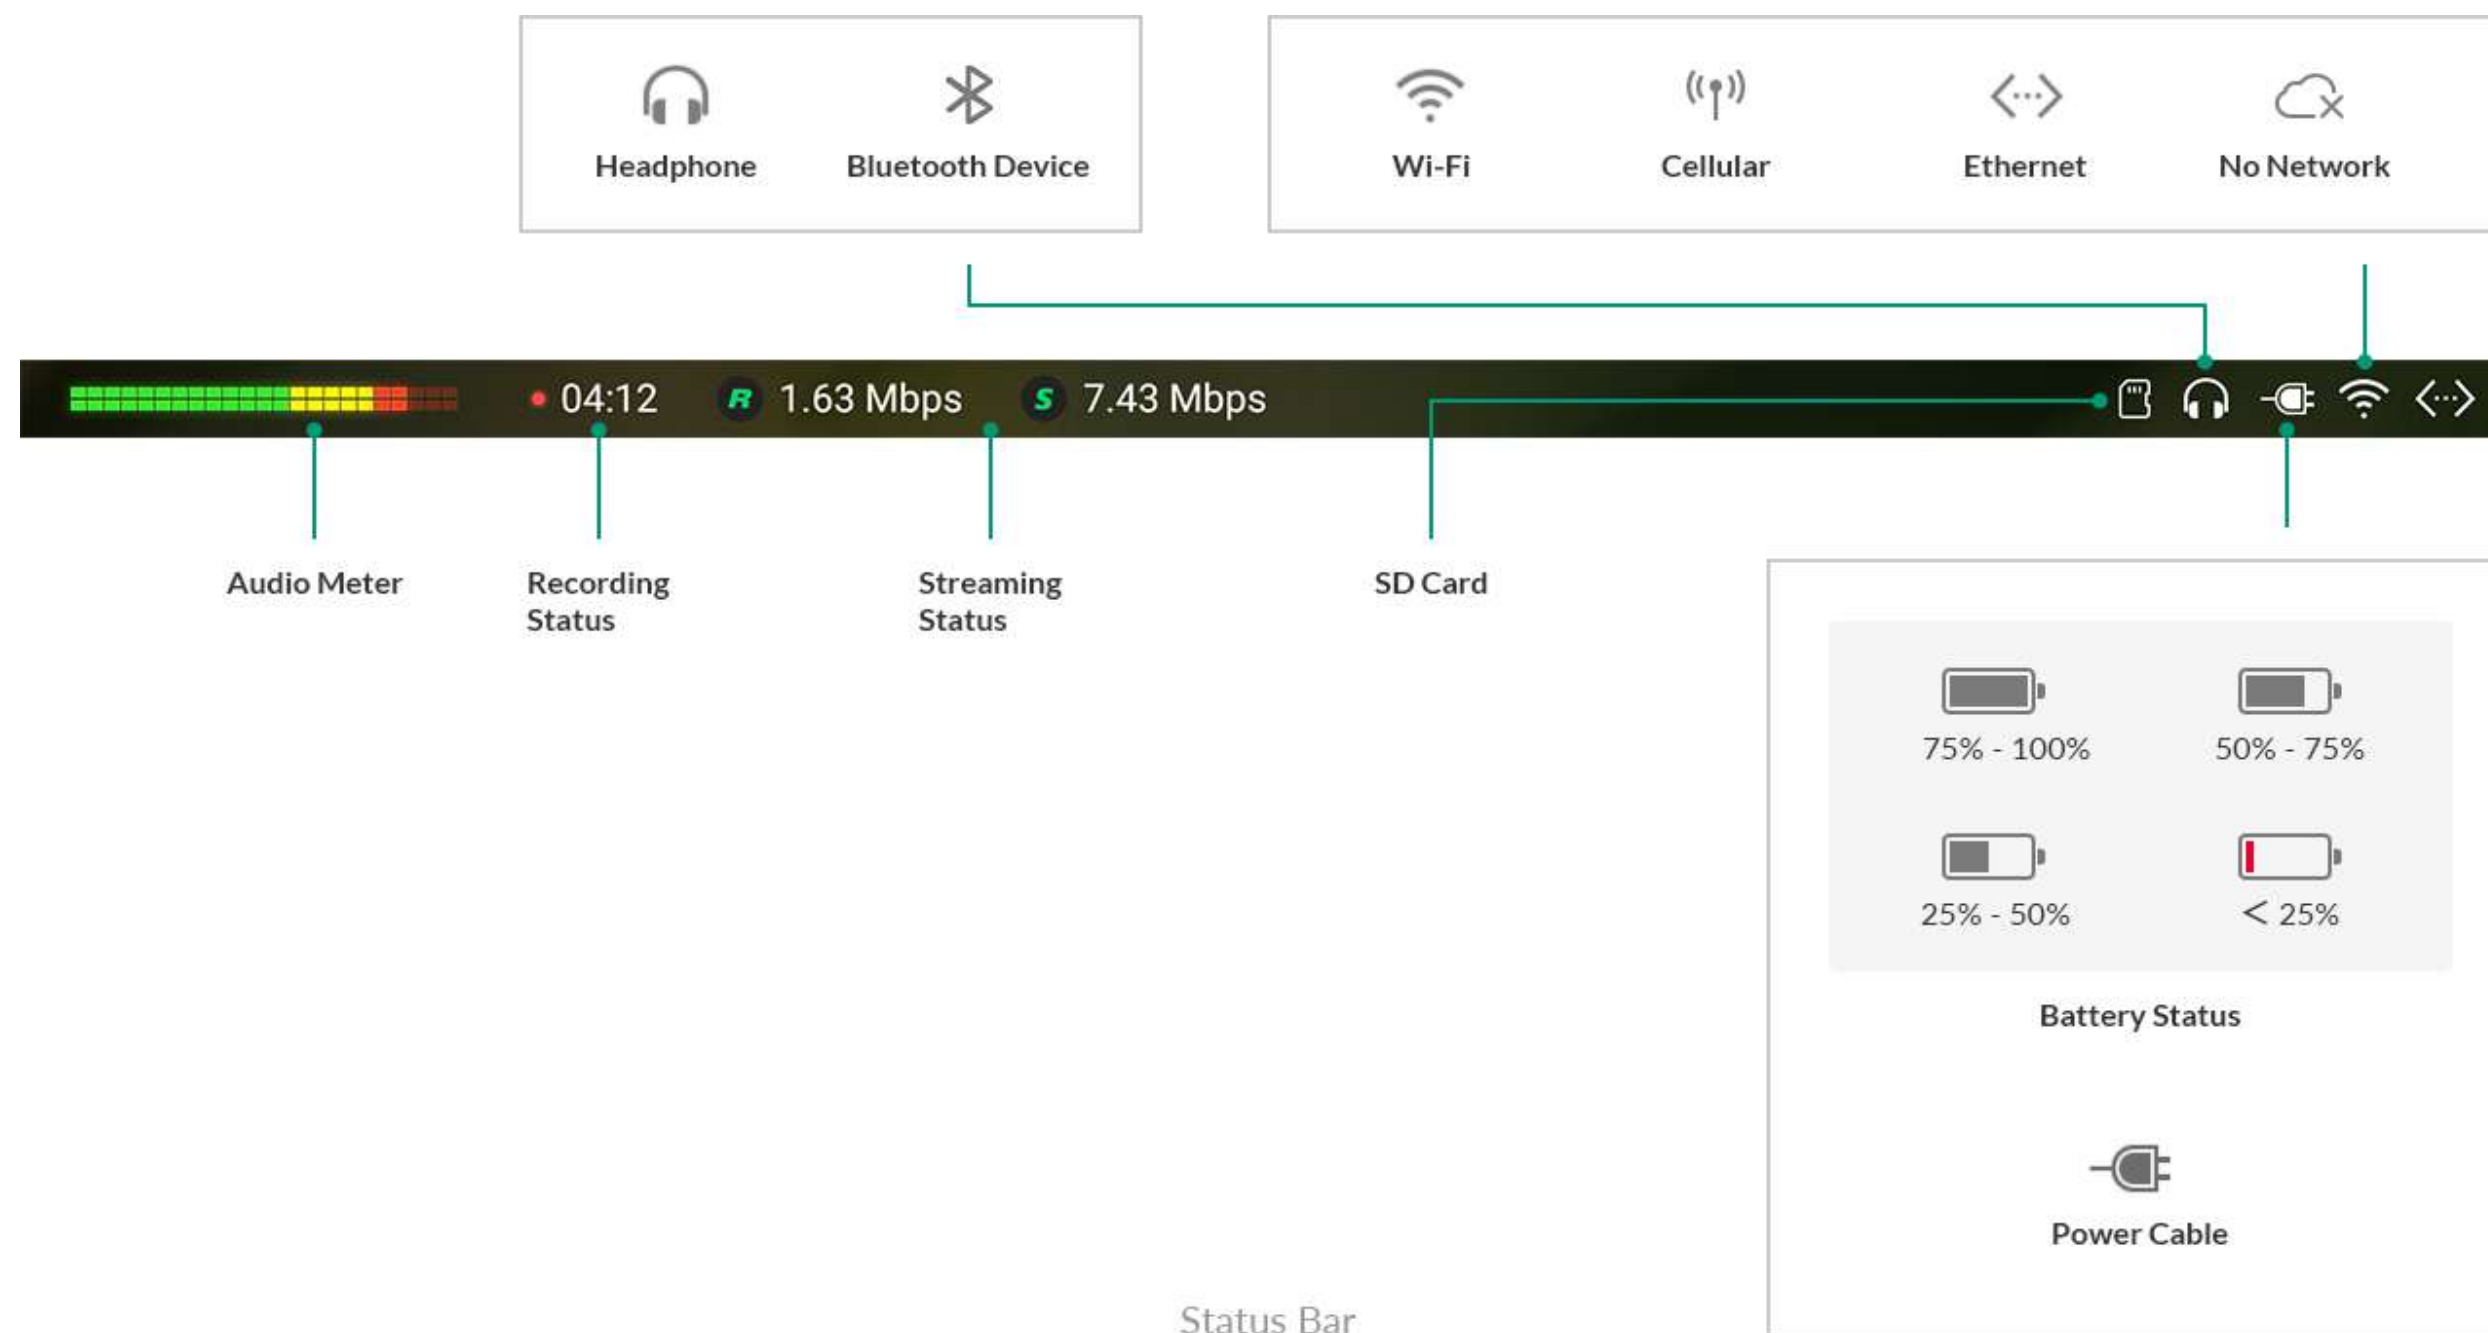



Control Center

The control center provides more information of the device and enables quick settings.

Swipe down the status bar to open the control center. To close the control center, swipe up on the screen.

The control center provides the following functions and information.

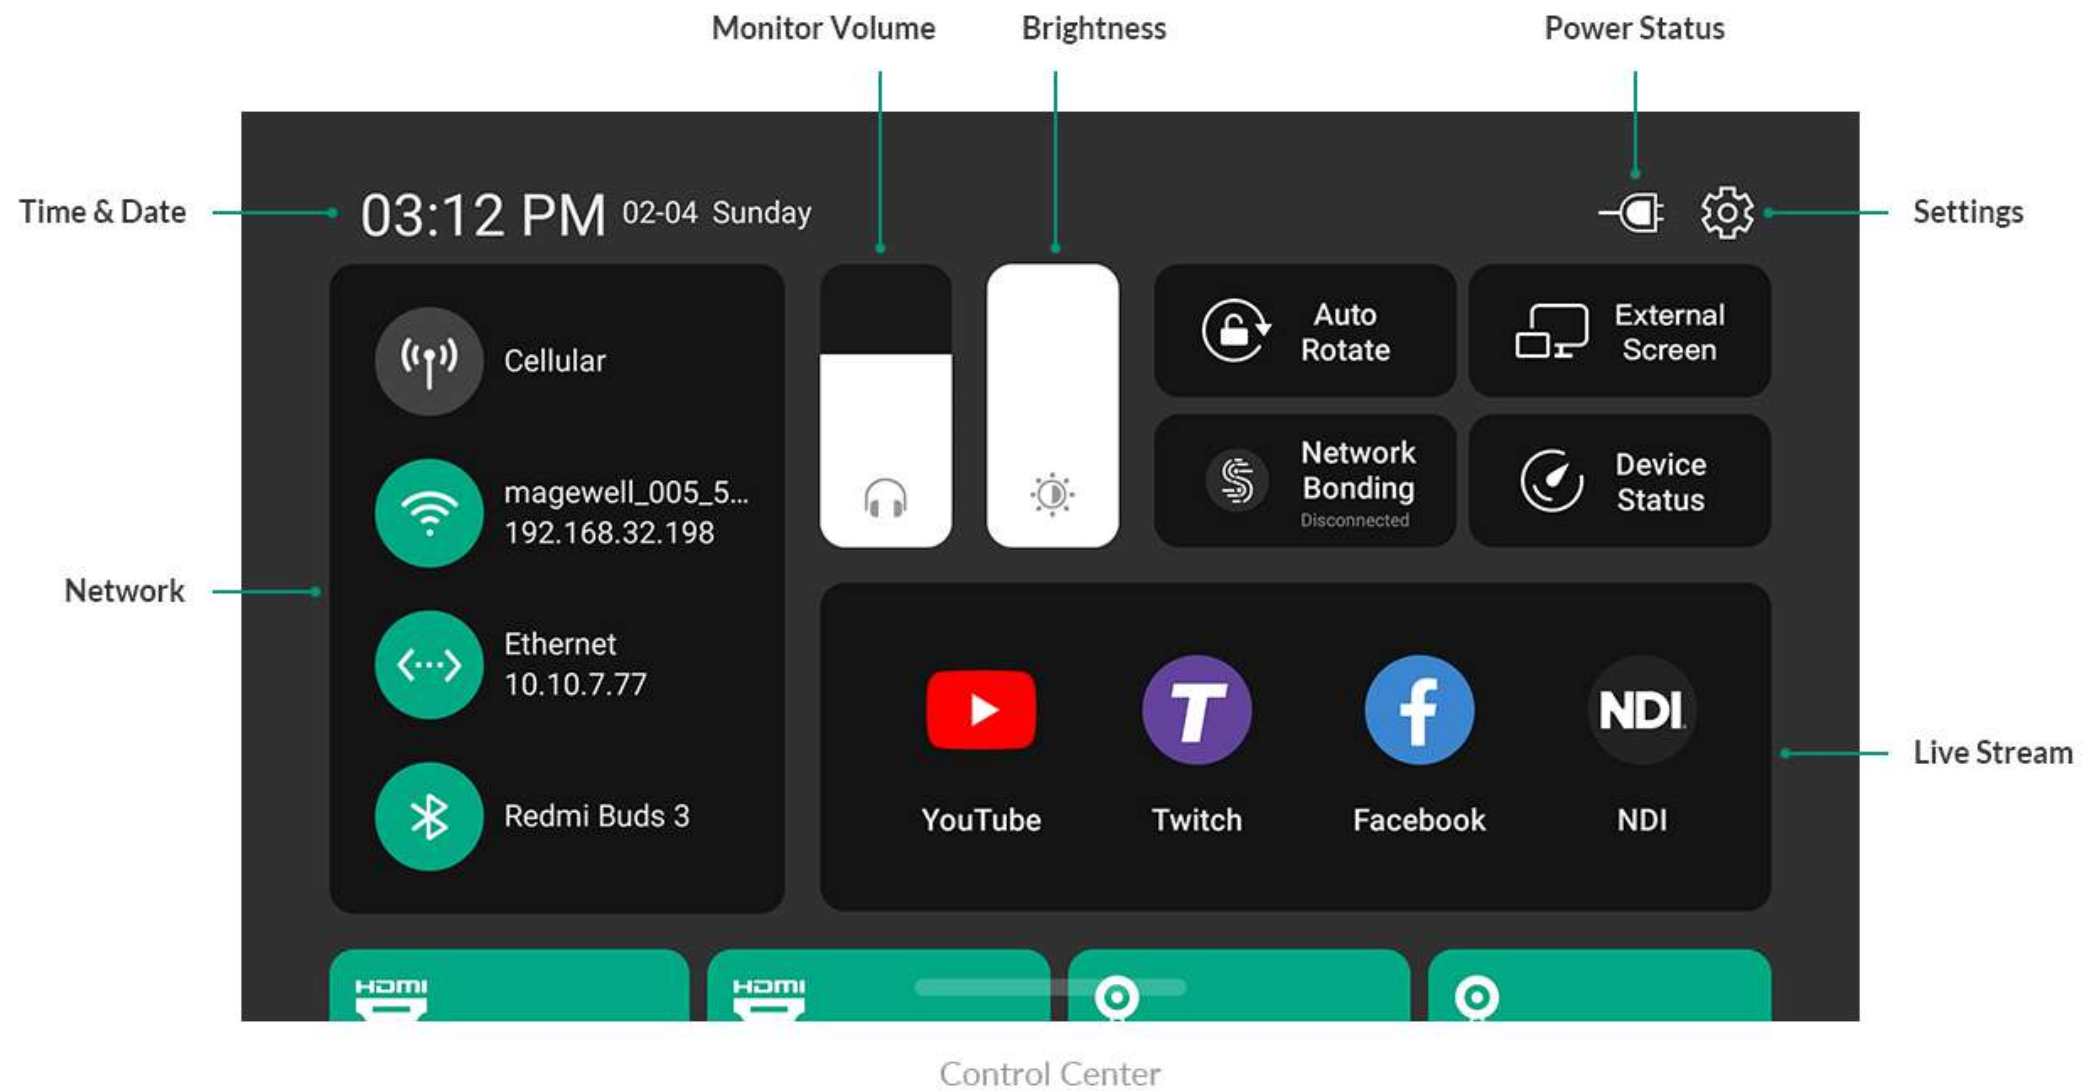

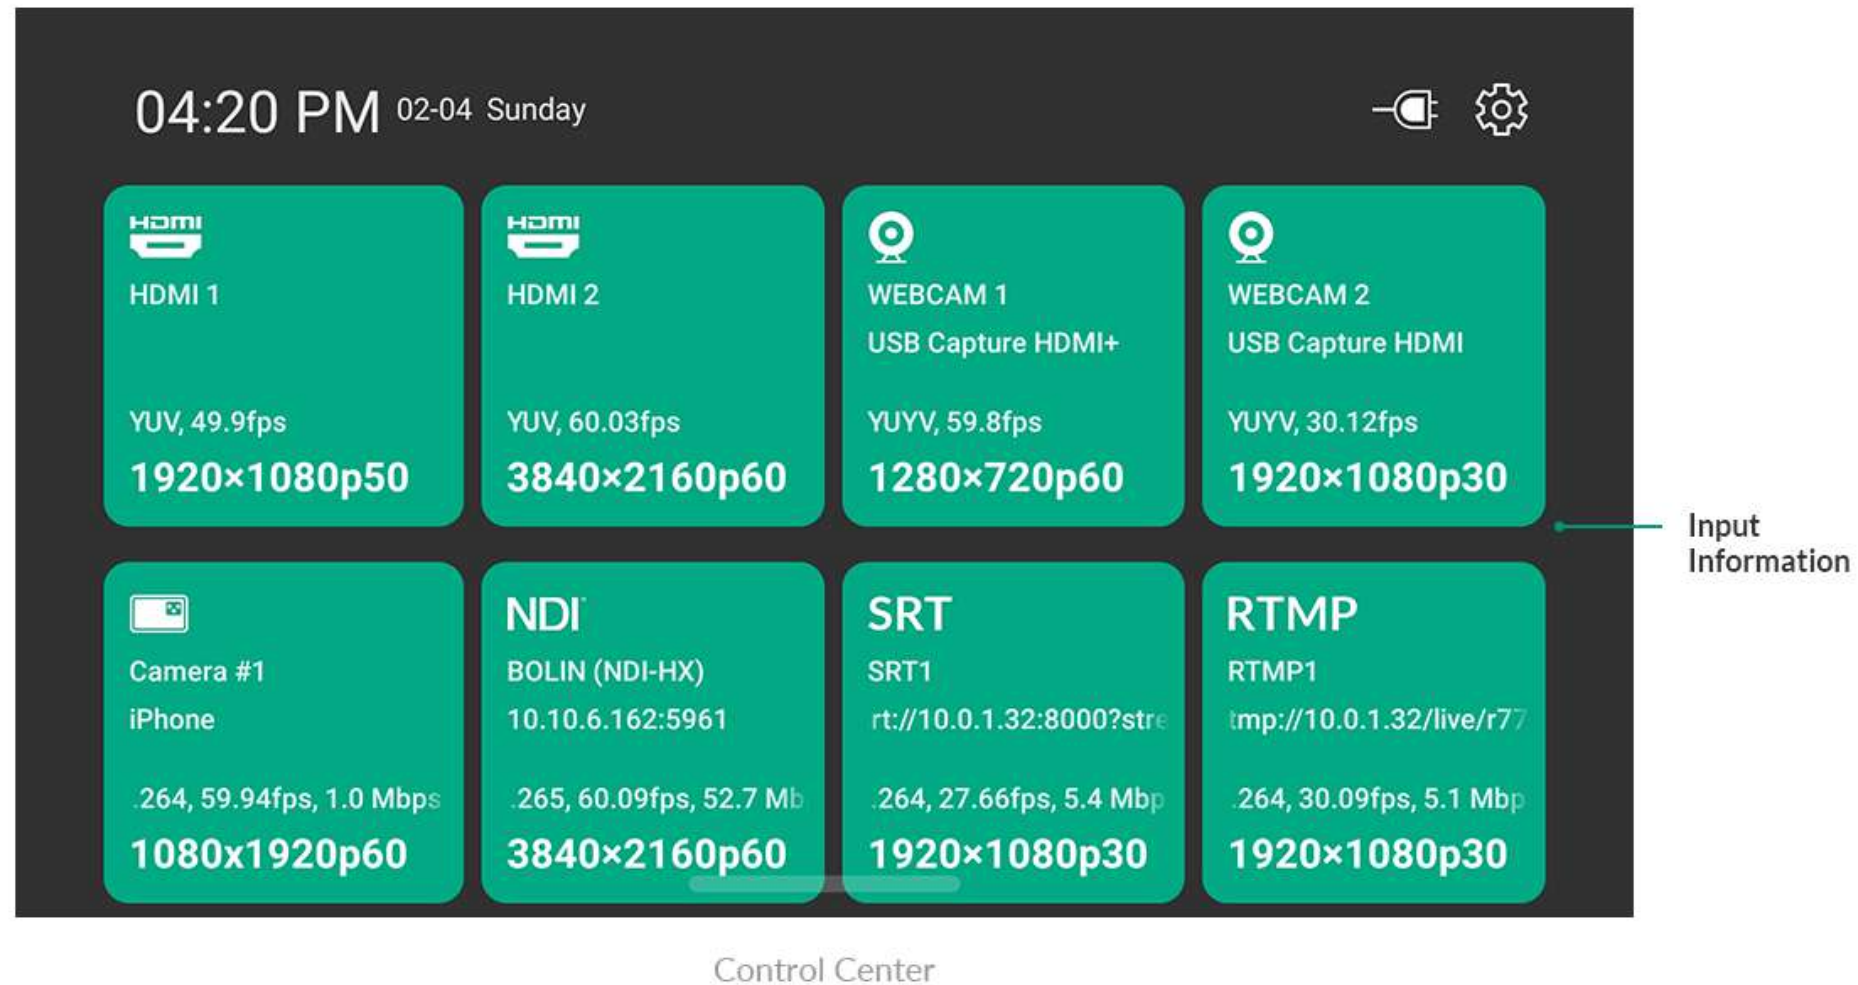

Input Information

You can scroll down the control center to view the information of the input sources of current show, in which HDMI and WEBCAM are always displayed, while IP inputs and phone camera are displayed when they are added to scenes.

- **HDMI 1:** the input status of the HDMI 1 port
 - *Format:* the color format of HDMI input, such as YUV and RGB
 - *Real-time frame rate:* the real-time frame rate of HDMI input


- *Resolution/frame rate*: the original resolution and frame rate of HDMI input, such as 1920x1080p60
- *Disconnected*: no input source connected.
- **HDMI 2**: the input status of the HDMI 2 port
 - *Format*: the color format of HDMI input, such as YUV and RGB
 - *Real-time frame rate*: the real-time frame rate of HDMI input
 - *Resolution/frame rate*: the original resolution and frame rate of HDMI input, such as 1920x1080p60
 - *Disconnected*: no input source connected
- **WEBCAM 1**: the input status of WEBCAM 1
 - *Device name*: the device name of WEBCAM 1
 - *Format*: the video format of WEBCAM input, such as YUYV, NV12 and MJPEG
 - *Real-time frame rate*: the real-time frame rate of WEBCAM 1
 - *Resolution/frame rate*: the resolution and frame rate of WEBCAM 1 which is set when you add the source in a scene, such as 1920x1080p60
 - *Disconnected*: no input source connected or added to a scene
- **WEBCAM 2**: the input status of WEBCAM 2
 - *Device name*: the device name of WEBCAM 2
 - *Format*: the video format of WEBCAM input, such as YUYV, NV12 and MJPEG
 - *Real-time frame rate*: the real-time frame rate of WEBCAM 2
 - *Resolution/frame rate*: the resolution and frame rate of WEBCAM 2 which is set when you add the source in a scene, such as 1920x1080p60
 - *Disconnected*: no input source connected or added to a scene
- **NDI®**: the input status of NDI stream
 - *Stream name*: the name of NDI stream
 - *URL*: the URL of NDI stream

- *Codec*: the codec information of NDI stream, such as H.264 and H.265
- *Real-time frame rate*: the real-time frame rate of NDI stream
- *Bitrate*: the real-time bitrate of NDI stream
- *Resolution/frame rate*: the original resolution and frame rate of NDI stream
- *Disconnected*: no NDI input signal
- **RTMP**: the input status of RTMP stream
 - *Stream name*: the name of RTMP stream
 - *URL*: the URL of RTMP stream
 - *Codec*: the codec information of RTMP stream, such as H.264 and H.265
 - *Real-time frame rate*: the real-time frame rate of RTMP stream
 - *Bitrate*: the real-time bitrate of RTMP stream
 - *Resolution/frame rate*: the original resolution and frame rate of RTMP stream
 - *Disconnected*: no RTMP input signal
- **SRT**: the input status of SRT stream
 - *Stream name*: the name of SRT stream
 - *URL*: the URL of SRT stream
 - *Codec*: the codec information of SRT stream, such as H.264 and H.265
 - *Real-time frame rate*: the real-time frame rate of SRT stream
 - *Bitrate*: the real-time bitrate of SRT stream
 - *Resolution/frame rate*: the original resolution and frame rate of SRT stream
 - *Disconnected*: no SRT input signal
- **Phone Camera**: the input status of phone camera


- *Camera name*: the custom name of phone camera
- *Phone name*: the custom name or model of your phone
- *Codec*: the codec information of phone camera
- *Real-time frame rate*: the real-time frame rate of phone camera
- *Bitrate*: the real-time bitrate of phone camera
- *Resolution/frame rate*: the original resolution and frame rate of phone camera which is set when you add the source to a scene.
- *Disconnected*: no phone camera input signal


Tutorials

The following tutorials will enable you to produce your first show and start to stream and record quickly.

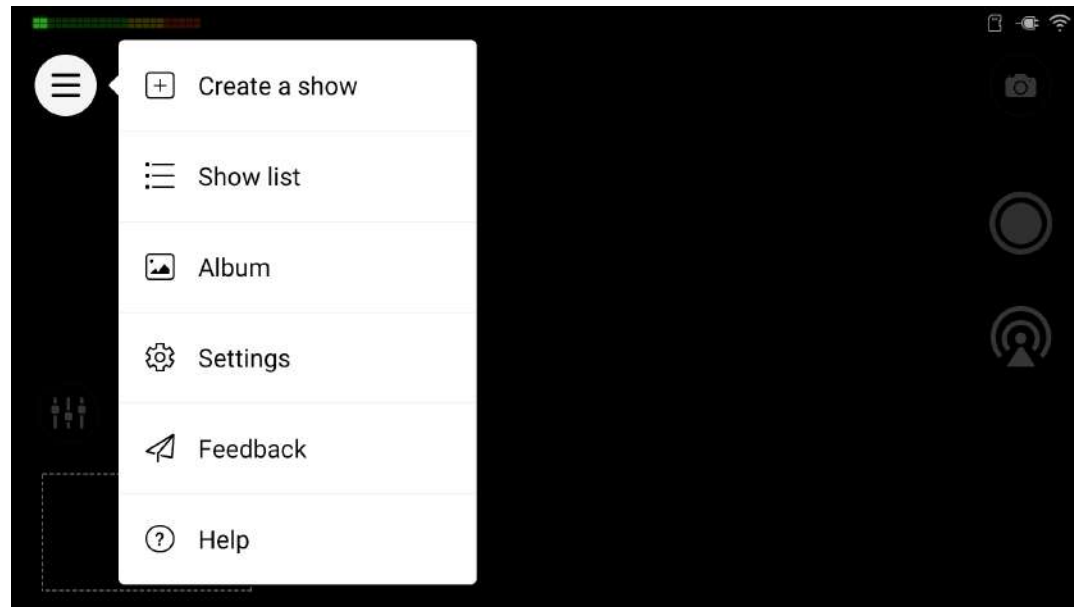



Create Show

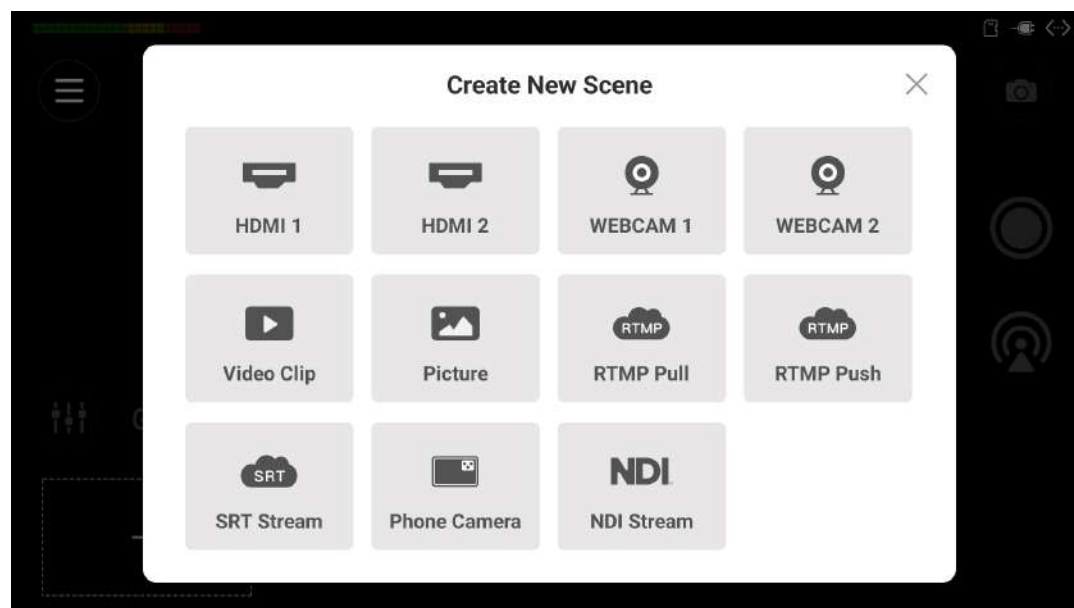1. Tap  > **Create a show**.
2. Specify the **Show name** and **Frame rate**, and select the **Orientation** (16:9 or 9:16).
3. Tap **Create**.
You will enter the new show.




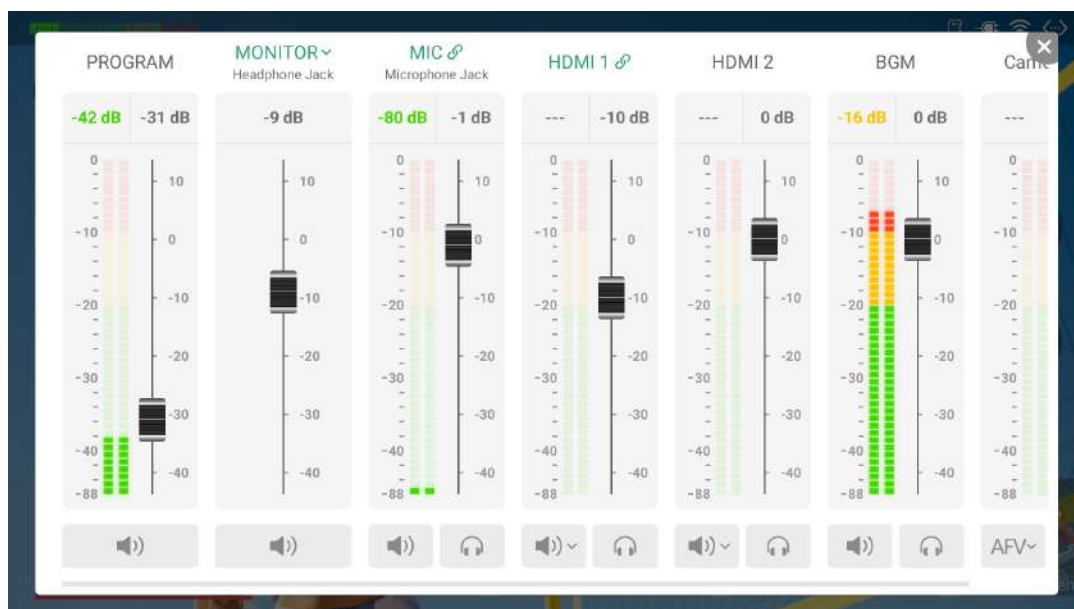
Create Scenes

1. Tap  on the screen.
2. In the **Create New Scene** window, select a source that you want to put into the new scene, and follow the popup to go on operating.
3. Edit the scene in the **Scene Editor**.
4. Save the changes you have made, and then the thumbnail of the new scene will be added to the end of the scene list.
5. Tap  to create more scenes.






Switch Scenes


- Swipe the scene list to left or right to browse scenes, and tap thumbnails to switch scenes.
- Tap any empty area of the screen to view the scene in full-screen mode, and tap any empty area again to exit the full-screen mode.
- If a scene contains a video clip source, you can tap the play and pause buttons to control the video.
- Swipe the scene list down to the bottom to hide it, and then you can tap  or swipe up from bottom to expand it.









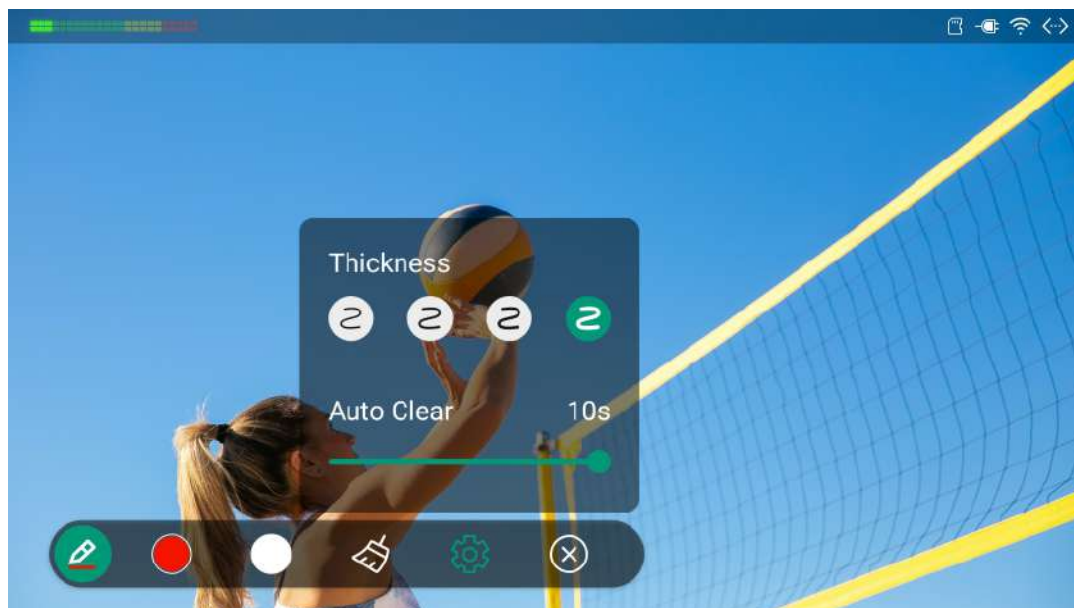

Adjust Volume

Tap  to open the audio mixer.






- Swipe left and right to view the connected audio sources and external audio sources. When the current scene contains video or BGM, they will also be displayed.
- Move the fader to adjust the audio level, and set the audio mixing mode by tapping the icon under the audio meter (in portrait mode, on the right).
- Tap  to only monitor this audio, and tap  to cancel.
- Tap **MONITOR** to select a monitor device, and set whether to monitor microphone input.





GFX

1. Tap  and then tap  to open the **Create New GFX** window.
2. Select a **GFX** type to create a **GFX**.
3. Tap  to create more GFXs.
4. Select one or more GFXs in the **GFX** list to display in the show.
5. If  scoreboard,  timer or  stopwatch is applied, you can tap the icon or long-press the **GFX** thumbnail and select **Control** to open the control panel for controlling. (For portrait mode, you may need to tap  and then tap the icon.)
6. Tap  to go back to the scene list.


Annotate on Screen

1. Tap  to enter the annotation mode.
2. Draw or write on the screen to annotate.
3. Tap  to expand the toolbar.
 - Tap **Color 1** or **Color 2** to switch the pen color, and tap **Color 1** or **Color 2** again to set color for each.
 - Tap  to clear the annotations.
 - Tap  for to set pen thickness and auto clear time.
 - Tap  to exit the annotation mode.

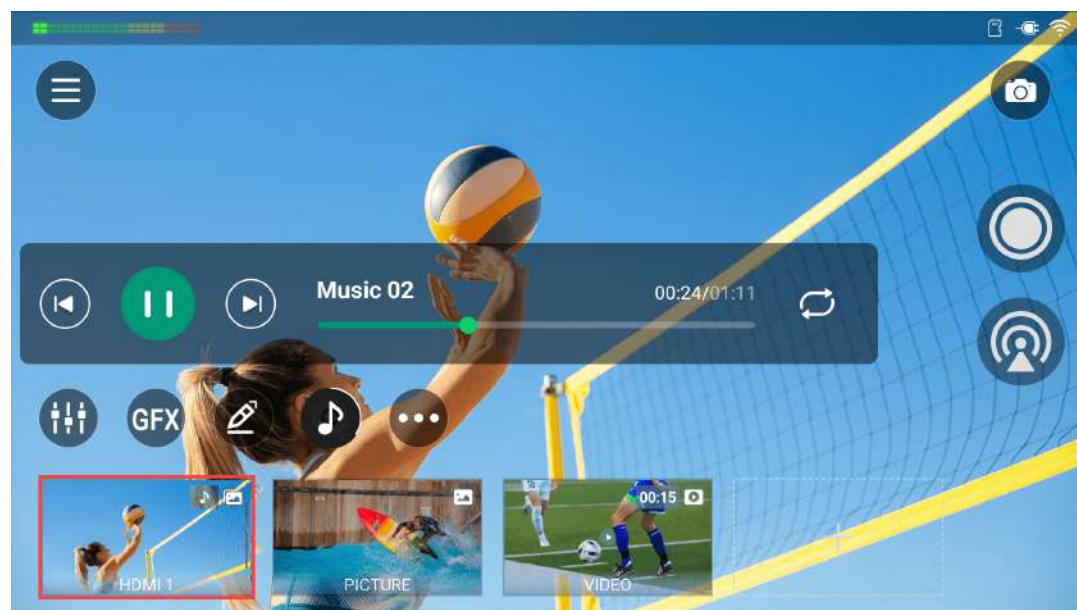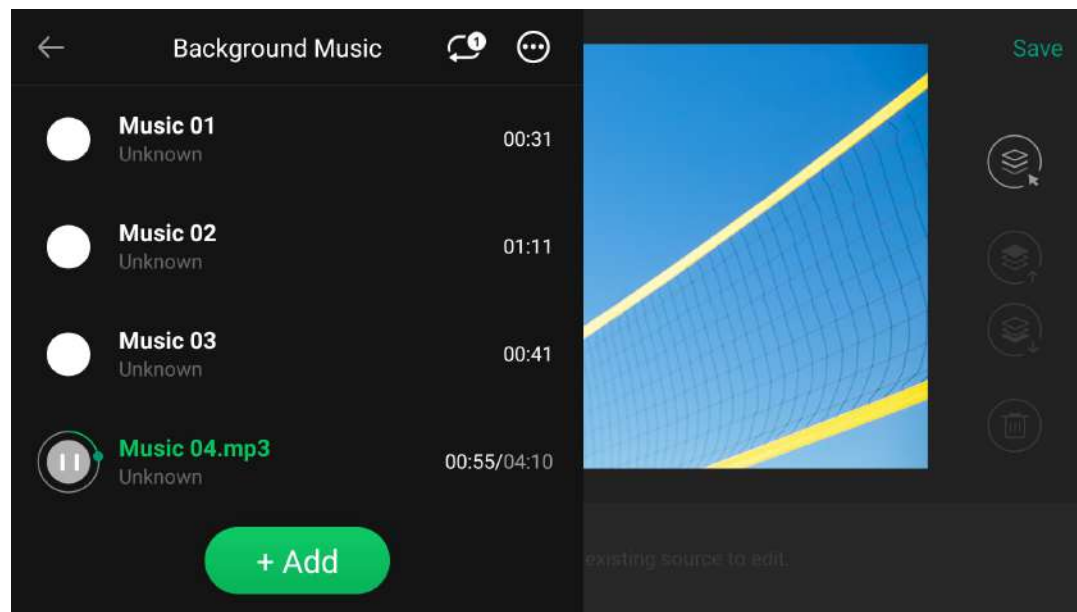






Background Music

Add BGM







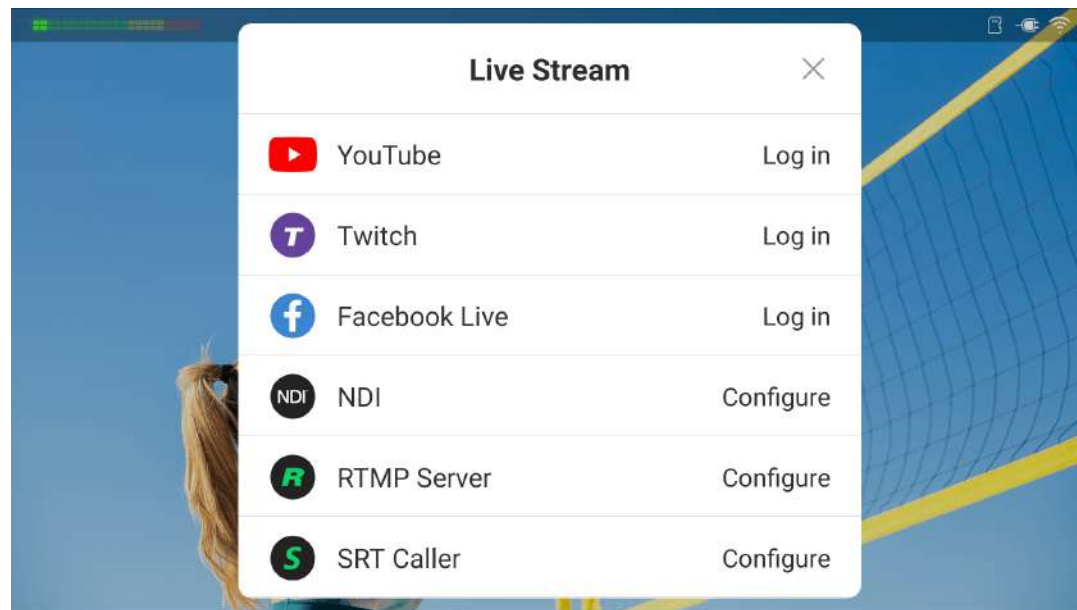

1. Long-press a scene thumbnail, and tap **Edit**.
2. In the Scene Editor, tap  to select a song from a storage path.
3. On the **Background Music** page, add more music and set playback policy and more actions by tapping the two buttons on the upper right corner.

Control BGM

1. On the main screen, tap  to reveal the BGM playback bar.
2. Tap the buttons on the playback bar to control the BGM playback. You can:
 - Start or stop BGM playback.
 - Play the previous or next song.
 - Drag the playhead to a desired time point.
 - Change the playback policies.
 -  : Repeat the playlist. (default policy)
 -  : Repeat the selected song.
 -  : Shuffle the playlist.



Live Stream, Record and Screenshot


1. Tap  and select a target platform to configure, such as [RTMP](#), and then tap  to go back.
2. Tap  to start streaming, tap  to start recording, and tap  to take screenshots.
3. Tap  to set and show live comments when streaming to YouTube, Twitch or Facebook. Long-press one comment to send it as an overlay.
4. Tap  to stop streaming, and tap  to stop recording.

Produce Your Show


Director Mini enables simple video production by allowing you to build a run of shows which contain a series of scenes, while each scene consists of live sources, video clips, images, text, etc.

Create and Manage Shows


You can create and manage multiple shows in Director Mini.

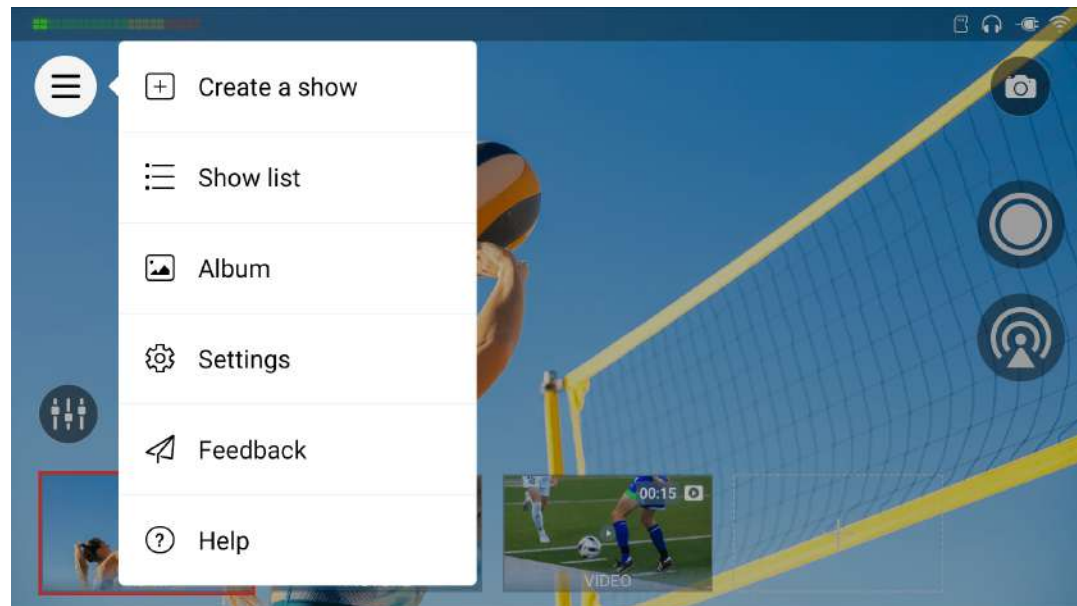

Create Show

1. Tap  > **Create a show**.
2. Enter your show name, and then tap **Save**.
3. Select the frame rate. Options include 60/59.94/50/30/29.97/25/24/23.98 fps.
4. Choose the screen orientation: 16:9 (landscape), 9:16 (portrait).
5. Tap **Create**.


After you create a show, the show is opened as the current show.

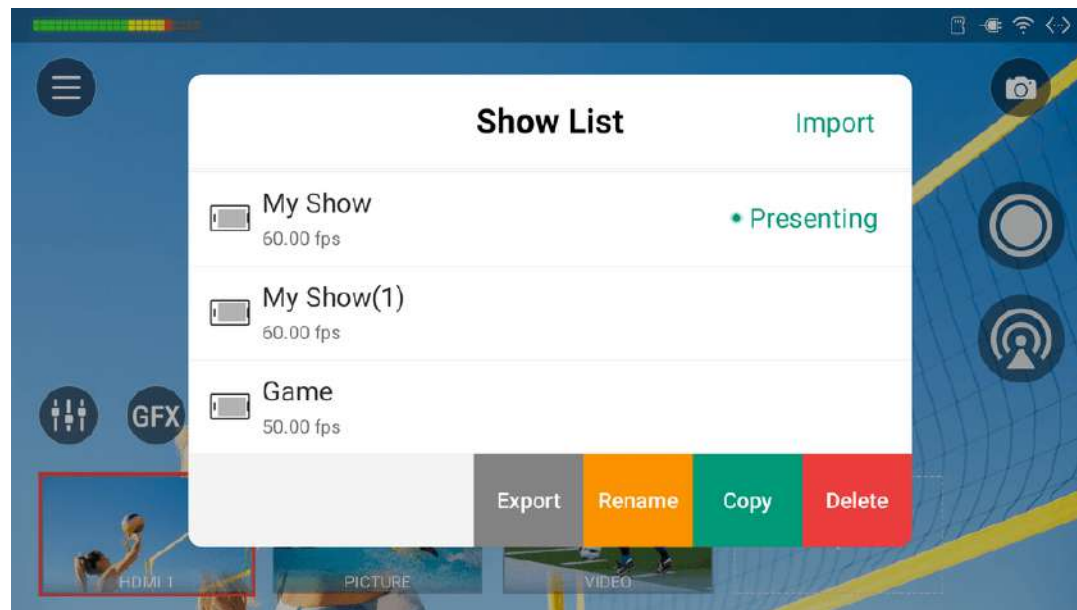


Show List

The show list displays the name and frame rate of each show, through which you can switch and manages shows.


Switch Show

1. Tap  > **Show list**.
2. Tap a show name to switch to the show.

Rename Show


1. Tap  > **Show list**.
2. Swipe a show to the left.
3. Tap **Rename**.
4. Enter a new name, and tap **Save**.

Copy Show

1. Tap  > **Show list**.
2. Swipe a show to the left.
3. Tap **Copy**.
4. Enter a new name, and tap **Copy**.

The new show you created inherits everything from the original show.


Delete Show

1. Tap  > **Show list**.
2. Swipe a show to the left.


3. Tap **Delete**, and confirm to delete on the popup.

💡 The current presenting show cannot be deleted.

Export Show


1. Tap  > **Show list**.
2. Swipe a show to the left.
3. Tap **Export**.
4. Select USB flash drive or SD card to export. The show is exported as a .zip file.

Import Show



1. Tap  > **Show list**.
2. Tap **Import** at the upper right corner.
3. Select a show file (.zip) from the storage.

Create and Manage Scenes

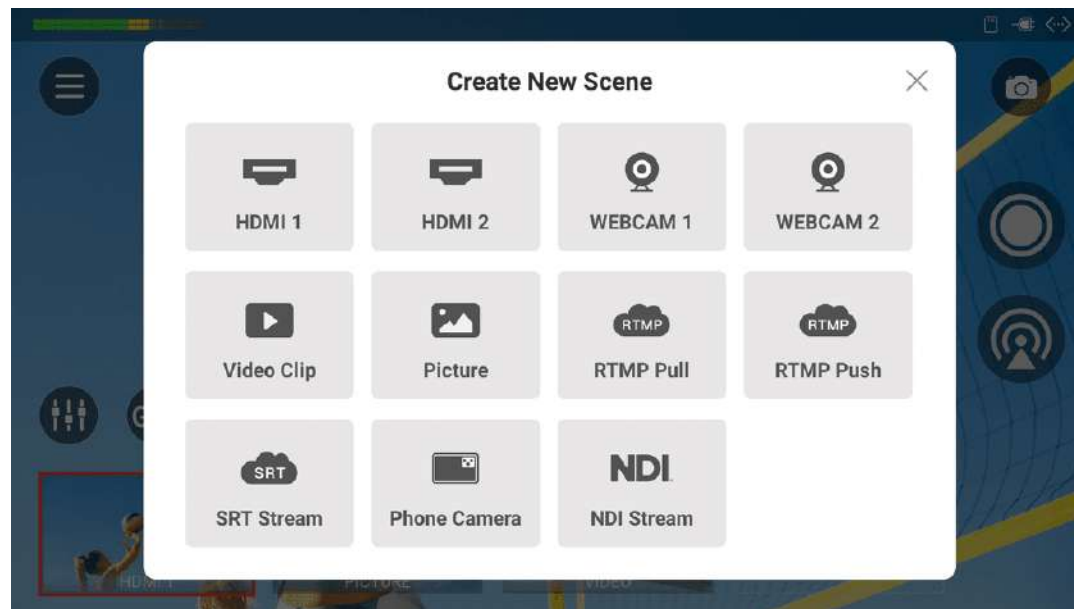A show consists of one or more scenes, while a scene contains various sources, including HDMI input signal, webcam input signal, phone camera input signal, video clips, pictures, [RTMP](#) streaming signal, [SRT](#) streaming signal, NDI[®] Input signal, etc.



Create Scene

1. Tap **+** on the main screen.
2. Select a source in the **Create New Scene** window to add, and then it enters the Scene Editor page. For details about how to add different sources, see [Add Source](#).
3. Edit the scene in the Scene Editor.
Many tools are available for you to edit your scene, such as position, size, crop, transition. For details, see [Edit Scenes](#).
4. Tap  in the Scene Editor to set audio. For details, see [Volume Control](#).
5. Tap  in the Scene Editor to add background music (BGM). For details, see [Background Music](#)
6. Tap **Save** at the upper right corner.
The scene thumbnail appears in the scene list.
7. Repeat the above steps to create more scenes.



Scenes


The scene list is displayed at the bottom of the main screen, and each scene has a corresponding thumbnail in the scene list.

The following information will be displayed on the thumbnail.

- A red box indicates which scene is in Program view.
- The scene name is displayed at the bottom.
- The layer type icon is displayed at the upper right corner: when there is only one layer in the scene, the type icon of the current layer is displayed; when there are multiple layers in the scene, an icon stack is displayed, and the icon at the front represents the uppermost layer.
- When the background music icon is displayed, it means that the scene has added background music.
- When the duration information is displayed, it means that the scene contains video. You can tap the play/pause button to control the video. Then, the progress bar of the video will appear on the top of the scene thumbnail.

With the scene list, you can browse, switch, view the scene, and even edit and manage the scenes.

- Swipe the scene list left and right to browse the scenes.
- Swipe the scene list to the far right, and tap **+** to create a scene.
- Tap a thumbnail in the scene list to switch scenes. It supports quick mode and manual mode, please refer to [Switch Scenes](#).
- Tap any blank area of the screen to view the full-screen mode, and then tap any area to exit the full-screen mode.

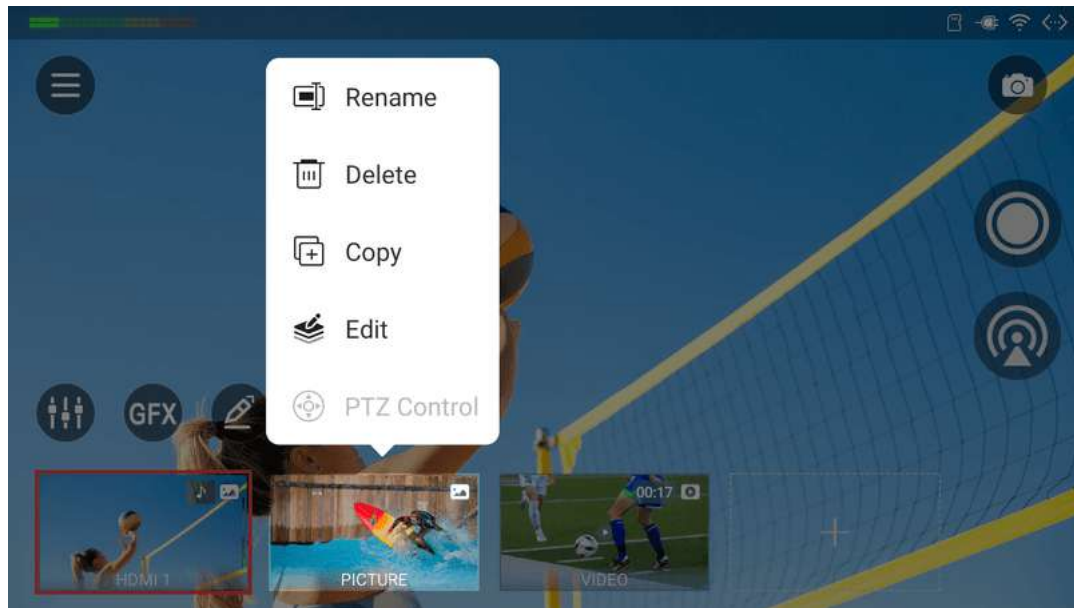

Rename Scene

1. Long press a scene thumbnail.
2. Tap **Rename** on the popup menu.
3. Enter new scene name, and tap **Save**.



Delete Scene

You can delete a scene through the following ways.

Method 1

1. Long press a scene thumbnail.
2. Tap **Delete** on the popup menu.
3. Confirm to delete on the popup.

Method 2

1. Tap  on the main screen.
2. Select **Rearrange/Size** on the popup menu.
3. Tap the  button on a thumbnail, and then tap **Delete**.
4. Tap **Done** at the upper right corner.

A scene that is in Program view cannot be deleted. Switch to a different scene and then you can delete the desired scene.



Copy Scene

You can also copy an existing scene to create a new scene by the following two ways.

Method 1:

1. Long press a scene thumbnail.
2. Tap **Copy** on the popup menu.
3. Enter new scene name, and tap **Copy**.

Method 2:

1. Tap  on the main screen.
2. Select **Rearrange/Size** on the popup menu.
3. Tap  on the thumbnail of the scene you want to copy.
The new scene will appear next to the copied scene, name as "The original scene name + (No.)", such as Video (1).
4. Tap **Done** at the upper right corner to go back to the main screen.

Edit Scene

1. Long press a scene thumbnail.
2. Tap **Edit** on the popup menu.
3. Edit the scene in the scene editor.



Zoom Scene List

1. Tap on the main screen.
2. Select **Rearrange/Size** on the popup menu.
3. Tap or button on the right to change the size of thumbnails. It supports three sizes: small, middle and large. By default, the Scene List uses middle thumbnails.
4. Tap **Done** at the upper right corner.




Rearrange Scene Order


1. Tap on the main screen.
2. Select **Rearrange/Size** on the popup menu.
3. Long press a thumbnail and then drag it to a desired position in the scene list.
4. Tap **Done** at the upper right corner.



Show or Hide the Scene List






- When the Scene List is visible, swipe down to the bottom of the screen to hide it.
- When the Scene List is hidden, tap  or swipe up from bottom to expand it.

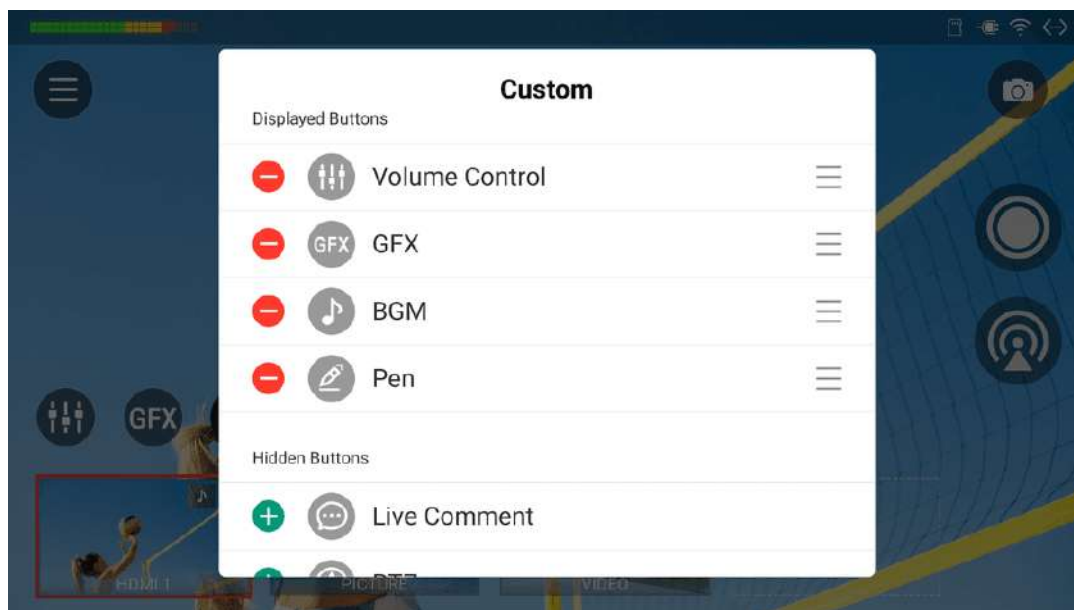You can show or hide the [GFX](#) list through the same way.



Customize Buttons

To focus on the task at hand, you may customize buttons appearing on the screen for each show.

1. Tap  on the main screen.
2. Tap **Custom**. Then it lists the displayed buttons and hidden buttons.
3. Tap  to add a button to the displayed buttons list. It supports displaying up to 6 buttons, including the  More button which is always displayed.
4. Press and hold , and drag up and down to change a button's display order.
5. To hide a button, tap  or swipe the button to left and then tap **Remove**.
6. Tap the blank space to exit.


Edit Scenes

Sources are the building blocks of scenes. You can fill a scene with a combination of various sources such as HDMI, WEBCAM, RTMP pull, RTMP push, SRT stream, NDI® stream, Video, Picture and Text. With the rich sources on hand, creativity is unlimited. You will use the Scene Editor to plan out your scene and add eye-catching effects to your sources.

The following picture illustrates the elements on the Scene Editor. This picture is in landscape mode, and some buttons will change positions in portrait mode.




Scene Editor

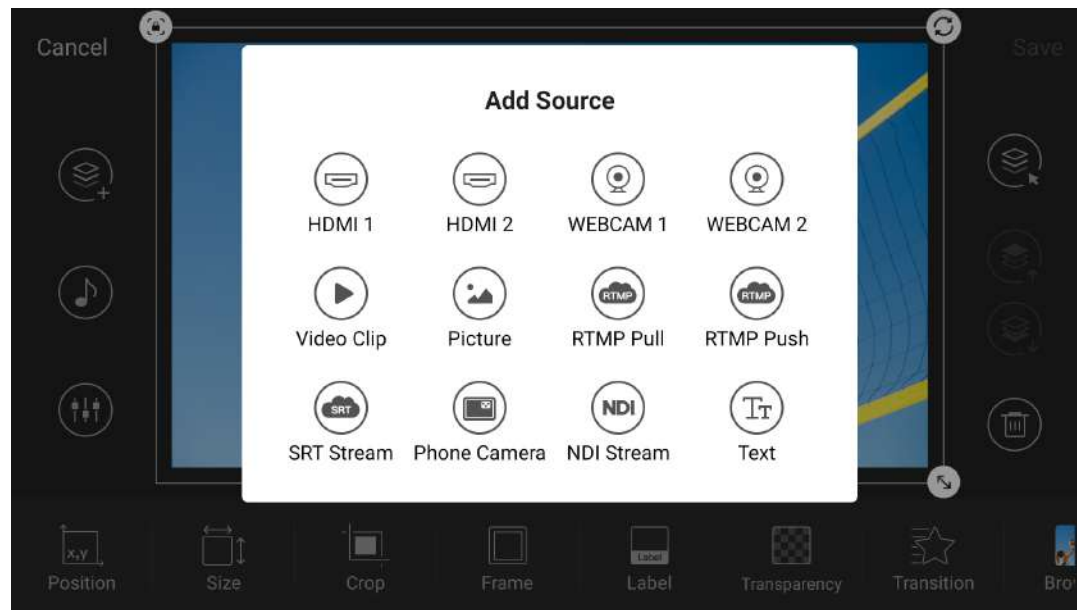

Add Source

You can add multiple sources in one scene, and then you can arrange the layout to look the way that you want.

1. Long press a scene thumbnail and then tap **Edit** to open the Scene Editor.
2. Tap  in the Scene Editor.
3. Tap a source in the **Add Source** window:

- **HDMI**

A high-quality external signal from a professional camera, computer, game console, etc. Up to 4K signal input is supported.

- **WEBCAM**

A high-quality external signal from a USB device, such as webcam. Up to 1080p60 signal input is supported. For details, refer to [Add WEBCAM](#).

- **Video Clip**

A video file selected from the internal storage, SD card or USB flash drive, which can be up to 4K, encoded in H.264, and in MOV, MP4, or MKV format.

To select files from the internal storage, you should import files to Director Mini device at first. Please refer to [How to import/export files](#).

- **Picture**

A picture file selected from the internal storage, SD card or USB flash drive, which can be JPG, PNG or BMP.

To select files from the internal storage, you should import files to Director Mini device at first. Please refer to [How to import/export files](#).

- **RTMP Pull**
A streaming source pulled via [RTMP](#) from a third-party server. Please refer to [Add RTMP Pull](#).
- **RTMP Push**
A streaming source pushed to Director Mini via [RTMP](#). Please refer to [Add RTMP Push](#).
- **SRT Stream**
A streaming source pulled via [SRT](#). Please refer to [Add SRT Stream](#).
- **Phone Camera**
A camera signal from the phone installed with the Director Utility App. You can [Add Phone Camera](#) at first, and then use your phone to connect the device.
- **NDI[®] Stream**
A streaming source pulled via [NDI[®] HX2](#), [NDI[®] HX3](#) or [Full NDI[®]](#). Please refer to [Add NDI Stream](#). It supports H.264 and H.265 codec.
- **Text**
Static annotations and crawling messages.
Tap the text frame to enter content, and tap Save to return to the Scene Editor.


A maximum of 1024 characters are supported. The more text, the smaller the font appears. The font size also changes automatically with the text box size.

- **Color**


A solid color source. It is white by default.

Notice:

- **In the same scene**, you can add a maximum of three sources, including HDMI, WEBCAM, RTMP/SRT/NDI Stream, Phone Camera and video clips, in which:
 - Each HDMI source and the WEBCAM can only be added once.
 - You can only add one video clip.
- **In the same show**, you can create up to 3 streams, including up to 3 NDI[®] streams.
- **In the same show**, you can create up to 3 Phone Cameras.

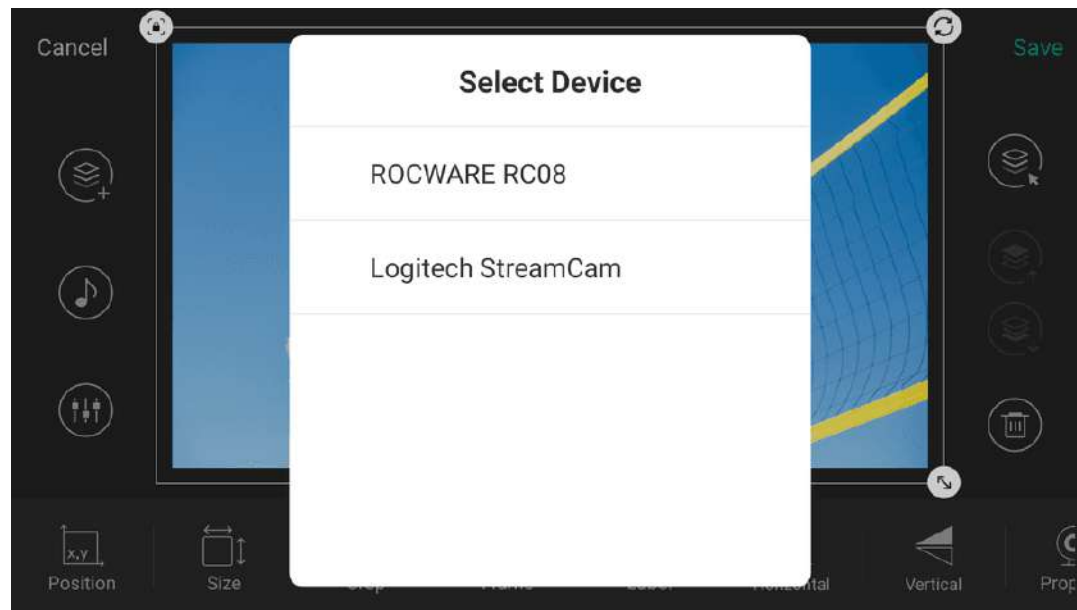


Add WEBCAM

1. Tap  in the scene editor.
2. Select **WEBCAM 1** or **WEBCAM 2**.
3. Bind a webcam device to WEBCAM 1 or WEBCAM 2 according to the following situations.
 - If one USB device is connected, choose **WEBCAM 1**, then the device will be bound with WEBCAM 1 automatically. When you add **WEBCAM 2**, no-signal screen will be displayed, vice versa.
 - If two or more USB devices are connected, when adding **WEBCAM 1** or **WEBCAM 2**, please select a device on the popup to bind.

You can refer to [Changing WEBCAM's Properties](#) to select or change the USB device bound to WEBCAM 1 or WEBCAM 2 as well set the WEBCAM's property.

The image shows two screenshots of the 'Create RTMP Pull' dialog. The left screenshot shows the basic form with fields for Name (RTMP), URL (rtmp:// 10.10.9.8/live), and Key (123). The right screenshot shows the 'Advanced' settings with fields for Buffer duration (60 ms), Authentication (toggled on), Username (Director), and Password (masked).


Add RTMP Pull

1. Tap  in the Scene Editor.
2. Tap **RTMP Pull**.
3. Enter the following information.
 - **Name:** Specify an alias name for your convenience of multi-item management.
 - **URL:** Enter the **RTMP** URL of the **RTMP** server. To add a video stream from a live platform, you can get the **RTMP** URL from the platform.
 - **Key:** Enter the key set on the **RTMP** server.
4. (Optional) Tap **Advanced** to set the following parameters.
 - **Buffer duration:** It ranges from 20ms to 8000ms, and the default value is 60ms. You can set a short duration when low latency matters.
 - **Authentication:** If the **RTMP** sender requires authentication, toggle on **Authentication** and enter **Username** and **Password** provided by the **RTMP** sender.
5. Tap **Create**.
6. To add more **RTMP** streams, repeat step 1 and 2, tap **Create Stream**, and operate as step 3 to 5 to finish creation.
7. After a stream is added, its information is recorded in the show. You can select an existing stream when you create a new scene or add a source to a scene.
8. To edit a stream, you can use the **URL** tool in the scene editor. For details, please refer to [URL](#).
9. To delete a stream, you can delete all the scenes containing this stream, or

delete the stream source in all the relative scenes.

Add RTMP Push

As is to send RTMP streams to Director Mini, the IP address of Director Mini is the destination.

1. Tap  in the Scene Editor.
2. Tap **RTMP Push**.
3. Enter the following information.
 - **Name:** Specify an alias name for your convenience of multi-item management.
 - **Key:** Specify a stream key.
 - **Buffer duration:** It ranges from 20ms to 8000ms, and the default value is 60ms. You can set a short duration when low latency matters.

A stream address is automatically generated at the bottom of the window, including an Ethernet address and/or a wireless network address. The sender should use this address as the destination address.

4. Tap **Create**.
5. To add more RTMP streams, repeat step 1 and 2, tap **Create Stream**, and operate as step 3 to 4 to finish creation.
6. After a stream is added, its information is recorded in the show. You can select an existing RTMP stream when you create a new scene or add a

Create SRT Stream

Name:

Address:

Port:

Stream ID:

Advanced

Cancel **Create**

Create SRT Stream

Stream ID:

Advanced

Latency: ms

Buffer duration: ms


Encrypted:

Cancel **Create**

source to a scene.


7. To edit the stream, you can use the **URL** tool in the scene editor. For details, please refer to [URL](#).
8. To delete a stream, you can delete all the scenes containing this stream, or delete the stream source in all the relative scenes.

Add SRT Stream

1. Tap  in the Scene Editor.
2. Tap **SRT Stream**.
3. Enter the following information.
 - **Name:** Specify an alias name for your convenience of multi-item management.
 - **Address:** Enter the IP address of domain name of the **SRT** sender.
 - **Port:** Enter the port of the sender. It ranges from 1 to 65535.
 - **Stream ID:** Enter the stream ID of the sender, which can contain 0 to 256 characters. You can leave it empty if the sender has no stream ID.
4. (Optional) Tap **Advanced** to set the following parameters.
 - **Latency:** Enter a number between 20 to 8000. The default value is 120. It is recommended that the latency is configured the same as that of the sender.
 - **Buffer duration:** The value ranges from 20ms to 8000ms. The default value is 60ms. You can set a short duration when low latency matters.
 - **Encrypted:** If the stream from the sender is encrypted, toggle on


Encrypted, select the encryption mode, which can be [AES 128](#), [AES 192](#) or [AES 256](#), and then enter the **Passphrase**.

5. Tap **Create**.
6. To add more [SRT](#) streams, repeat step 1 and 2, tap **Create Stream**, and operate as step 3 to 5 to finish creation.
7. After a stream is added, its information is recorded in the show. You can select an existing stream when you create a new scene or add a source to a scene.
8. To edit a stream, you can use the **URL** tool in the scene editor. For details, please refer to [URL](#).
9. To delete a stream, you can delete all the scenes containing this stream, or delete the stream source in all the relative scenes.

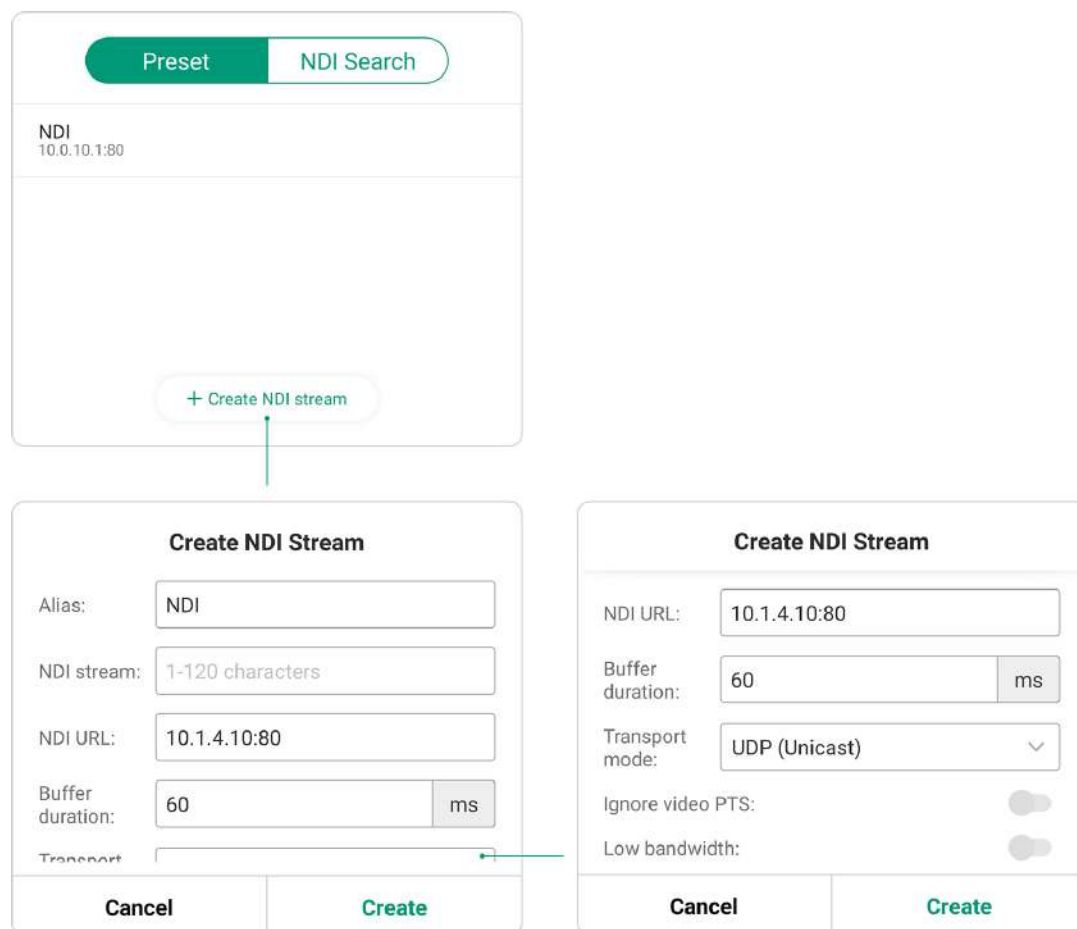

Add NDI Stream

Add NDI Stream Manually

1. Tap  in the Scene Editor.
2. Tap **NDI Stream**.
3. Tap the **Preset** tab, and then tap **Create NDI stream..**
4. Enter the following information.
 - **Alias:** Specify an alias name for your convenience of multi-item management.
 - **NDI stream:** Enter the stream name of NDI source, which is case-insensitive.
 - **NDI URL:** Enter the stream address of NDI source formed like "ip address:port". For example, if you want to add a source named PRO CONVERT (#00 (A409200420003)) 192.168.1.1:5961, fill in the parameter with 192.168.1.1:5961.


Either a name or a URL is required when adding a new NDI source. Ensure that the two properties are those of the same unit when you are filling in them both.


- **Buffer duration:** The value ranges from 20ms to 8000ms. The default value is 60ms. You can set a short duration when low latency matters.
- **Transport mode:** Options include UDP (Unicast), UDP (Multicast), RUDP (Unicast), TCP (Uni-connection) and TCP (Multi-connection).
- **Ignore video PTS:** For some video streams with wrong timestamps, toggle on this function to ensure smooth video output.

- **Low bandwidth:** It is recommended to enable this function when the connected network speed is too low to output smooth video. When toggled on, the video stream drops to medium quality and uses significantly less bandwidth.
5. Tap **Create** to add the stream to the scene.
 6. Repeat the steps above to create more NDI streams.
When multiple NDI streams are created, you can select one to add to a scene.
 7. To edit an existing NDI stream, swipe the stream to the left, and tap **Edit**.
 8. To delete an existing NDI stream, swipe the stream to the left, and tap **Delete**.
If a NDI stream is in one or more scenes, it cannot be deleted. Please delete the source in relative scenes at first, and then delete it.




Search NDI Stream Automatically

1. Tap  in the Scene Editor.
2. Tap **NDI Stream**.
3. Tap **NDI Search**, and it starts searching NDI sources in the same LAN. By default, it searches NDI sources of the public group.
4. Tap **Advanced**, enter **Group name**, and tap **Confirm**. Then it starts searching sources in corresponding group(s).
Group name is case-insensitive, and should contain A to Z, a to z, 0 to 9 and special characters like `_`. The group name entry can contain comma-separated values, allowing the device search all the groups listed here.
5. If you toggle on **Discovery server**, it can auto-detect a source sender in different network segment but be able to ping. And the Server IP should be the IP address of the server running discovery server software.
6. Select a detected NDI source in the list to add to the scene. And it is added to the **Preset** list at the same time.
7. Tap **Refresh** to refresh the NDI source list if needed, for example, when the network of Director Mini changes.

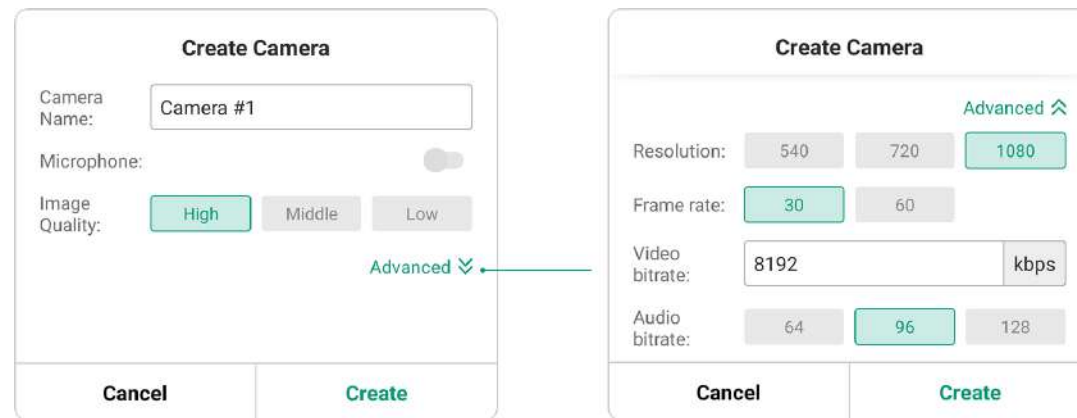


Add Phone Camera

To use the image from your phone's camera as a source, you have to create Phone Camera on the device at first.

1. Tap  in the Scene Editor, and then select **Phone Camera**.
2. Enter the camera name (1 - 32 bytes).
3. Toggle on Microphone, so that the Director Mini device can capture audio from your phone's microphone.
4. Select the image quality: High, Middle, Low.
5. (Optional) Tap **Advanced** to set relative properties.
 - Resolution: 540, 720, 1080
 - Frame rate: Options change along with the frame rate of the show, which can be 60/59.94/50/30/29.97/25/24/23.98/15 fps. For the details, please refer to [Mapping between the show's frame rate and each output frame rate](#)
 - Video bitrate: enter your preferred value.
 - Audio bitrate: 64, 96, 128
6. Tap **Create**.
7. To create more cameras, repeat step 1, and then tap **Create camera** in the **Select Phone Camera** window to add a new camera.

You can create up to three cameras in a show.


After you have created Phone Cameras on the device, you can use your phone installed with the Director Utility App to connect to the device and control the camera. Please refer to the [Director Utility App User Manual](#).

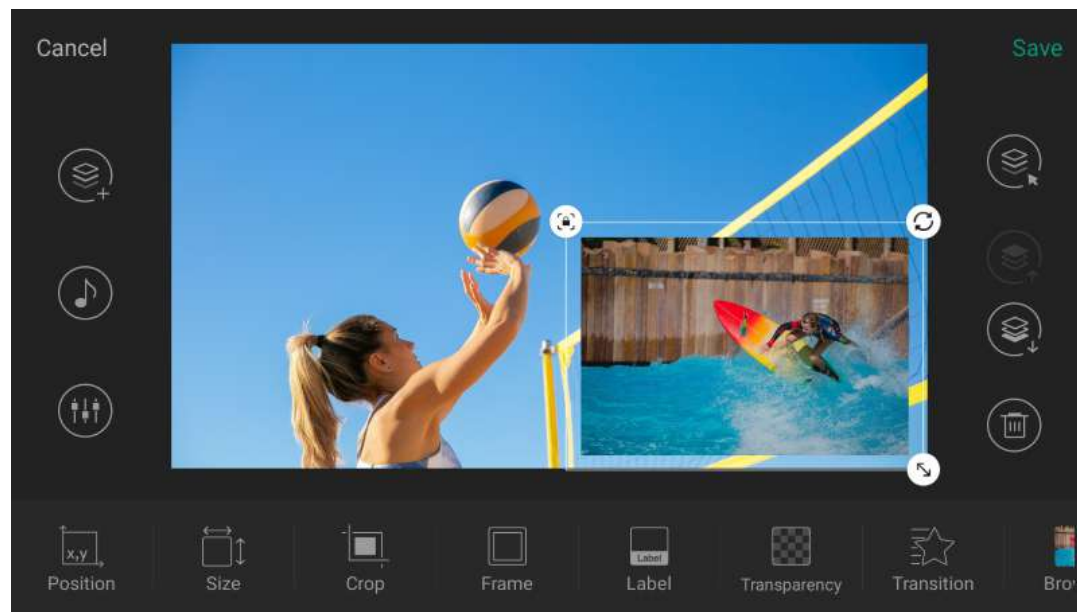

Select Source

You can tap a source to select it, and the selected source will have a white frame surrounded.



If multiple sources overlap with each other, and you can select the covered layer by the following way.

1. Tap .
2. Select the source you want to edit in the pop-up window.


For layers completely covered by a larger layer, you cannot move their position by dragging.

Change Z-Order

Z-order is an ordering of overlapping sources. You can change the z-order to have a source appearing in front of other sources.

1. In the Scene Editor, select a source.
2. Tap  to move the selected source to an upper layer.
3. Or tap  to move the selected source to a lower layer.

Delete a Source

1. In the Scene Editor, select a source.
2. Tap  to delete the selected source.

Editing Tools

When a source is selected, editing tools for that source appear in the bottom toolbar. The table below lists all the editing tools for each type of source.

Tool	HDMI	WEBCAM	Phone Camera	SRT/RTMP Stream	NDI Stream	Video Clip	Picture	Text	Color
Move, Resize & Rotate	★	★	★	★	★	★	★	★	★
Position	★	★	★	★	★	★	★	★	★
Size	★	★	★	★	★	★	★	★	★
Frame	★	★	★	★	★	★	★	★	★
Crop	★	★	★	★	★	★	★	-	-
Label	★	★	★	★	★	★	★	-	-
Transition	★	★	★	★	★	★	★	★	★
Format	★	★	★	★	★	★	★	★	★
Text	-	-	-	-	-	-	-	★	-
Background	-	-	-	-	-	-	-	★	-
Flip	★	★	-	-	-	-	-	-	-
ChromaKey	★	★	★	★	★	★	-	-	-
Play Range	-	-	-	-	-	★	-	-	-
Action	-	-	-	-	-	★	-	-	-
Property	-	★	★	-	-	-	-	-	-
URL	-	-	-	★	★	-	-	-	-
Browse	-	-	-	-	-	★	★	-	-
Color	-	-	-	-	-	-	-	-	★
Transparency	-	-	-	-	-	-	★	-	★
PTZ Control	★	★	-	★	★	-	-	-	-



Move, Resize & Rotate

All kinds of sources can be moved, resized and rotated.



To move a source:

Drag and move the selected source to a new position.



When dragging a source around, guidelines will appear for you to align the source with other sources and the Scene Editor.

To control the position more precisely, see [Position](#).

To resize a source:

1. (Optional) Tap  or  on the selected source's frame to unlock/lock the aspect ratio of the selected source.

This operation is not available for a Text source.

2. Drag  (for locked aspect ratio) or  (for unlocked aspect ratio) on the source's frame to scale it up and down.

After you tap  to unlock the aspect ratio and drag  to freely resize a source, you can tap  to restore to the original aspect ratio.

When resizing a source, smart guides will appear for you to scale the source in reference to other sources and the Scene Editor.

To control the size more precisely, see [Size](#).

Cancel Save

X Coordinate Width

Y Coordinate Height

Angle Deg

1	2	3	-
4	5	6	⌋
7	8	9	⌋ⓧ
,	0	.	←

To rotate a source:

Press and rotate  on the selected source's frame.

To control the rotation more precisely:

1. Tap **Position** or **Size** at the bottom bar.
2. Tap the X or Y number (on the **Position** control), or the W or H number (on the **Size** control).
3. On the page displayed, set **Angle**.
4. Tap **Save**.




Position

Apart from dragging and moving a source to change position, you can also tap **Position** to set position more precisely.

- **X, Y:** Tap the number to specify the X and Y coordinates of the source's center. Or tap or long-press an arrow button to move the source horizontally/vertically.
- **Auto:** Automatically move a source to a specified position. Nine positions are available, as shown in the image on the left.




Size


Apart from dragging  on a source's frame to scale it up and down, you can also use the **Size** control to set size more precisely.

- **W, H:** Tap the W or H number to specify the width and height in pixels of the source. Or tap +/- to scale up/down the source.

The value ranges for W and H are as follows:

When the aspect ratio is locked (indicated by the  icon on the source frame):

- W: 0 to 1280 or 1920 pixels, depending on the resolution of your show
- H: 0 to 720 or 1080 pixels, depending on the resolution of your show
- When the value of W changes, the value of H changes accordingly, or vice versa.


When the aspect ratio is unlocked (indicated by the  icon on the source frame):

- W: 0 to 1280 or 1920 pixels, depending on the resolution of your show
- H: 0 to 1280 or 1920 pixels, depending on the resolution of your show


- **Full Screen:** Tap this button to expand the source to full screen.

- When you lock the aspect ratio, a source is expanded to full screen when either its width or height reaches that of the canvas.
- When you do not lock the aspect ratio, a source is stretched to fill the whole canvas, in which case the source can be distorted.


- **More:** You can tap or long-press one of the buttons to scale up/down the source towards the corresponding direction. Tapping changes the size by one pixel while long-pressing changes the size continuously.

-  : Scales up a source to a specified direction, as indicated by the arrow in the icon.

The buttons are unavailable when your source is already at the largest size.

-  : Scales down a source to a specified direction, as indicated by the arrow in the icon.

The buttons are unavailable when your source is already at the smallest size.

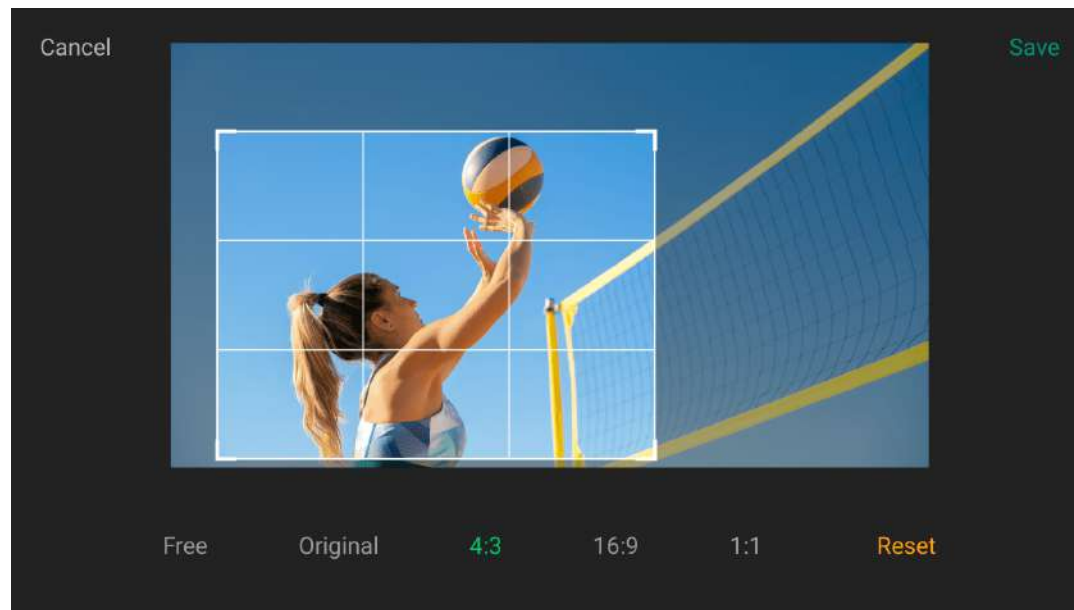


Crop

Cropping allows only part of the source to be rendered in the scene. All sources except text and color can be cropped.

1. Tap **Crop** in the toolbar.
2. Select a cropping ratio.
3. Drag the corner handles to specify the crop boundaries.


Tap **Reset** to revert to the original size and aspect ratio of the source.


4. Tap **Save** to save changes and go back to Scene Editor.

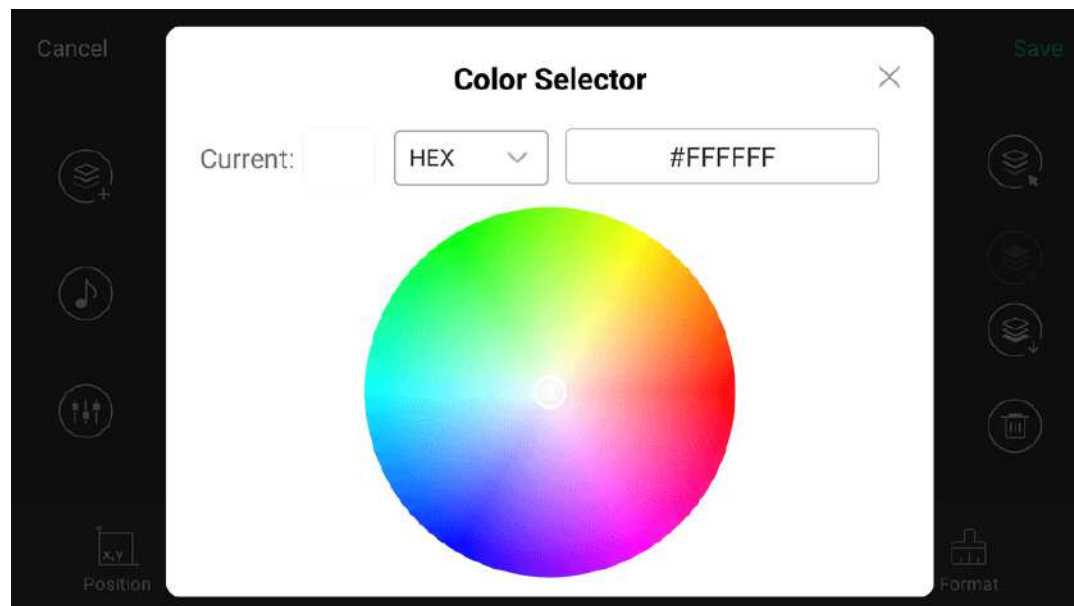

Color

This function works with the color source. It is also a sub-function of other tools, such as text and background.

1. Tap **Color**.
2. Swipe the color bar to the left or right to choose a color.
3. If the color provided by the system cannot meet the needs, swipe the color bar to the far right, tap  to open the color selector.
 - Tap to select a color in the color wheel.
 - Or select a color model which can be HEX, RGB or HSL, and the code or value.

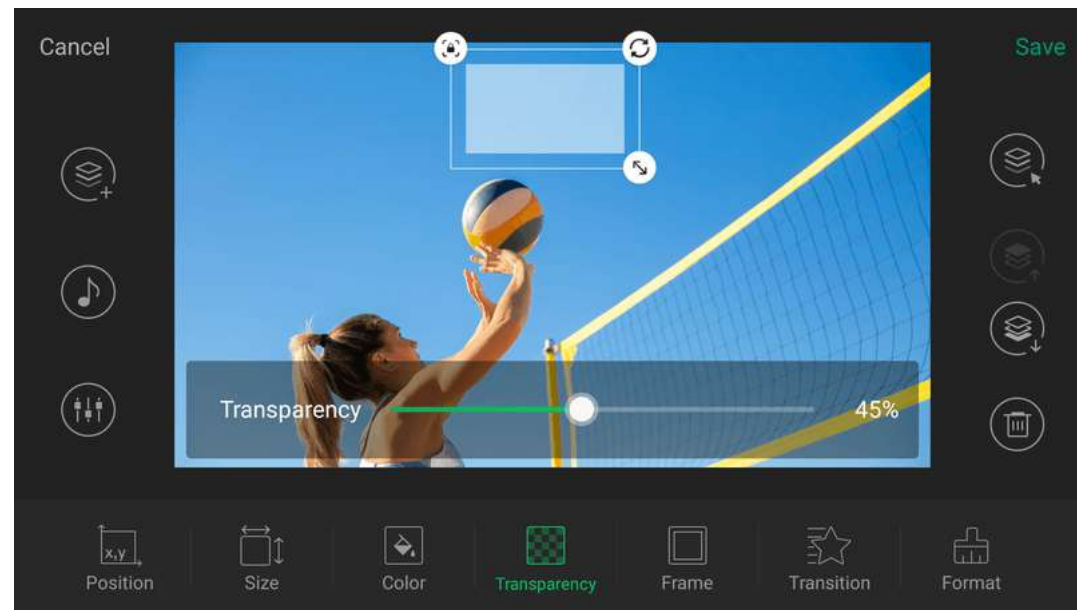

Transparency

This feature works with the color and picture source. It is also a sub-function of other tools, such as text and background.

Tap **Transparency** and move the slider to adjust the transparency. It ranges from 0 (solid) to 100 (completely invisible).



Frame

You can decorate a source with a **Frame**.

A frame is defined by the following properties:

- **Weight:** Sets the frame's border weight. It ranges from 0 to 50 pixels, with 0 indicating no frame.
- **Color:** Sets the frame's color, with white as the default.
- **Corners:** Sets the frame's corner radius, which can range from 0 to 100. When the **Round** value is zero, all corners are squared; otherwise, all corners are rounded accordingly.
- **Position:** Sets the frame's position to be inside or outside the source. It is inside the source by default, which means that the frame overlaps the source.
- **Reset:** Erases the frame.

💡 When you tap **Frame**, a basic white frame is instantly added on the source.




Label

When you tap **Label**, the source is instantly labeled by its type name or file name. You can change the text and its properties to make a special mark. This tool is available for all sources except text and color.

1. Tap the text area and then change the text.

A maximum of 1024 characters are supported in total. The more text that is input, the smaller the font will appear. The font size also changes automatically with the label size.

2. Set properties of label.
 - **Theme:** Sets the label's theme color, with white as the default. If the theme provided by the system cannot meet your needs, swipe the theme bar to the far right, tap **Custom**, and then tap **Text** and **Background** to set the color of text and background.
 - **Dock:** Sets the label's direction (bottom, top, left or right).
 - **Position:** Sets the label's position (inside or outside the source). The default position is inside the source, which means that the label and source are overlapped.
 - **Size:** Sets the label's height, ranging from 0 to 45, which indicates the proportion of the label height to the source height. The default value is 30.
 - **Font:** Sets the label text's font.
 - **Alignment:** Sets the alignment (left, center or right) of the label text.
 - **Reset:** Removes the label.

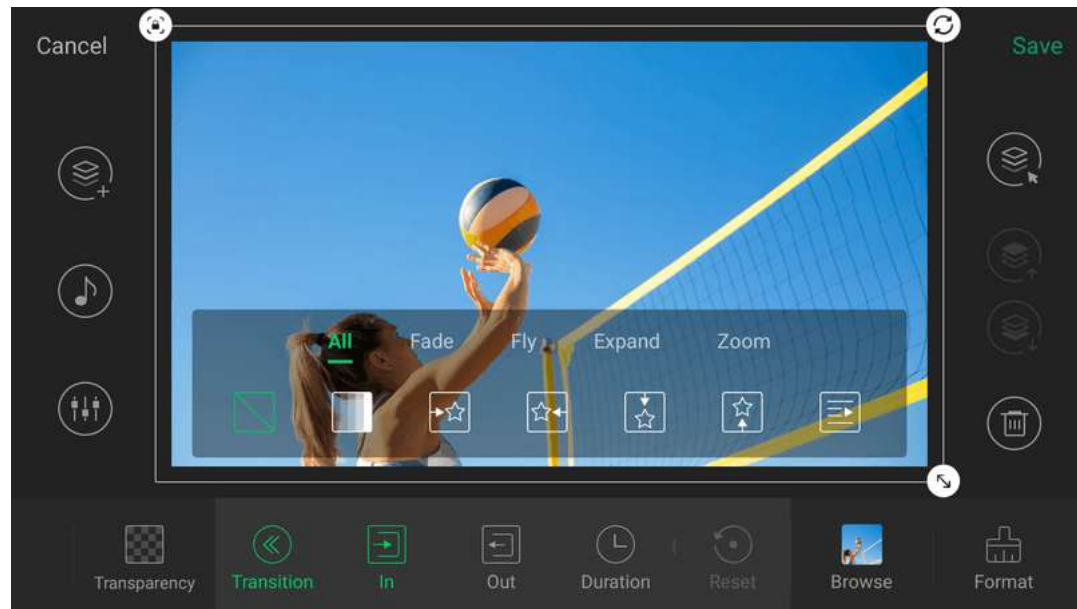

Transition

Tap **Transition** to add dynamic effects to your sources.

This tool is available for all sources.

Add entrance transition:

Tap **In** and select an entrance effect from the **All** tab or any other category tab.



None: No entrance transition (default).




Fade: Fade in.





Fly: Fly in from 4 directions, as indicated by the arrows.




Expand: Expand in from 6 directions, as indicated by the arrows.



Zoom: Zoom in from 9 directions, as indicated by the arrows.

After you select an entrance transition for the first time, Director Mini automatically sets the corresponding exit transition for you. For example, when you set the entrance transition as , the exit transition is set to . You can change the exit transition effect.

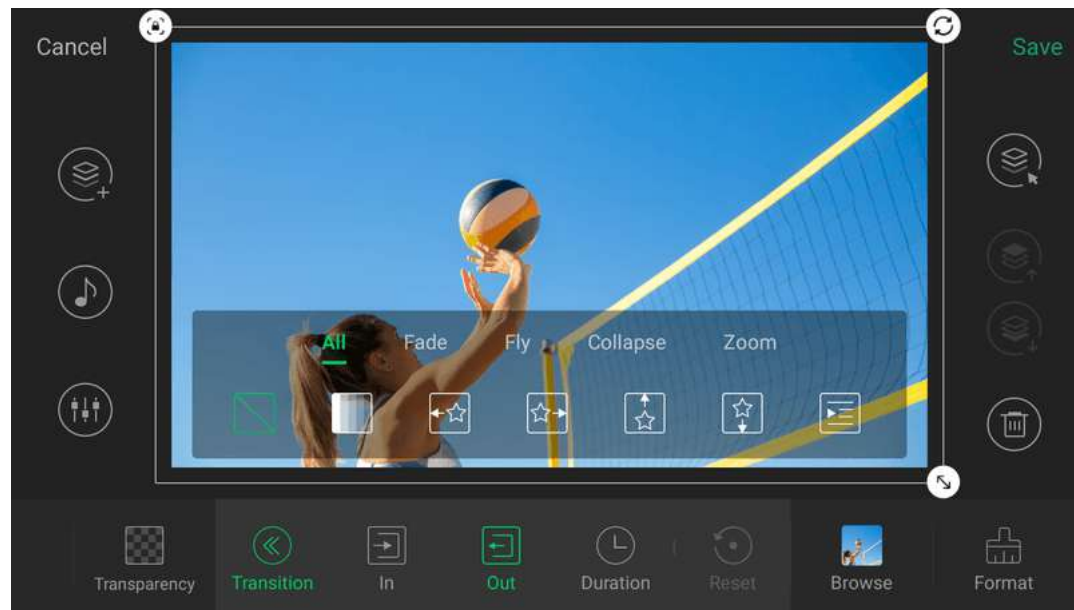

Add exit transition:

Tap **Out** and select an exit effect from the **All** tab or any other category tab.



None: No exit transition (default)



Fade: Fade out.



Fly: Fly out to 4 directions, as indicated by the arrows.



Collapse: Collapse out to 6 directions, as indicated by the arrows.



Zoom: Zoom out to 9 directions, as indicated by the arrows.

After you manually change the exit transition, the entrance transition will not change accordingly. The exit transition will not change along with the entrance transition thereafter.

Change transition speed:

Tap **Duration** and move the slider.

It applies to both the entrance transition and exit transition. A longer duration means a slower transition.

Erase transition:

Tap **Reset** to erase transition effects.

You can check the transition effect on second screen, recording video or streaming target.



Text

This tool applies to the Text source.

Tap **Text** at the toolbar to define the following properties:

- **Color:** Sets text color.
- **Font:** Sets text font.
- **Case:** Sets text to all uppercase or lowercase.
- **Alignment:** Sets text alignment (left, center or right).
- **Transparency:** Sets text transparency.
- **Shadow:** Applies a shadow to the text. 0 indicates no shadow.
- **Crawl:** Makes the text crawling on the screen by specifying the crawling speed and direction. Speed 0 means no crawling.
- **Reset:** Reverts to the original properties.



Background

This function applies to the Text source.

Tap **Background** to define the following properties:



- **Color:** Specifies a solid color as the text background.
- **Gradient:** Specifies a gradient color as the text background.
- **Picture:** Specifies a picture as the text background. The picture format can be JPG or PNG.
- **Transparency:** Sets the transparency of text background.
- **Reset:** Clears the background.


Color, Gradient and Picture are mutually exclusive. Applying one will overwrite the other.



Flip



This tool applies to HDMI and webcam sources.

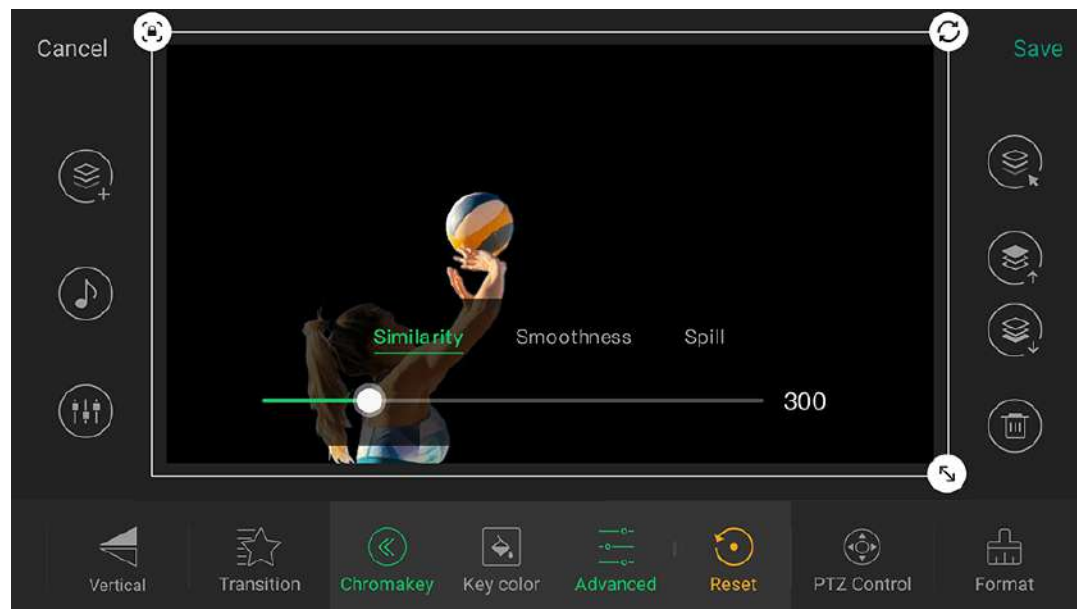- Tap  **Horizontal** to flip the source from left to right.
- Tap  **Vertical** to flip the source from top to bottom.




Chromakey

Chromakey can remove the background of HDMI, WEBCAM, [SRT/RTMP](#) stream, NDI® stream, Phone Camera and Video sources.

1. Tap **Chromakey**, and the system implements keying with an auto algorithm.
2. Tap **Key color**, and select a color to key.
3. If you want to key other color, tap  to open the color setting page, tap on the preview image to select a color, or enter RGB value at the bottom, and then tap **Save**.
4. With  selected, you can tap **Advanced** to adjust Similarity, Smoothness and Spill.
5. To cancel keying, tap **Reset**.

To get a good effect, you can build the background as follows.

- Use a bright green or blue screen. The contrast in colors makes it easier to distinguish you in the foreground from the bright background. Professional physical green screens are recommended.
- Make sure the background is flat without any wrinkles or seams, avoiding shadows and uneven lighting.
- Use higher quality cameras.
- Ensure that your background color does not match your shirt, hair, or eye color.
- Adjust your distance from background to avoid color spill.
- Use uniform lighting to make the background receive light evenly, and avoid your shadow falling on the background. It is recommended to use a 3-point lighting setup.

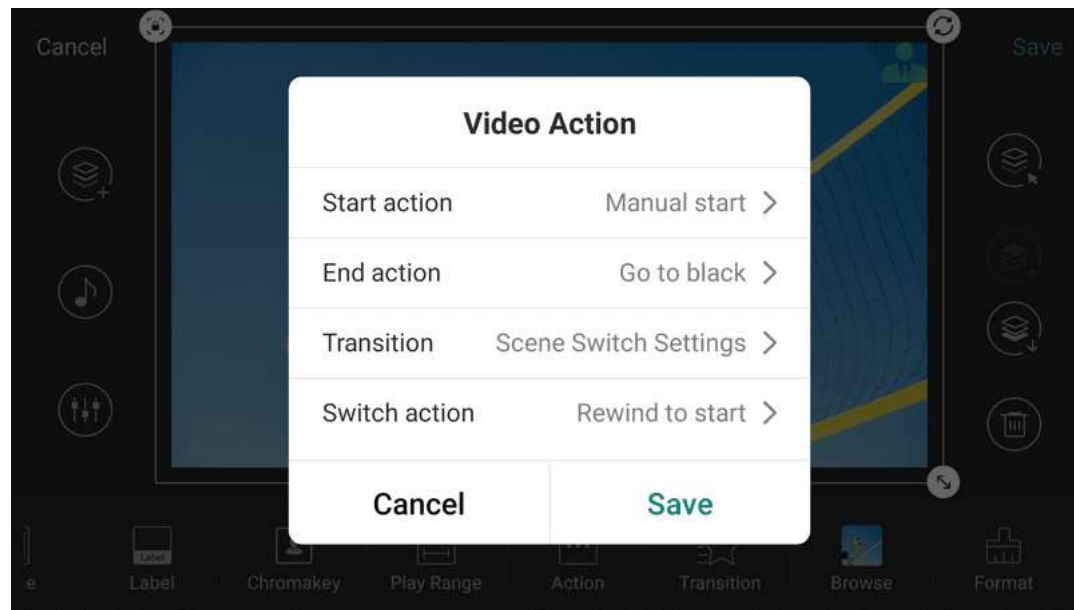

Action

This function applies to the Video Clip source.


Action define how a video source is played.

- **Start action:** Defines how video playback is started.
 - **Auto start:** Starts to play the video automatically.
 - **Manual start:** Starts to play or pause the video by tapping the Play/Pause button on the scene thumbnail.

- **End action:** Defines the action to take when the video playback is over.
 - **Go to black:** Video area turns black.
 - **Repeat video:** Plays the video repeatedly.
 - **Show last frame:** Stops the video and displays the last frame.
 - **Show first frame:** Stops the video and displays the first frame.
 - **Hide video:** Hides the video, which makes the video disappear from the screen.
 - **Switch to scene xx:** Switches to scene xx automatically. When the video is playing back, the scene to switch to will be highlighted with a flashing yellow frame, a LIVE SOON mark and a countdown clock during the last 10s of the current video.

- **Transition:** Defines the transition effect of the video when it is set to switch to scene xx.
 - **Always Cut:** an instant cut always applies when the video is switched out automatically.
 - **Always Fade:** a fade effect always applies when the video is switched out automatically.

- **Scene Switch Settings:** follow the scene switch settings when the video is switched out automatically.
- **Switch action:** Defines how the video is continued if the scene is switched out to another scene and then back before the video playback ends.
 - **Rewind to start:** Replays the video from the beginning.
 - **Pause video:** Pauses the video when the scene is switched out, and resumes when the scene is switched back.

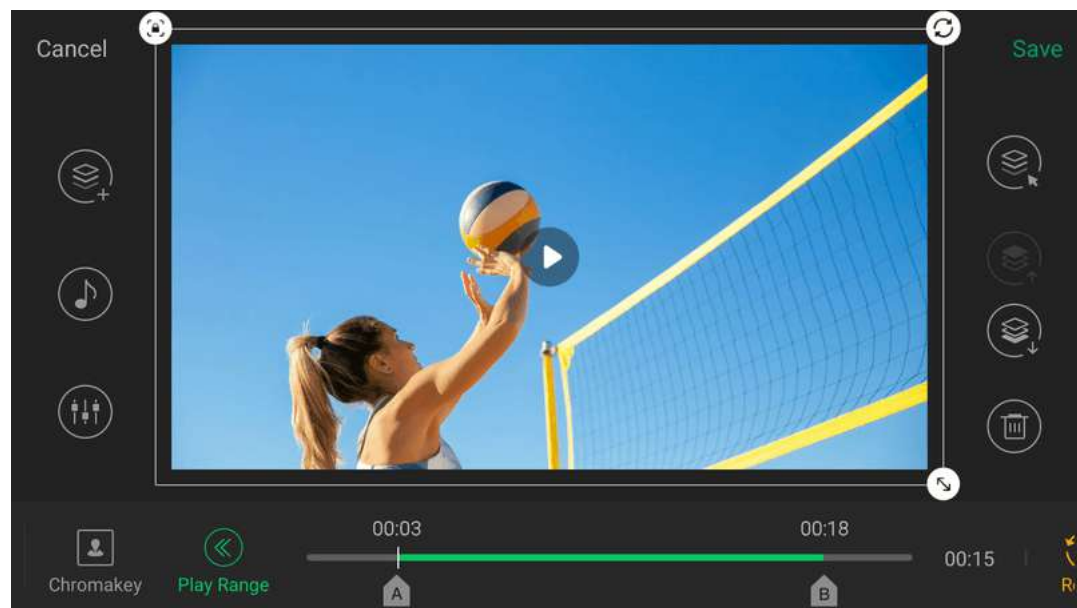

Play Range

This function applies to the Video Clip source.

An entire video will be played by default, but you can specify a start and end point if you wish to only play part of a video.


As shown in the figure on the left, you can drag and move **A** and **B** tags on the video's progress bar to define start and end points.

Browse

This function applies to the Video Clip and Picture sources.

Tap **Browse** to open the storage, where you can select an image or a video clip to replace the current image or video.


The replacement will not change the configured properties of the Video or Picture source except its size and position.

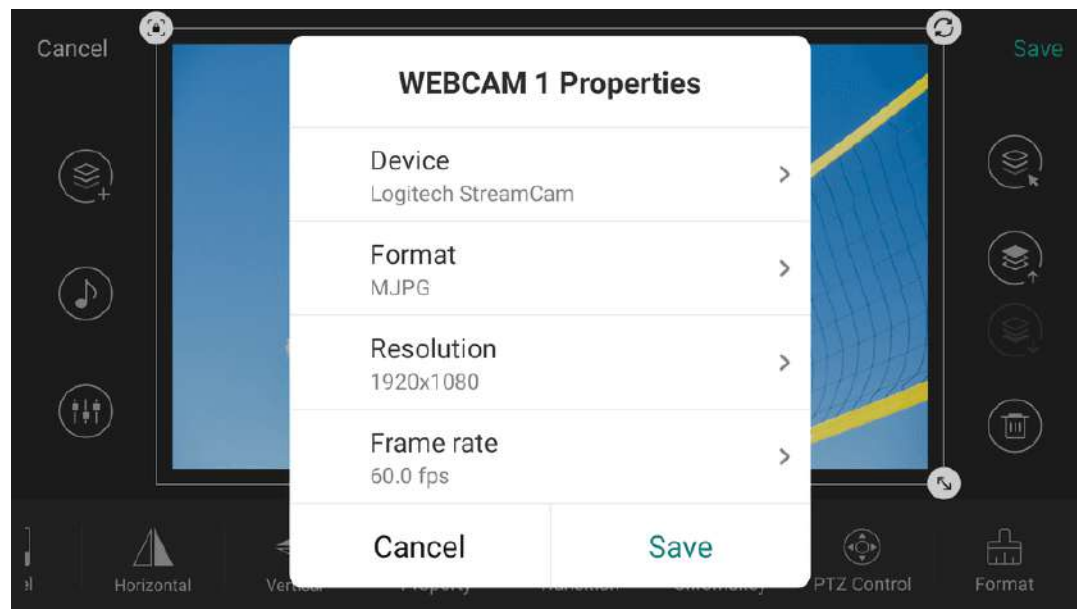


Property

This tool applies to the WEBCAM and Phone Camera.

Change WEBCAM's Properties


1. Ensure that a WEBCAM is connected to the device.
2. Select the WEBCAM source.
3. Tap  to open the WEBCAM Properties window.
4. View and select properties of the WEBCAM.
 - **Device:** the information of current WEBCAM. Tap **Device**, and it lists all the connected WEBCAM devices. You can select one to switch. If one device is bound with the other WEBCAM, you need to confirm the selection after you tap Save.
 - **Format:** the current format. Tap **Format**, and it lists all the available format options. You can select one to switch.
Supported formats: YUYV, MJPG, NV12
 - **Resolution:** the current resolution. Tap **Resolution**, and it lists all the available resolution options. You can select one to switch.
Supported resolution: up to 1920x1080
 - **Frame rate:** the current frame rate. Tap **Frame rate**, and it lists all the available frame rate options and uses the frame rate matching the show by default. You can select one to switch.
Supported frame rate: up to 60fps


The changeable properties and parameters of different WEBCAM devices may differ.

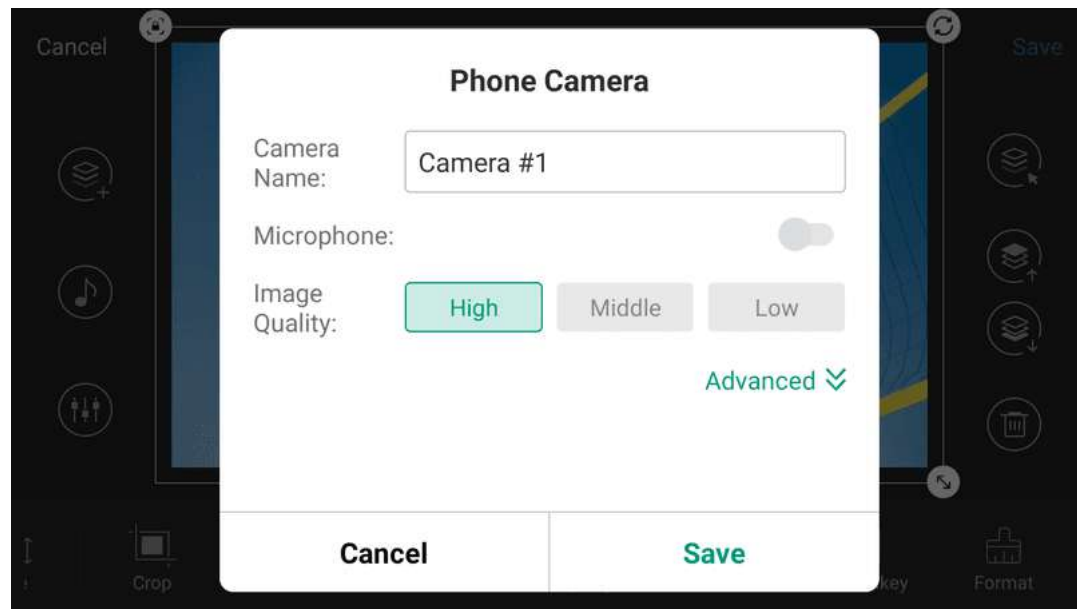

5. Tap **Save** after you change properties.


Change Phone Camera's Properties



1. Select a Phone Camera source.
2. Tap  to open the Phone Camera window.
3. Change properties as needed. For details, please refer to [Create Phone Camera](#).
4. Tap **Save** after you change properties.

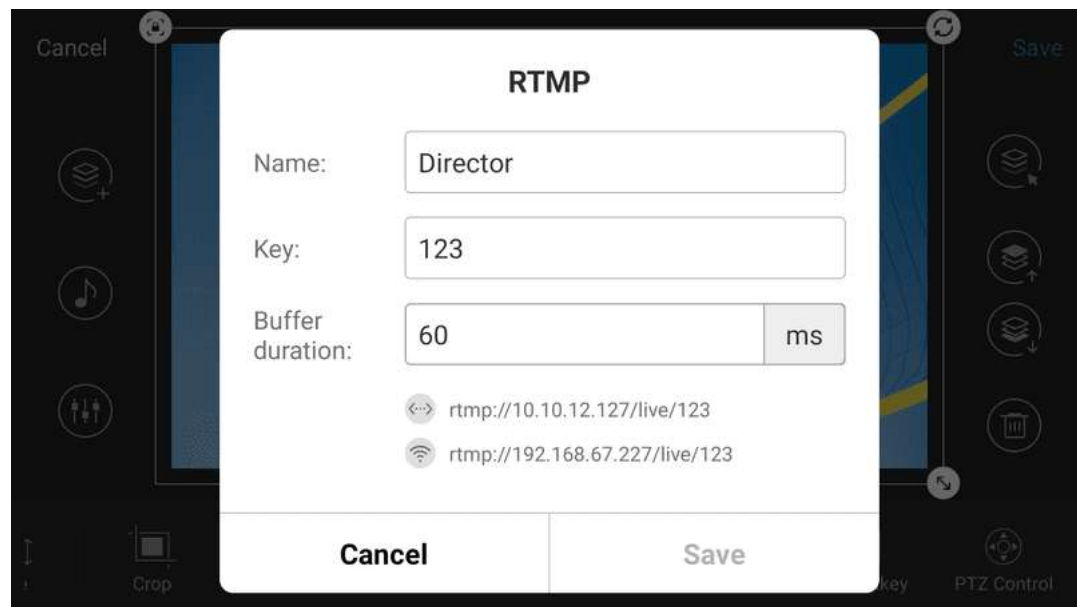

URL

This tool applies to the [SRT/RTMP](#) stream and NDI[®] stream.



1. Tap  **URL** to open the stream's property window.
2. Change properties as needed. For details please refer to [Add RTMP Stream](#), [Add SRT Stream](#) and [Add NDI Stream](#).
3. Tap **Save**.

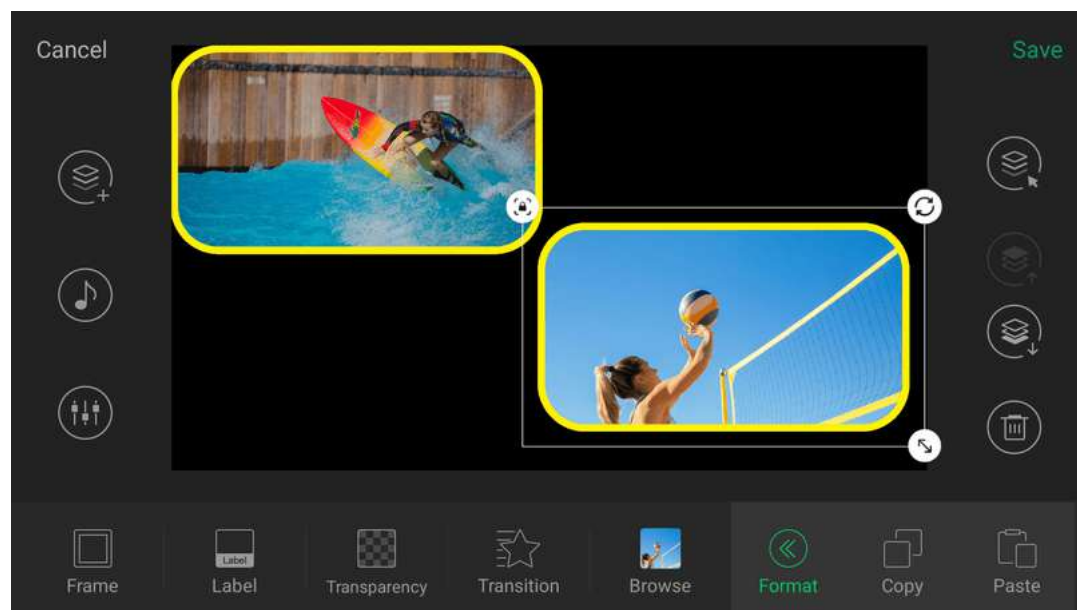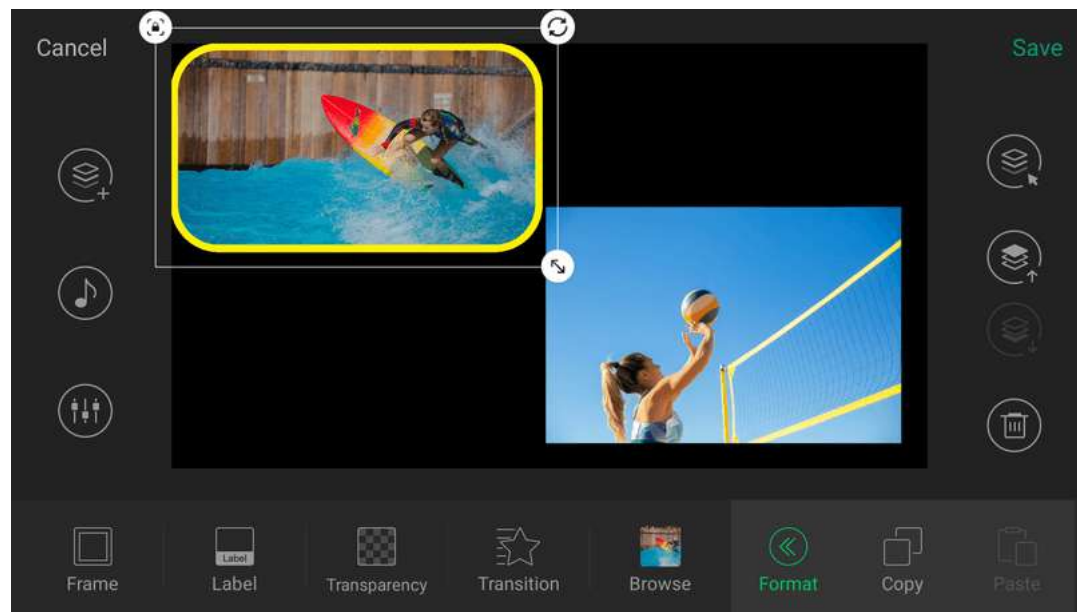

Format

This function can copy the format of one source and past to another source. This tool is available for all sources. The format function of text source takes effect independently, that is, the format of a text source can only be pasted to another text source.

1. Select a source, tap **Format**, and then tap **Copy**. The format of current source is copied.
2. Select another source, tap **Format**, and then tap **Paste**. The copies format is pasted to the current source.

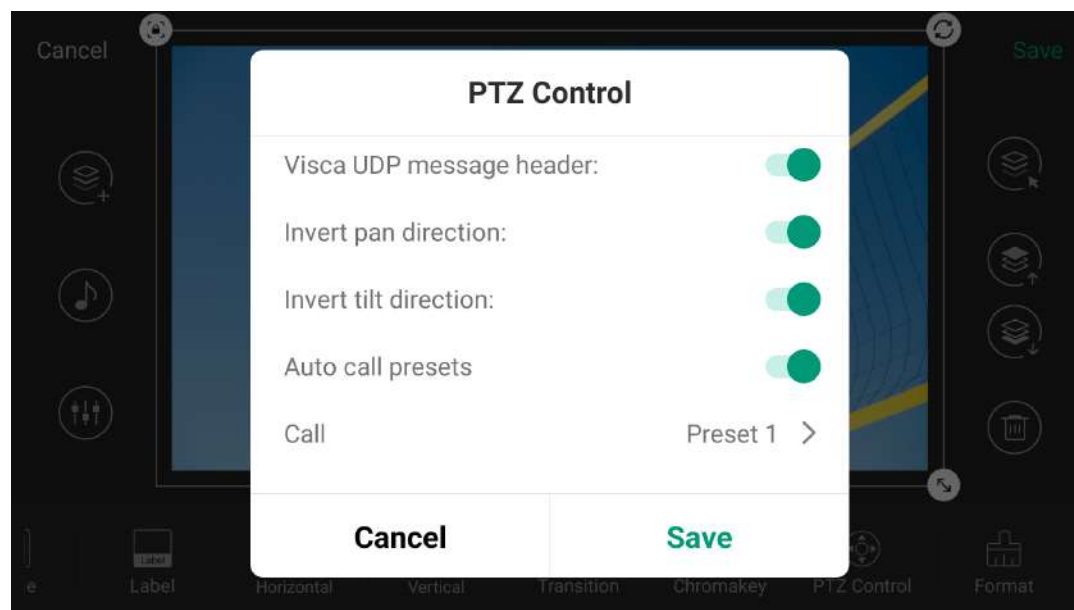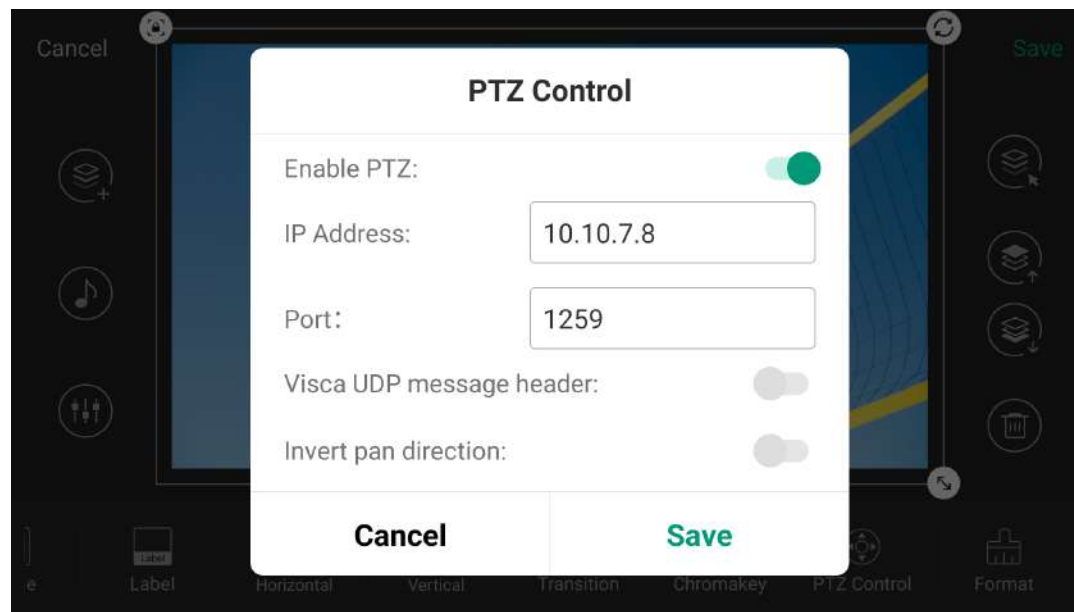

PTZ Control



When a source is connected with a PTZ camera supporting Visca UDP, you can enable this function to control the PTZ camera through the network. The PTZ camera and Director device must be able to ping each other. Supported sources include HDMI, WEBCAM, [SRT](#) and [RTMP](#).







When the NDI source is connected with a PTZ camera, you can also setting relative properties.

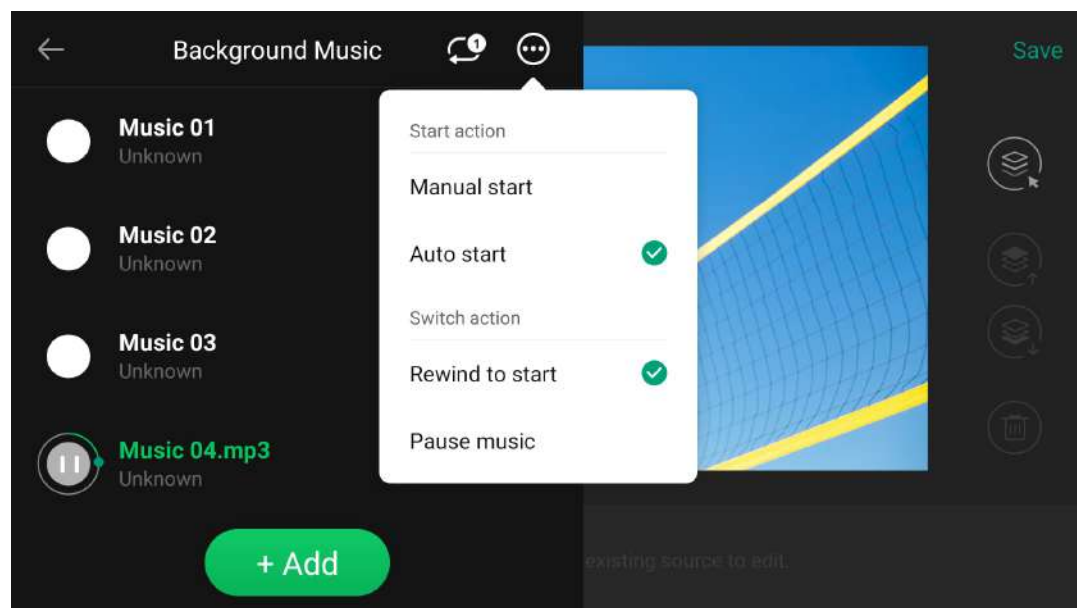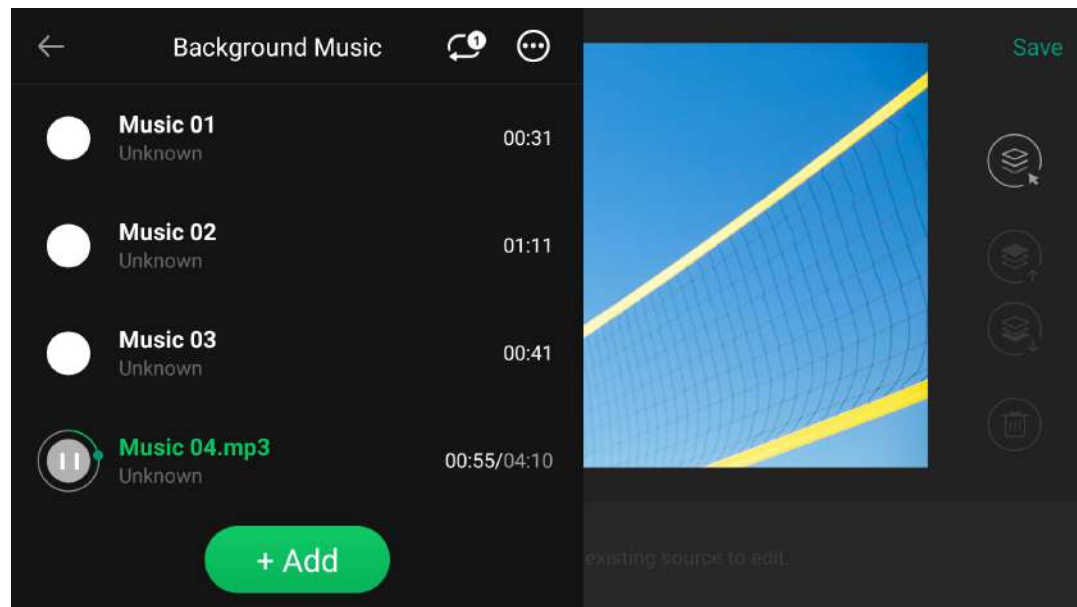- **Enable PTZ:** Toggle on to enable PTZ control. (Not available for NDI)
- **IP Address:** The IP address of your camera. (Not available for NDI)
- **Port:** Your camera's Visca protocol network port (Check the user manual of the camera or contact the manufacturer to get it). (Not available for NDI)
- **Visca UDP message header:** Toggle on this option if your camera's (e.g. SONY camera) communication protocol contains the Visca UDP header. Or else, the Director device may not be able to control the PTZ camera. (Not available for NDI)
- **Invert pan direction:** Toggle on to reverse the pan-direction movement. You can enable this option to make control more intuitive when the camera is not installed in the normal position.
- **Invert tilt direction:** Toggle on to reverse the tilt-direction movement. You can enable this option to make control more intuitive when the camera is not installed in the normal position.
- **Auto call presets:** Toggle on and select a preset. When the scene is switched to program, the camera moves to the selected preset position automatically. For how to set presets, please refer to [PTZ Control](#).

Background Music


You can add background music to a scene to enrich your show.



1. On the main screen, long press a scene thumbnail and tap **Edit** to open the Scene Editor.
2. Tap , select a storage path, and then select an audio file to add. Then, the **Background Music** page pops out. Supported formats are MP3, M4A, WAV files.
3. Tap **+ Add** to add more songs.
4. Tap on a song to start or pause.
5. Set the music playback policy at the upper right corner.
 -  : Repeat the playlist. (default policy)
 -  : Repeat the selected song.
 -  : Shuffle the playlist.
6. Tap  to set start action and switch action.
 - Start action:
 - Manual start: you need to start playing music manually.
 - Auto start: music starts playing automatically.
 - Switch action:
 - Rewind to start: Replays the song from the beginning.
 - Pause music: Pauses the song when the scene is switched out, and resumes when the scene is switched back.
7. To delete a song, swipe the song to the left and tap  .

Present Your Show


Director Mini provides lots of tools for conveniently presenting your show and adding eye-catching effects, making your show more professional and attractive.

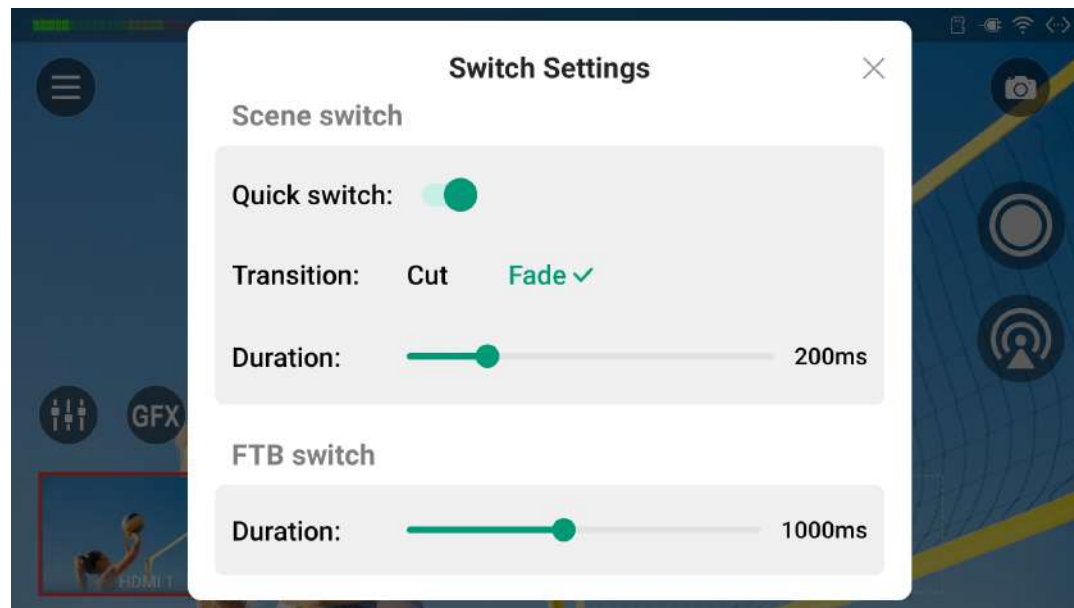


Control Scenes

Director Mini supports switching scenes with quick mode or manual mode.

Set Switch Mode

1. Tap , and select **Switch Settings**.
2. In the **Scene switch** area, set scene switch mode and transition effect.
 - **Quick switch:** Toggle off the switch, it goes to the manual switch mode. To enable the quick switch mode, toggle on the switch.
 - **Transition:** Select the transition effect for quick switch.
 - **Cut:** images switch directly when you switch scenes. (Default)
 - **Fade:** images switch with the fade effect when you switch scenes.
 - **Duration:** Drag the slider to set the transition duration for the Fade effect, ranging from 50ms to 1000ms.
3. In the **FTB switch** area, drag the slider of **Duration** to set the transition duration for **FTB**, ranging from 200ms to 2000ms.
4. Tap X to exit.

You can also change switch settings in the **Settings**. For details, see [Switch](#).

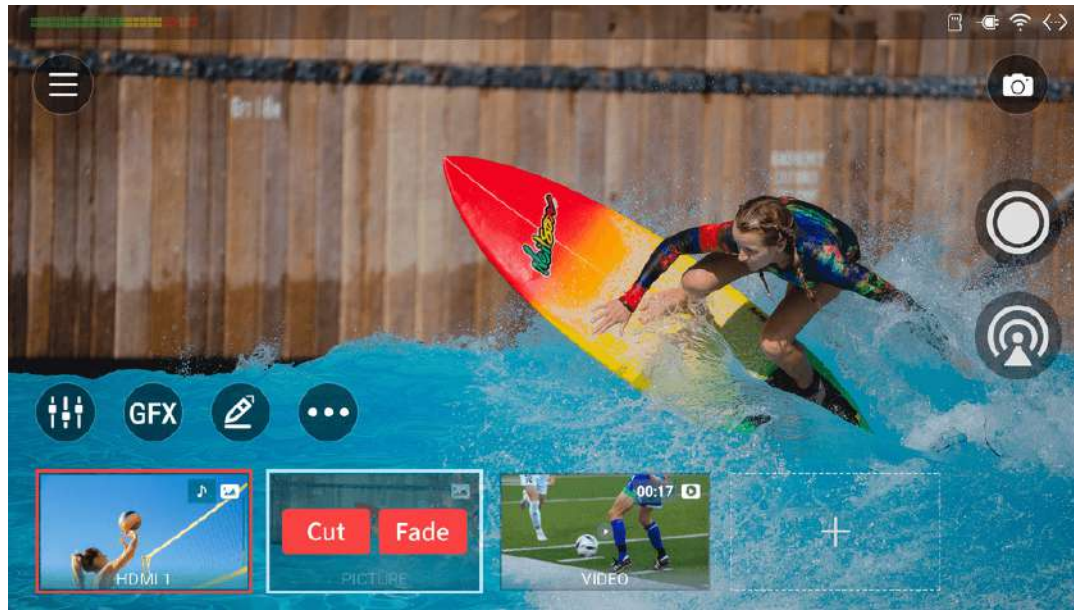

Switch Scenes

Quick Switch

When **Quick switch** is toggled on, you can tap thumbnails in the scene list to switch scenes directly.

Manual Switch

When **Quick switch** is toggled off, it goes to manual switch mode. You can set and preview the content to program. After you confirm everything is OK, you can program the scene.

1. Tap the thumbnail of next scene to program in the scene list. The main screen displays the preview content. The program scene thumbnail has a red frame, while the preview scene thumbnail has a white frame and displays **Cut** and **Fade** buttons.

The output image is the scene in Program view.

2. Adjust the audio volume, select elements to go with the preview scene to program, such as a **GFX**, and check everything is OK.

If a video clip is contained in the preview view, it will execute the configured start action and end action. Here are two actions differing from that in the program view.

- If it is set to "Manual start", you can tap the Play button in the center of the video clip to start to play while tap the center again to pause.
- If it is set to "Switch to scene x", it does not switch when the video clip ends, but displays the last frame.



3. Tap the **Cut** or **Fade** button on the preview scene thumbnail, and the scene goes to program directly or with the fade effect.

If a video clip is contained in the scene, after going to program, it re-executes the configured actions. The play progress in the preview view will not take effect.

FTB



The **FTB** (Fade to Black) function allows your show to fade into black or fade to image during streaming or recording, with no video nor audio output. This function is most often used at the end of a scene or show.



You can set fading to black or image on the Web UI.

- Tap , and select **FTB**.
Your audio/video output will be stopped.
- To continue your show, tap  > **FTB**.
Your show will go back to the screen and continue.

Freeze Scene



You can freeze dynamic images while streaming or recording.

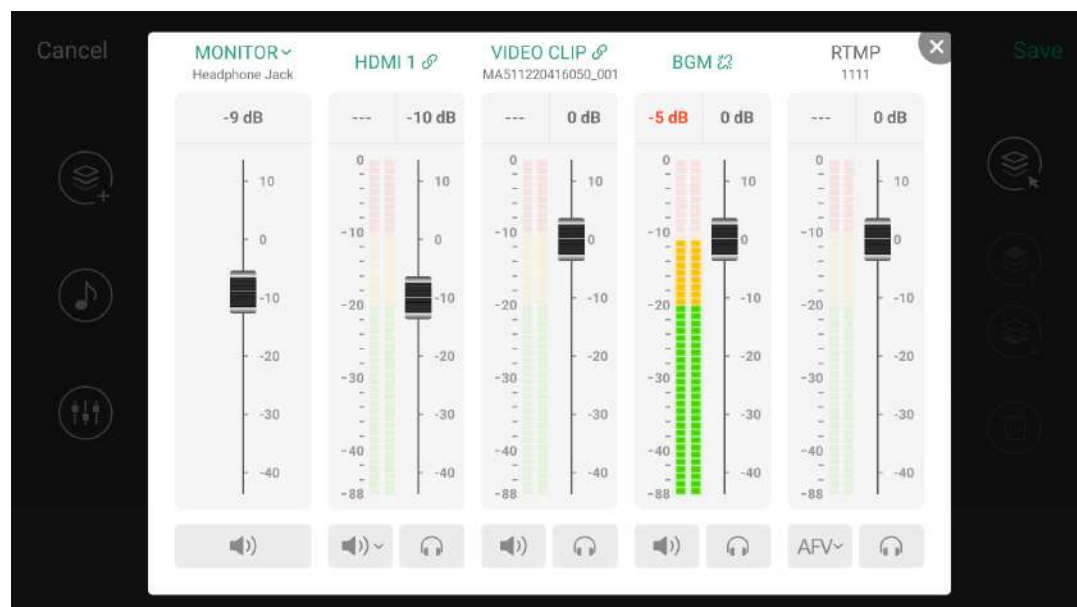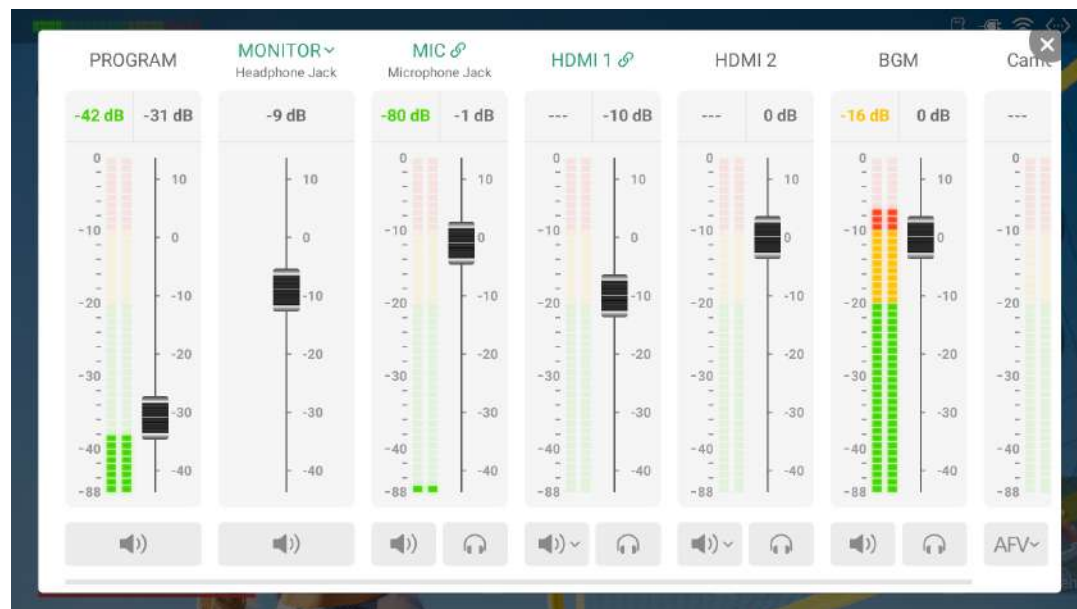- To freeze the scene, tap  and select **Freeze**.
- To unfreeze the scene, tap  and select **Unfreeze**.



Control Volume

The audio mixer is used to mix connected audio sources, external audio sources and built-in audio from BGM and video clips. You can access the audio mixer by the following ways.

- Tap  on the main screen to open the main audio mixer, which displays all the audio inputs and outputs of the current show.
- Long-press a thumbnail on the scene list, select **Edit** on the popup to enter the scene editor, and then tap  to open the scene's audio mixer, which displays the monitor and audio input sources of the current scene.

Audio Type

Scroll the audio mixer to view all the audio sources.

- **PROGRAM:** Output audio of the program scene, for streaming or recording.
- **PREVIEW:** Output audio of current previewing scene, only displayed during manual switch.
- **MONITOR:** Audio output for monitoring.
- **Audio Input Sources:**
 - **MIC:** Audio of global microphone.
 - **Bluetooth:** Audio from a Bluetooth device, which is displayed when the device is connected with Director Mini. (You need to [select Bluetooth Audio Input mode](#) in the Settings.)
 - **USB AUDIO:** Audio from a USB device, which is displayed when the device is connected with Director Mini.
 - **HDMI:** Audio from an HDMI source, which is displayed on the main audio

mixer by default.

- **RTMP Stream:** Audio from the **RTMP** stream source, displayed with the self-defined name.
- **SRT Stream:** Audio from the **SRT** stream source, displayed with the self-defined name.
- **NDI Stream:** Audio from the NDI stream source, displayed with the self-defined alias.
- **Phone Camera:** Audio from the phone, displayed with the self-defined name.
- **VIDEO CLIP:** Audio embedded in the video clip source, which appears when the current scene containing a video clip. It displays the file name under VIDEO CLIP to distinguish different files.
- **BGM:** Audio of the background music, which appears when the current scene contains BGM.

Audio Meter

Except monitor, each audio has its audio meter showing the real-time level. An audio meter of program is also displayed at the upper left corner of the home screen.

The range of the Audio Meter is -88 dB to 0 dB. It displays the peak value at the top of the audio meter (in portrait mode, on the right). Colored blocks and scales indicate the danger of clipping, as shown in the table below.

Color	Scale Range	Description
Green	-88 ~ -40	Audio device is connected.
Green	-40 ~ -20	Audio volume is low.
Yellow	-20 ~ -10	Audio is at normal levels.
Red	-10 ~ 0	Audio is in danger of clipping.



Adjust Audio Level

Each audio has a fader for adjusting the maximum level.

- Move the fader to set the gain on the audio level. The range is from -40dB to 10dB.
- The current adjusted value is displayed at the top of the fader. Double tap the value to restore the fader to 0dB.

Set Program Audio

Use the button at the bottom of PROGRAM (in portrait mode, on the right) to turn on or turn off the program output audio.

-  : indicating the program output audio is turned on.
-  : indicating the program output audio is turned off.

Set Monitor

The monitor has an independent audio level with the default gain of -15 dB. You can set monitor audio without effecting the program output audio.

Set Monitor Properties



Tap **MONITOR** to set the following properties.

- **Select Device:** select a device as the monitor.
 - Headphone Jack: device connected to the headphone jack.
 - Bluetooth Device: device connected through BT. (You need to [select Bluetooth Audio Output mode](#) in the Settings.)
 - *USB device:* USB device(s) connected to Director Mini. The system automatically lists device name(s).
- **Monitor Option:**



Toggle on/off the switch of **MIC Input** to set whether to monitor the microphone. It is toggled on by default.

Enable/Disable Monitor

Tap the button at the bottom of MONITOR (in portrait mode, on the right) to enable or disable audio monitoring.





-  : indicating audio monitoring is enabled.
-  : indicating audio monitoring is disabled.

Solo Monitor

- Tap  to only monitor this audio input.
- Tap  to cancel.




Set Audio Input Sources





Audio Association State

- When an audio input source is added to multiple scenes, its name is displayed in green on the audio mixer, and you can tap the name to change its association state. It also applies to global input including MIC, Bluetooth and USB audio.
 -  : indicating the audio input is associated with multiple scenes. The settings to this audio input will take effect to all the scenes.
 -  : indicating the audio input is not associated with other scenes. You can customize the audio mixing mode and adjust audio level for each scene.
 - When the state changes from  to  , the settings to this audio input will take effect to the whole show.
- When an audio input source is only contained in one scene, its name is displayed in black on the audio mixer and cannot be tapped. The settings to this audio input will take effect to all the scenes.

Set Audio Mixing Mode

Tap the icon to set the audio mixing mode of each audio input source.

- When the audio input source is in  state, or is only added in one scene.
 -  : Audio-follow-video. The audio will only be sent to the program output when the input is in program view.
 -  : Always ON. An audio input will be permanently mixed into the program output.

-  : Always OFF. An audio input will be permanently not mixed into the program output.
- When the audio is BGM, Video Clip or other audio input source in  state.
 -  : ON. When the current scene is in program view, the audio will be sent to the program output.
 -  : OFF. When the current scene is in program view, the audio will not be sent to the program output.





If you connect a Magewell USB Capture device to Director Mini, the USB audio supports AFV. For other USB devices, they do not support AFV.

If the current scene is in Preview view, the PROGRAM audio changes to PREVIEW.


All the audio settings in the Preview view will take effect after the scene goes to Program.

Use Magewell USB Capture

When a Magewell USB Capture is connected to Director Mini, you can control the embedded audio from the input signal and microphone/Line In audio.

- Embedded audio from the input signal: support setting  and  state. Please refer to [Set Audio Input Sources](#).
- Microphone/Line In audio:
 -  : ON. The audio input will be permanently mixed into the program output.
 -  : OFF. The audio input will be permanently not mixed into the program output

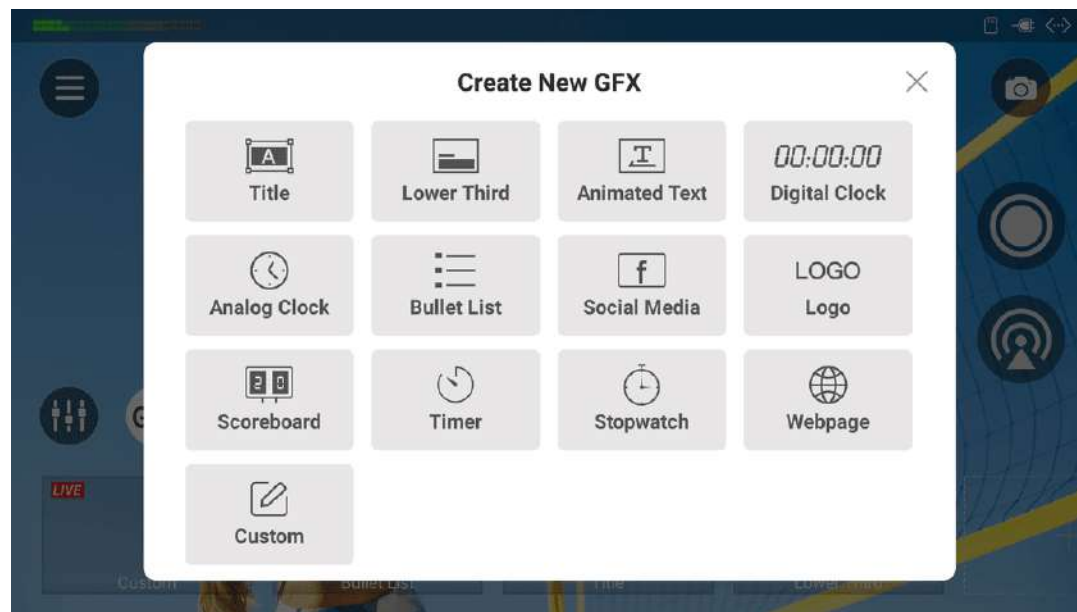


You can set more audio properties through "  > Settings > Audio". For details, see [Audio](#).



Use GFX



Graphic Overlay ([GFX](#)) enables a predefined logo, picture and text combination to show on the scene during recording and streaming. It is useful when you want to add lower thirds or a company logo to your show. It adds a professional touch to your show, making it more interactive. Rich [GFX](#) templates help you create [GFX](#) quickly and easily, and you can also create [GFX](#) from scratch. Besides, you can even add a webpage to use its content as an HTML [GFX](#).

Create GFX with Template

1. Tap  to open the [GFX](#) list.
2. Tap  to open the **Create New [GFX](#)** interface.
3. Select a [GFX](#) type. Options include title, lower third, animated text, digital clock, analog clock, bullet list, social media, logo, scoreboard, timer and stopwatch.
4. Select a template to enter the editor.
5. Tap  at the left to change template.

The templates of baseball scoreboard and other scoreboard cannot be exchanged.

6. Edit the [GFX](#) by referring to [GFX Templates](#).
7. Adjust the [GFX](#) size, rotation and position. For details, refer to [editing tools](#).
8. Tap **Save**, and the [GFX](#) thumbnail appears in the [GFX](#) list.

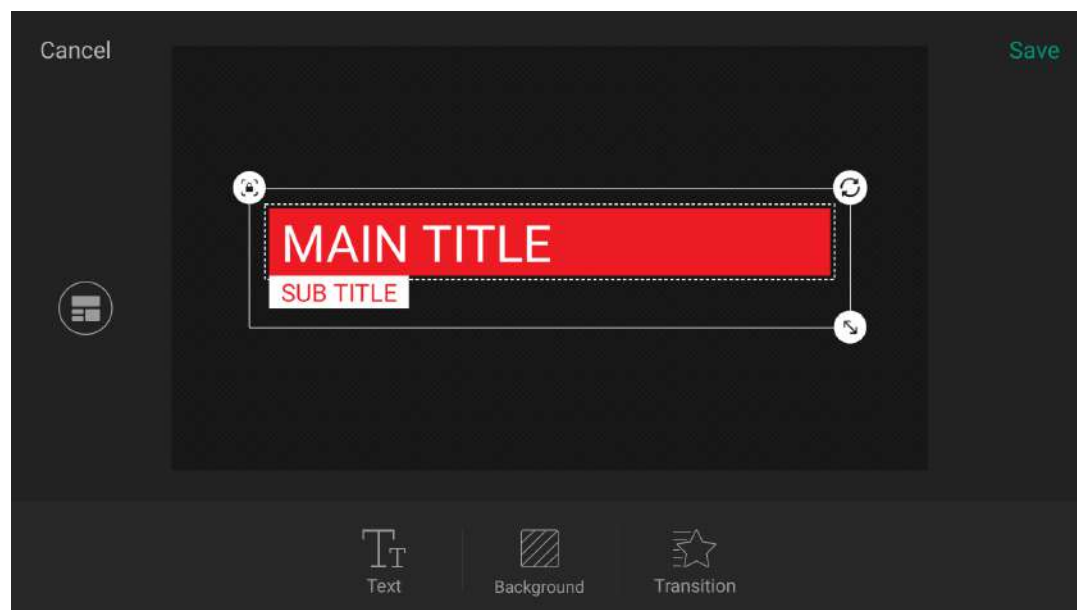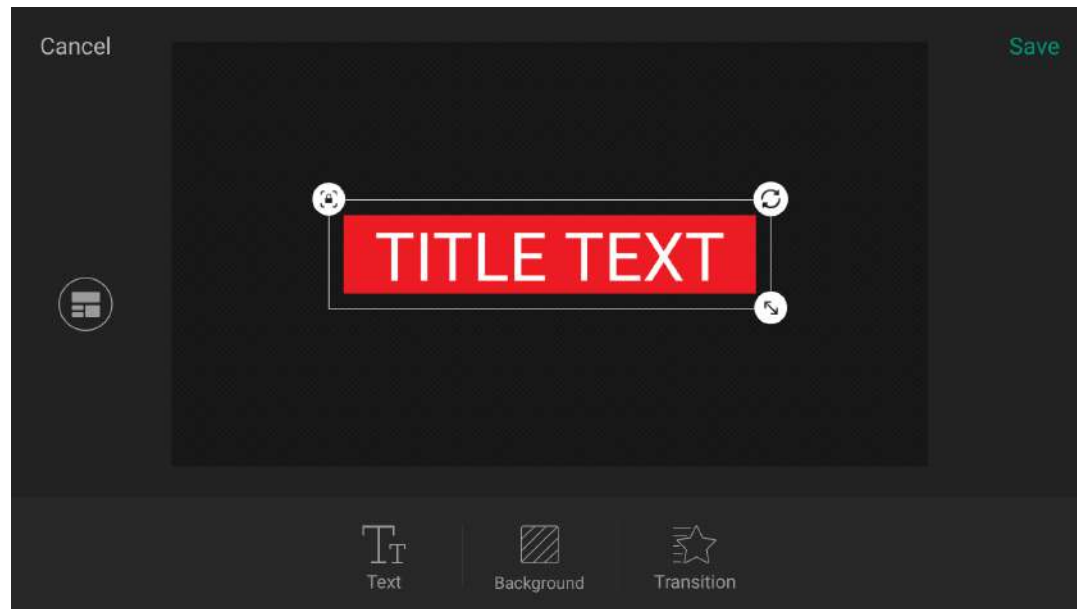

GFX Templates

Director Mini provides various [GFX](#) templates helping you display more information during program.

Title


A title shows the theme of your show, and a good title will make your show more engaging.

1. Tap text boxes and enter content.
2. Set text format, background and transition effect. See [Editing Tools](#) for details.

Lower Third

Lower third is often used show the name of who is talking or to give vital information about an event.


1. Tap text boxes and enter content.
2. Set text format, background and transition effect. See [Editing Tools](#) for details.

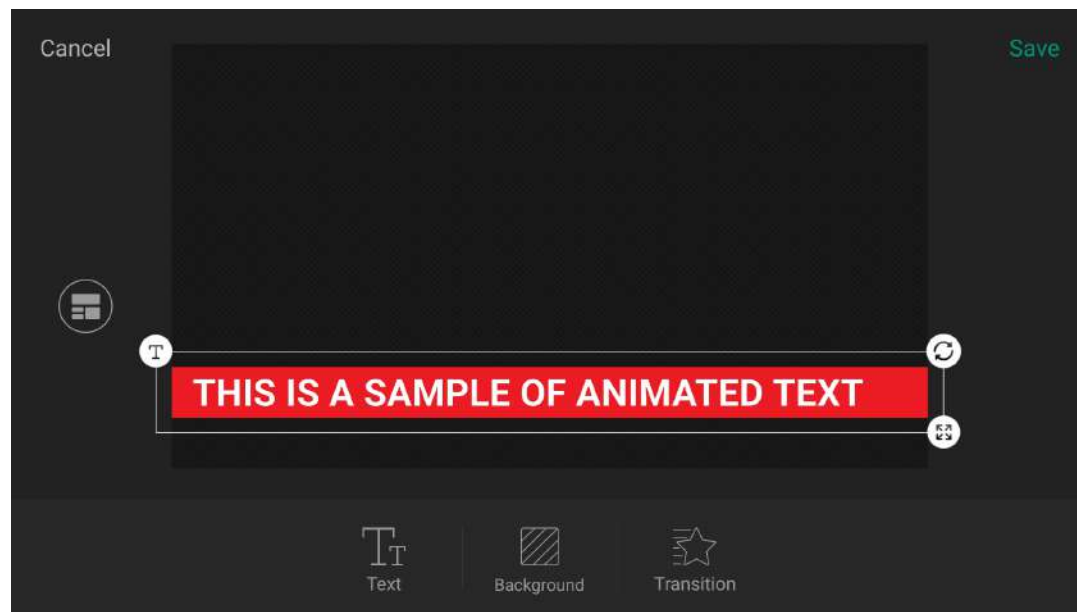

Animated Text

Animated text craws horizontally for displaying sports news, breaking news, weather report, etc.


1. Tap the text box, and then enter content, or tap **Import** at the upper right corner to import from a txt or rtf file. It supports up to 1024 characters. If the imported text has line breaks, you can select to import the first paragraph or import all paragraphs with line breaks being deleted automatically.
2. Set text format, background and transition effect. See [Editing Tools](#) for details.

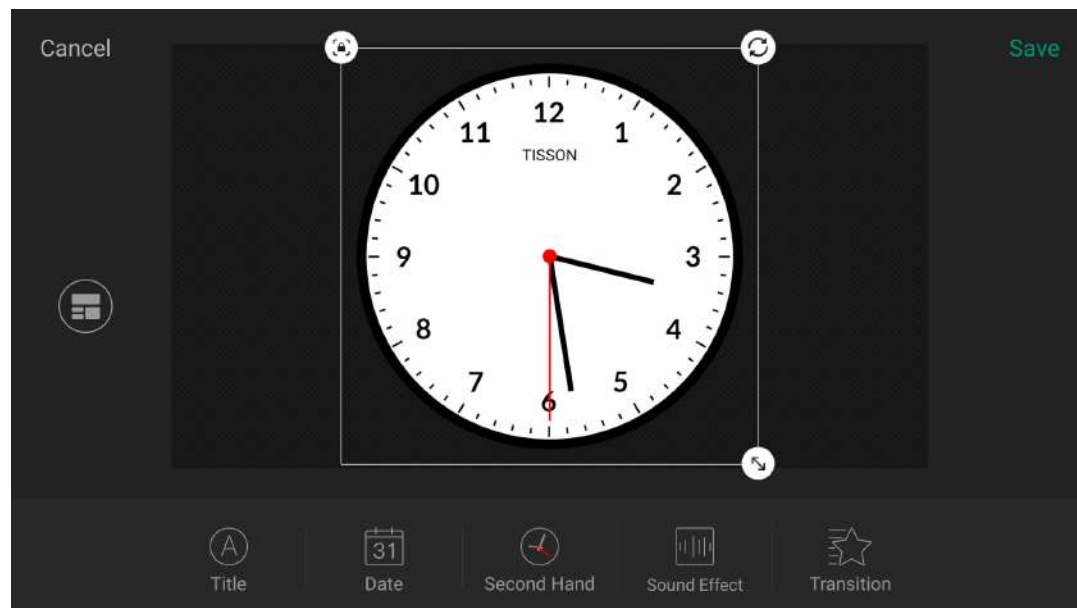

Analog Clock

Analog Clock displays a clock, which can be embedded with date and other information.


- **Title:** Set whether to show the title, and edits the title's name, font, size, and transparency.
- **Date:** Set whether to show date and selects date format.
- **Second Hand:** Set the second hand mode. Options include No second, Sweeping second and Jumping second.
- **Transition:** Set transition effect.

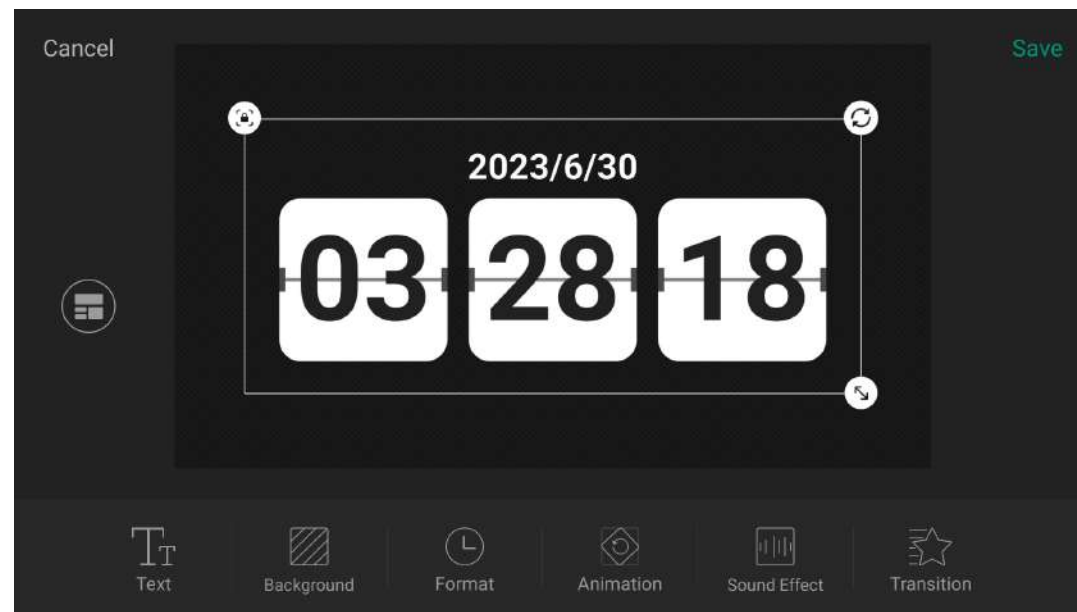

Digital Clock

Digital Clock displays digital date and time, which are synchronized with the system.


- **Text:** Set the number's color, size, font and transparency.
- **Background:** Specify a solid color, gradient color or picture as the clock's background, and sets the transparency.
- **Format:** Toggle on/off the switches to enable or disable the following properties, and then tap Save.
 - 24 hour clock
 - Show seconds
 - Show colon
- **Animation:** Set the clock's animation effect. Options include Classic, Flip, Gradient, Drop and Swivel.
- **Sound Effect:** Set the clock's sound effect. Options include: None (default), Modern, Old, Crisp, Ticktock and Tradition.
- **Transition:** Set transition effect.

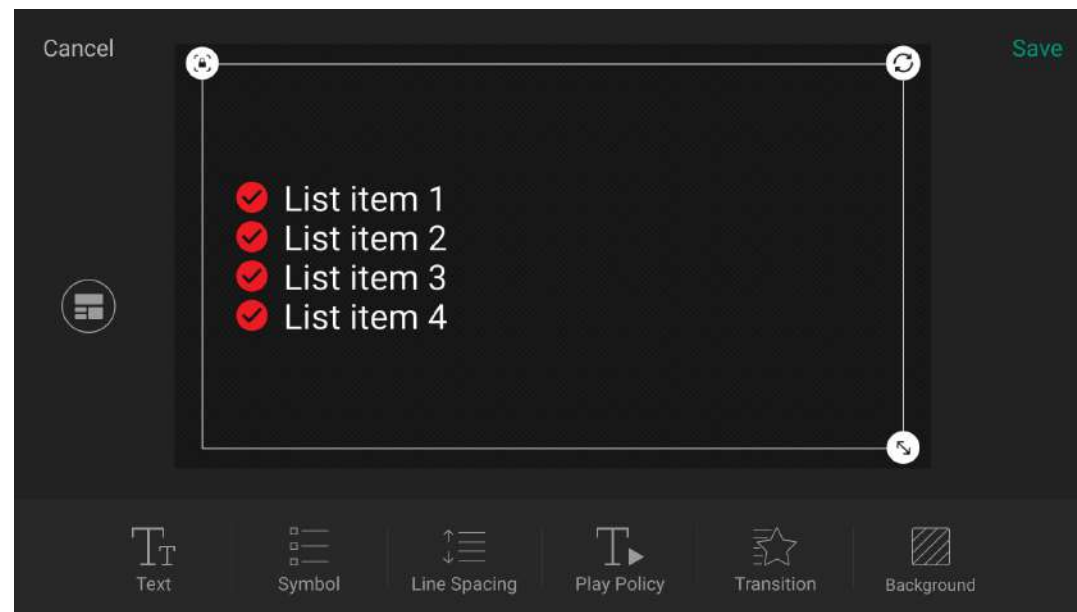

Bullet List

Bullet List can list important information clearly.

1. Tap the text box, enter your content, and tap Enter to add a new item.
To delete one list item, delete all the content of this item.
2. Set properties of the bullet list.
 - **Text:** Set the text's format, including font, size, color, case, transparency and shadow.
 - **Symbol:** Set the symbol's style, size and color.
 - **Line Spacing:** Set the vertical space between the lines.
 - **Play Policy:** Set how to play list items when the list is displayed.
 - **Play policy:** You can set to play "All at once", that is, all list items appear together; or play "By paragraph", that is, list items appear one by one.
 - **Play mode:** When playing by paragraph, you can choose "Auto Play", that is, the list items will be played automatically according to the set "Play speed"; or choose "Manual Play", that is, after the list is applied, you can tap the screen to display list items one by one.
 - **Play speed:** Set the play speed for auto play. Options include very slow, slow, medium, fast and very fast.
 - **Play effect:** Set the play effect of list items appearing by paragraph. Options include none, fade, fly in, expand, zoom in, and typewriter.
 - **Transition:** Set transition effect.
 - **Background:** Specify a solid color, gradient color or picture as the bullet list's background, and set the transparency.

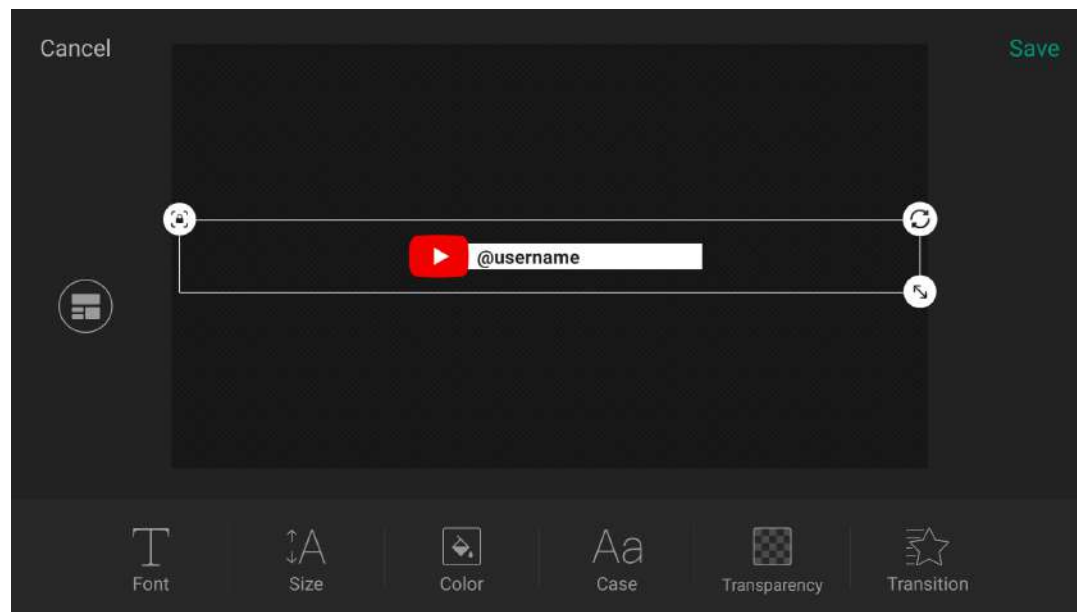


Social Media

Social Media displays your account to attract more followers.

1. Tap text box and enter content.
2. Set text format and transition effect. See [Editing Tools](#) for details.

The logo cannot be changed. You can switch by changing the template.

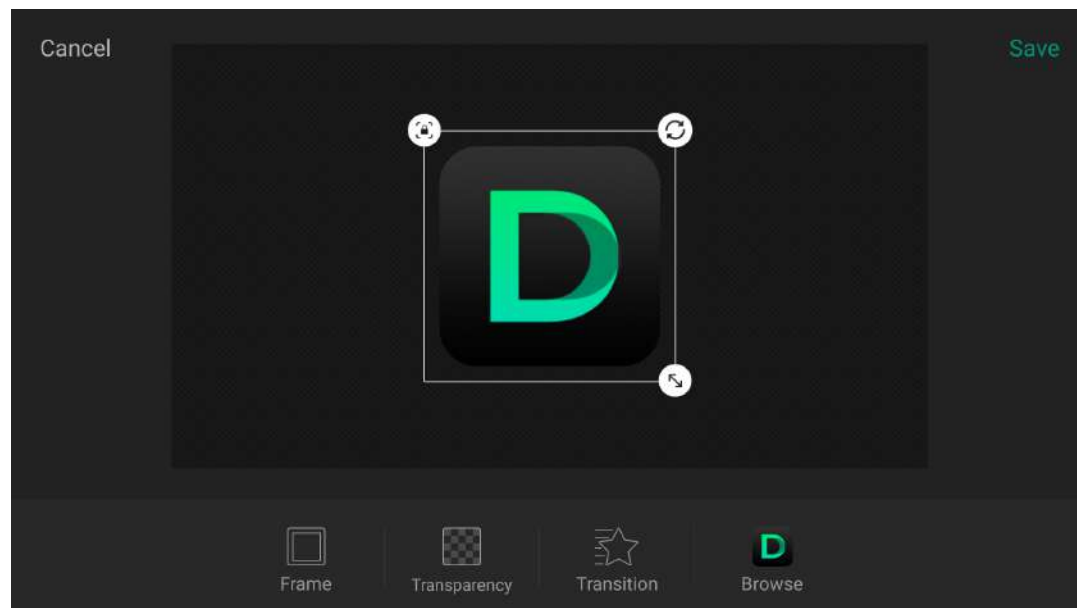


Logo

Logo supports to import one picture, such as a company logo and brand logo.

The supported formats include JPG, PNG and BMP.

1. Select a picture from the storage.
2. Set the picture's frame, transparency and transition effect. See [Editing Tools](#) for details.

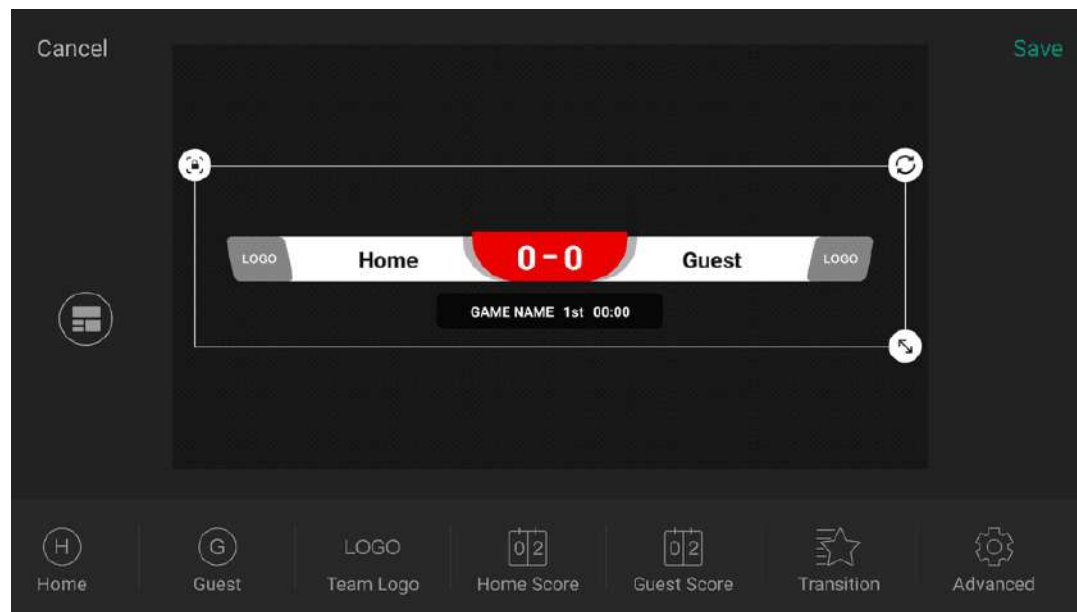

Scoreboard

Scoreboard displays the scores of a game. It only supports to create one scoreboard.


Basic Settings

- **Game Name**
 - Toggle on/off the switch of **Show Name** to set whether to show the game name.
 - Set game name's content, font, size, color, transparency, and background.
- **Home:** Set the home team's name, text font, size, color, transparency and background.
- **Guest:** Set the guest team's name, text font, size, color, transparency and background.
- **Team Logo**
 - Toggle on/off the switch of **Show Logo** to set whether to show team logos.
 - Set the home logo and guest logo, and adjust their size.
- **Home Score:** Set font, size, color, transparency and background for the home team's score. Whether the score background can be set is determined by the template.
- **Guest Score:** Set font, size, color, transparency and background for the guest team's score. Whether the score background can be set is determined by the template.
- **Transition:** Set transition effect.

Advanced Settings

Tap **Advanced** to further customize the scoreboard.

- **Show game name:** Toggle on/off the switch to set whether to show game name.
- **Show game time:** Toggle on/off the switch to set whether to show game time. When it is toggled on, the Countdown option appears, and you can make the following settings.
 1. Toggle on/off the switch to set whether to enable countdown.
 2. Tap the number and scroll time options to set the duration.
- **Game time format:** Select a preferred format.
- **Show period:** Toggle on/off the switch to set whether to show period. When the switch is toggled on, the **Period name** option appears, tap to open the period list and make the following settings.
 - Add period: Tap "+ Add", enter the period name, and tap "Save".
 - Select period: Tap any period as the current period. The default periods include 1st, 2nd and 3rd.
 - Delete period: Swipe a period to the left, and then tap "Delete".
- **Score added:** Tap "+" or "-" to set the add score each time. The default value is 1.
- **Allow negative score:** Tap on/off the switch to set whether to allow the score being lower than 0.

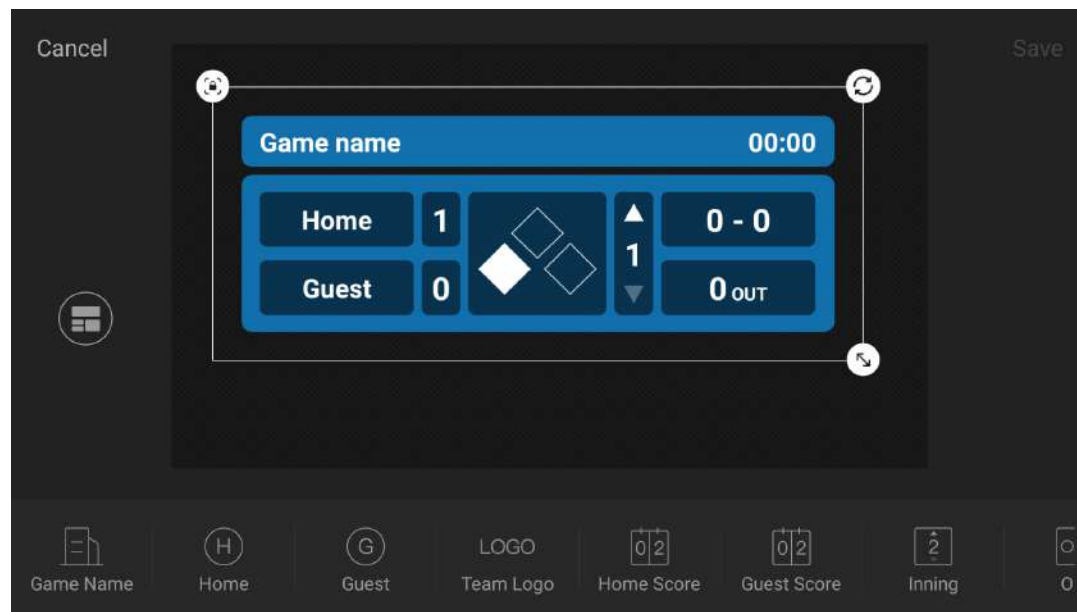

Baseball Scoreboard

The baseball scoreboard can show lots of elements for easy control.

Select a baseball scoreboard from scoreboard template library, and then start customizing your own layout.

Basic Settings


- **Game Name**
 - Toggle on/off the switch of **Show Name** to set whether to show the game name.
 - Set game name's content, font, size, color, transparency, and background.
- **Home:** Set the home team's name, text font, size, color, transparency and background.
- **Guest:** Set the guest team's name, text font, size, color, transparency and background.
- **Team Logo:** Whether the team logo can be set is determined by the template.
 - Toggle on/off the switch of **Show Logo** to set whether to show team logos.
 - Set the home logo and guest logo, and adjust their size.
- **Home Score:** Set font, size, color, transparency and background for the home team's score.
- **Guest Score:** Set font, size, color, transparency and background for the guest team's score.
- **Inning:** Set font, size, color, transparency and background for innings.
- **Out:** Set font, size, color, transparency and background for outs.

- **Ball-Strike:** Set font, size, color, transparency and background for balls and strikes.
- **On Base Runners:** Set color, transparency and background for on-base runner indicators.
- **Background:** Set background for the baseball scoreboard. Whether the background can be set and the extent to which it takes effect is determined by the template.
- **Transition:** Set transition effect.

Advanced Settings

Tap **Advanced** to further customize the scoreboard.


- **Show game name:** Toggle on/off the switch to set whether to show game name.
- **Show game time:** Toggle on/off the switch to set whether to show game time. When it is toggled on, the Countdown option appears, and you can make the following settings.
 1. Toggle on/off the switch to set whether to enable countdown.
 2. Tap the number and scroll time options to set the duration.
- **Game time format:** Select a preferred format.
- **Show Inning:** Toggle on/off the switch to set whether to show Inning.
- **Show Outs:** Toggle on/off the switch to set whether to show Outs.
- **Show Ball-Strike:** Toggle on/off the switch to set whether to show Ball-Strike.
- **Show On-Base Runners:** Toggle on/off the switch to set whether to show On-Base Runners.

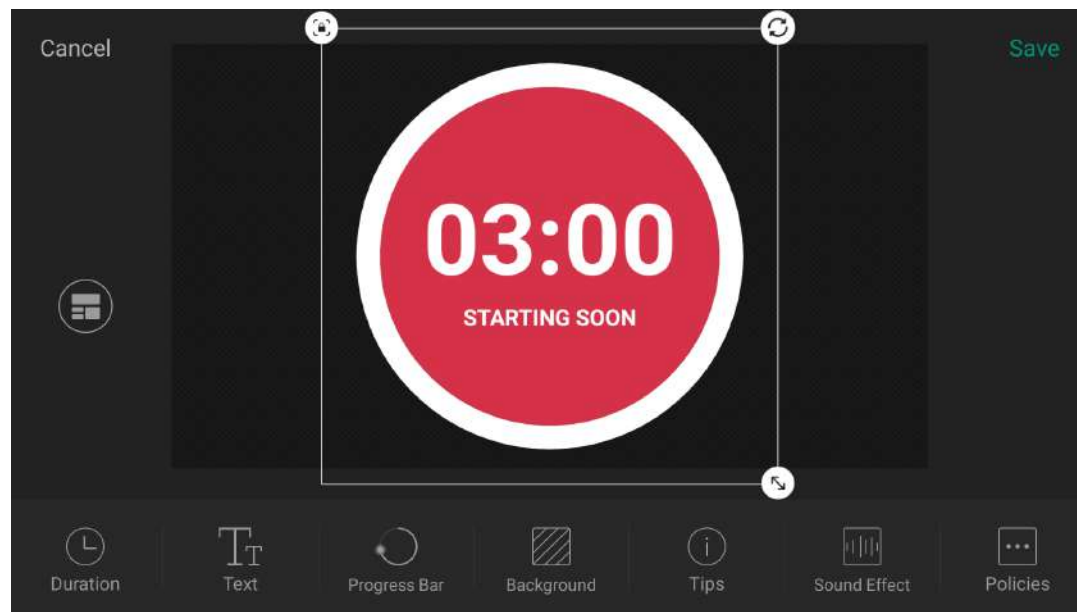

Timer

You can use Timer to countdown. It only supports to create one timer.

- **Duration:** Scroll hour, minute and second options to set the duration.
- **Text:** Set the font, size, color, and transparency of numbers.
- **Progress Bar:** Set the color of progress bar.
- **Background:** Set the color and transparency of background.
- **Tips:** add some custom tips under the numbers.
 - Toggle on/off the switch of **Show** to set whether to show tips.
 - Set the content, font, size, color and transparency of tips.
- **Sound Effect:** Set the timer's sound effect. Options include: None (default), Modern, Old, Crisp, Ticktock and Tradition.
- **Policies:** Set the policies of timer.
 - When the timer is displayed, you can set "Manual start" or "Auto start".
 - When the timer is hidden, you can select one policy.
 - Auto pause: If the timer is counting, it pauses.
 - Ignore: If the timer is counting, it continues counting; if the timer is not counting, it does not count.
 - Reset: The timer is restored to the set duration.
 - When the timer reaches zero, you can set to hide the timer.
 - When the timer reaches zero, you can also set to switch to another scene. After toggling on the switch, tap "Switch to", and select a scene. When the timer counts down to the last 10s, the scene to switch to will be highlighted with a flashing yellow frame, a LIVE SOON mark and a countdown clock.

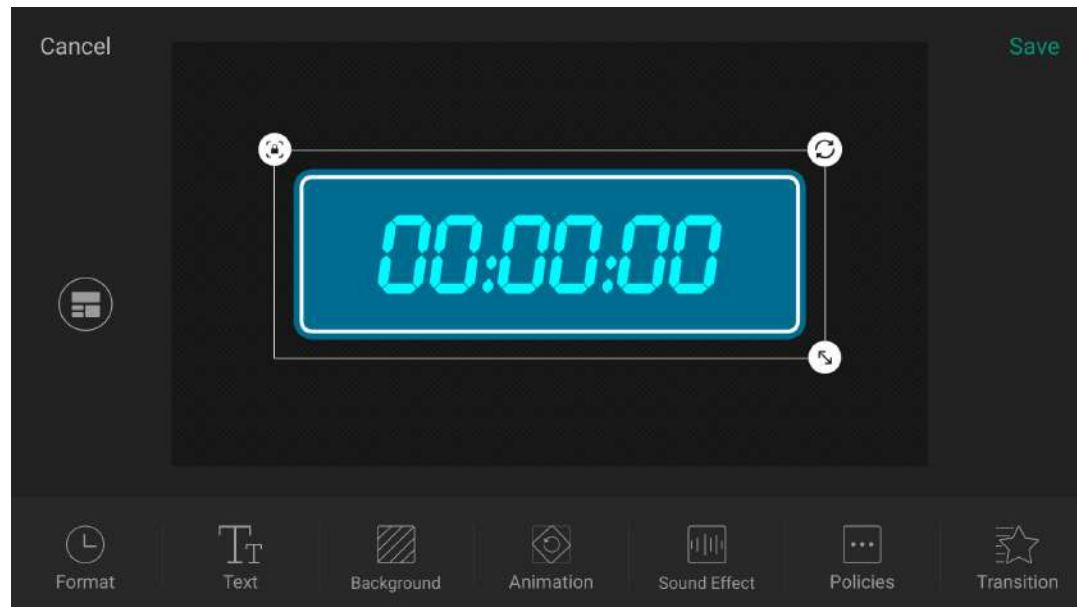

- **Transition:** Set transition effect.

Stopwatch

You can use Stopwatch to count up. It only supports to create one stopwatch.


- **Format:** Select one stopwatch format. Options include H:M and H:M:S.
- **Text:** Set the font, size, color, and transparency of numbers.
- **Background:** Specify a solid color, gradient color or picture as the background, and sets the transparency.
- **Animation:** Select an animation effect for the numbers. Options include classic, flip, gradient, drop, and swivel. After you select an effect, the stopwatch will count three seconds to show the effect for preview.
- **Sound Effect:** Set the stopwatch's sound effect. Options include: None (default), Modern, Old, Crisp, Ticktock and Tradition.
- **Policies:** Set the policies of stopwatch.
 - When the stopwatch is displayed, you can set "Manual start" or "Auto start".
 - When the stopwatch is hidden, you can select one policy.
 - Auto pause: If the stopwatch is counting, it pauses.
 - Ignore: If the stopwatch is counting, it continues counting; if the stopwatch is not counting, it does not count.
 - Reset: The stopwatch is restored to zero.
- **Transition:** Set transition effect.




Create Webpage GFX





1. Tap **GFX** to open the **GFX** list.
2. Tap **+** to open the **Create New GFX** interface.
3. Choose **Webpage**.
4. Enter a URL, and tap **Go** or **Confirm**.
5. Edit the webpage in the **GFX** editor.
 - Adjust the **GFX** size, rotation and position. For details, refer to [editing tools](#).
 - **Transparency**: adjust the webpage's transparency.
 - **Crop**: crop the webpage, referring to [Crop](#).
 - **URL**: change the URL and tap **Save**.
 - **CSS**: select a CSS option to set the background of webpage.
 - Default CSS: Use the default background of the webpage.
 - Transparent CSS: Change the background to transparent.
 - Custom CSS: Enter your own CSS, or tap **Import** to import a CSS file from the storage, and then tap **Save**.
 - **Reset**: clear all the changes.
6. Tap **Save**, and the webpage thumbnail appears in the **GFX** list.
7. To edit a webpage, tap **+**, select **Webpage**, and tap a thumbnail in the History to enter the **GFX** editor. Or, you can refer to [Edit GFX](#).
8. To delete a webpage, tap **+**, select **Webpage**, long-press a thumbnail in the History, tap **🗑️**, and confirm to delete in the popup.

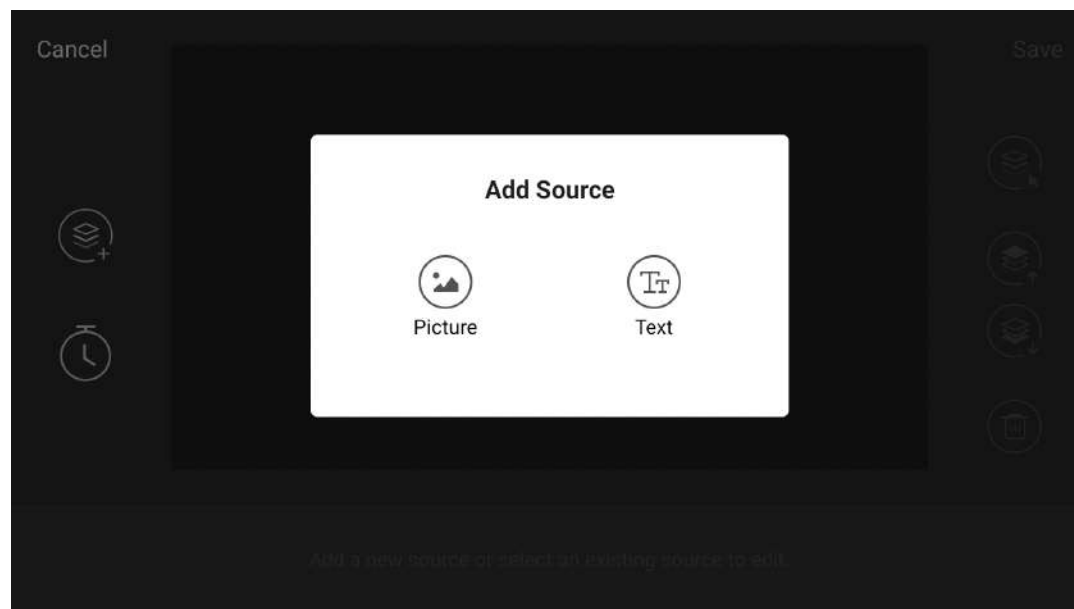It is not recommended to add a video URL as it will consume a lot of system resources.

You can add up to 7 webpages. When it reaches 7, you cannot edit or delete them by tapping .



Create Custom GFX

1. Tap  to open the [GFX](#) list.
2. Tap  to open the **Create New GFX** interface.
3. Choose **Custom** to enter the [GFX](#) editor.
4. Tap , choose **Picture** to add a picture, or choose **Text** to add text content.
5. Edit the picture and text. See [editing tools](#) for details.
6. (Optional) Set timing, which makes the [GFX](#) disappearing automatically.
 - a. Tap  on the left.
 - b. Toggle on Timing.
 - c. Scroll time options to set the duration.
 - d. Tap Confirm.
7. Tap **Save**, and the [GFX](#) thumbnail appears in the [GFX](#) list.



Apply GFX


You can apply up to 8 GFXs in a show at the same time.

1. Tap **GFX** to open the **GFX** list.
2. Tap one **GFX** thumbnail, and then the **GFX** is displayed in the scene. A ✓ appears on the selected thumbnail.
3. If a bullet list is applied, and it is set as manual play mode, you can tap the text content on the screen to display the next line. (Only working in the program scene)
4. To cancel, tap one selected thumbnail, the **GFX** disappears.

If you select or unselect a **GFX** in the preview scene, your choice only takes effect after you switch the preview to program. If you do not tap the Switch button but tap the program scene again, your choice will be discarded.

For the time counting related policies of some GFXs, including the policies of timer and stopwatch, and the timing of a custom **GFX**,

- In the program scene, when the **GFX** is selected, policies execute normally.
- In the preview scene, when the **GFX** is selected, policies do not execute; only when you switch the preview to program, policies start executing.
- If a **GFX** is applied in the program scene, in the preview scene, policies will go on executing.

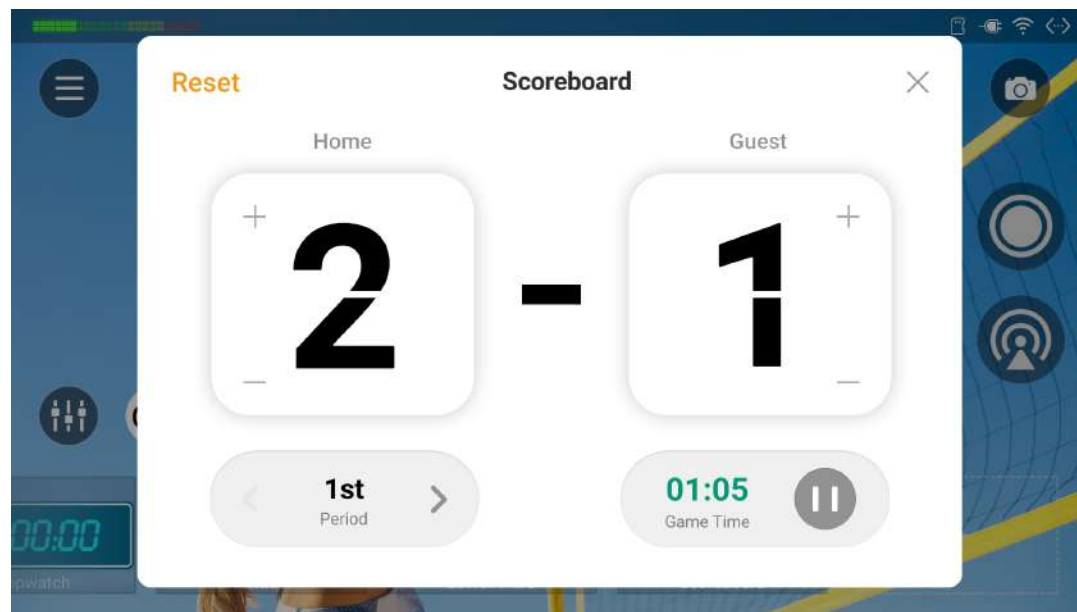




Control Scoreboard

You can open the scoreboard control panel through the following ways.

Way 1: When the scoreboard is applied, tap .




Way 2: Tap  to open the [GFX](#) list, long-press the scoreboard thumbnail and tap **Control** on the popup.

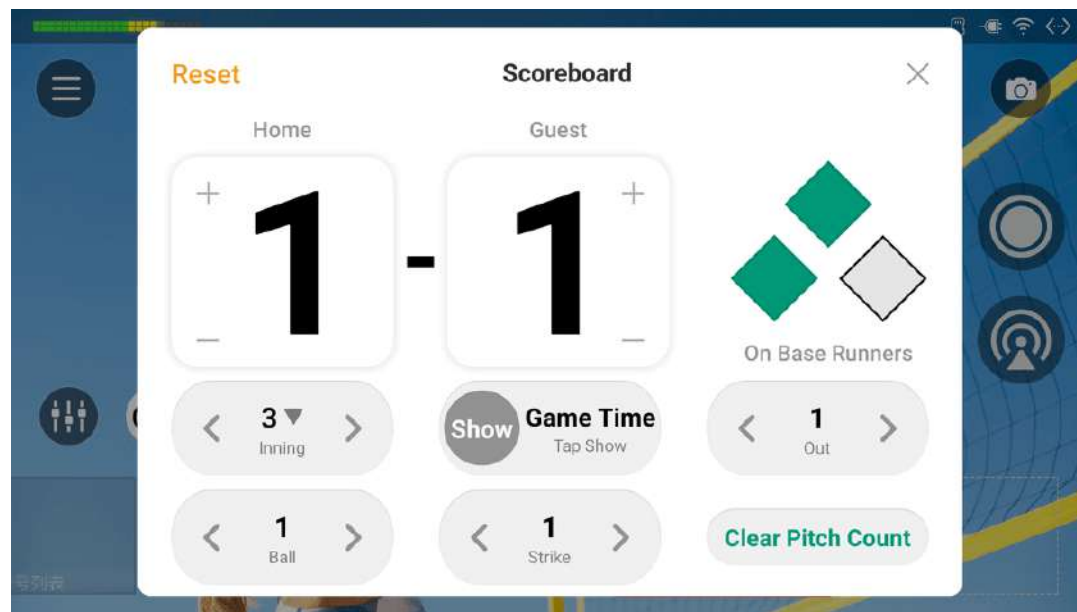- Adjust score: Tap the upper part of the number to increase the score, and tap the lower part of the number to decrease the score.
- Select period: Tap the left or right arrow at the bottom left to select a period. If the period is not set to be shown, you can tap "Show" to display it.
- Control game time:
 - Tap  at the bottom right to start counting; tap  to pause counting.
 - If the game time is not set to be shown, you can tap "Show" to display it.
 - Tap the time number, and scroll time options to adjust.
- Reset: Tap "Reset" to restore the score to 0:0, reset the game time to zero or reset to the set duration.
- Tap "x" to return to the main screen.




Control Baseball Scoreboard

When you apply a baseball scoreboard, the control method is as follows.

- Tap the upper part of the number to increase the score, and tap the lower part of the number to decrease the score.
- Tap  to indicate runners on 1st Base, 2nd Base, and 3rd Base.
- Tap the left or right arrow of **Inning** to set inning number and its "top" or "bottom" half. And confirm whether to also clear settings of on-base runners, outs, balls and strikes on the popup.
- Control game time:
 - Tap  to start counting; tap  to pause counting.
 - Tap the time number, and then select time in the time box to adjust time.
- Tap the left or right arrow of **Out** to indicate outs as numbers or shapes.
- Tap the left or right arrow of **Ball** to indicate balls as numbers.
- Tap the left or right arrow of **Strike** to indicate strikes as numbers.
- Tap **Clear Pitch Count** to make balls and strikes both zero.
- Tap **Reset** to clean all the sets.
- Tap "x" to exit.


If some element is set to be hidden, you can tap "Show" to display it.

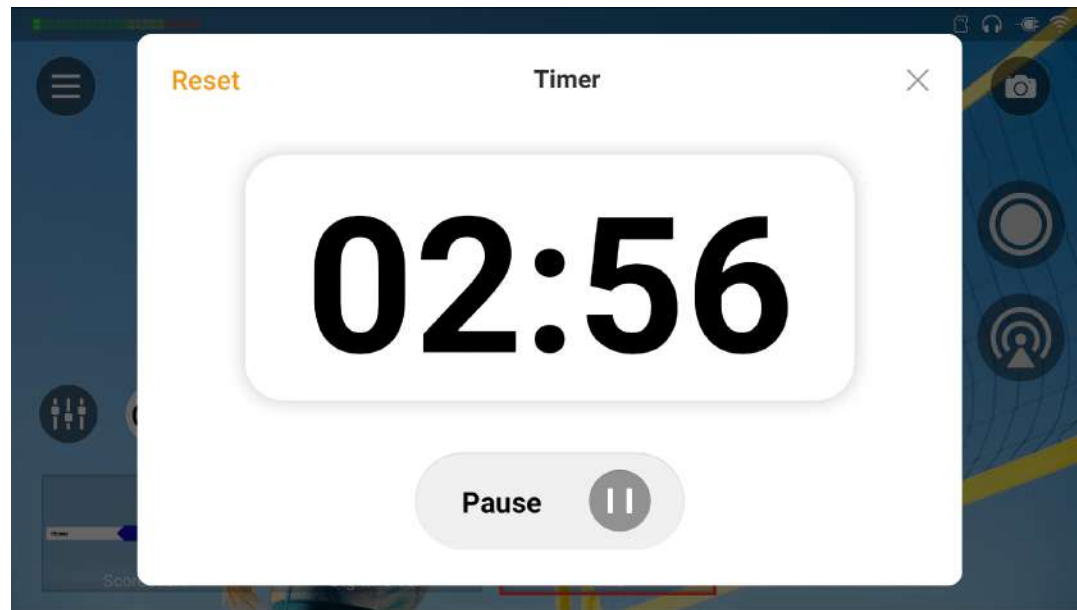




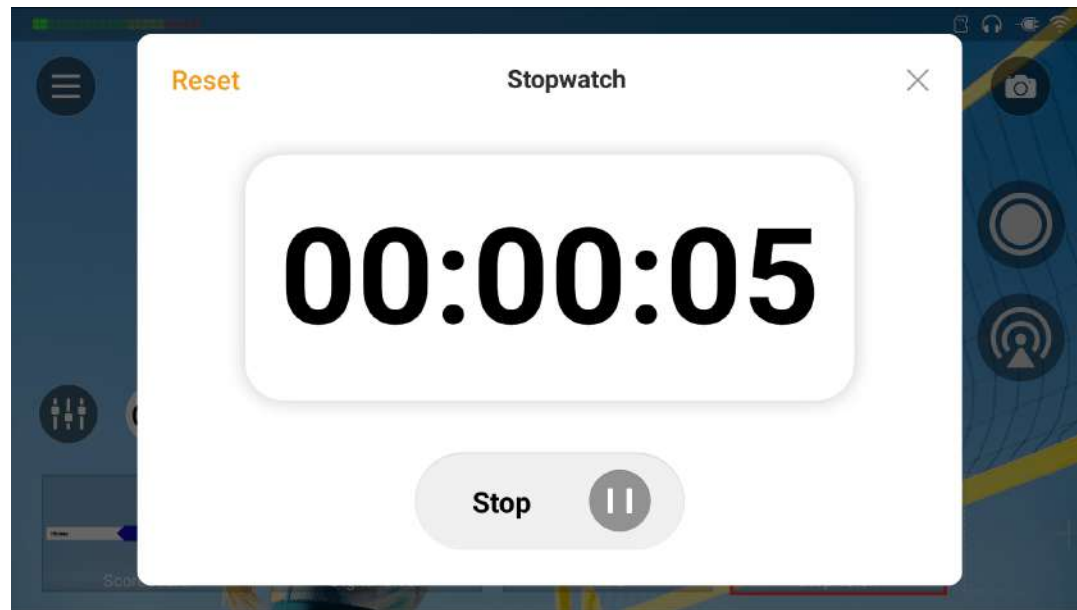
Control Timer

You can open the timer control panel through the following ways.

Way 1: When the scoreboard is applied, tap .

Way 2: Tap  to open the [GFX](#) list, long-press the timer thumbnail and tap **Control** on the popup.


- Adjust duration: scroll hour, minute or second options to reset duration.
- Control counting: Tap  to start counting, tap  to pause counting, tap  again to resume counting.
- Reset: Tap **Reset** to restore the timer to the set duration, and you can re-select the duration.
- Tap "x" to return to the main screen.






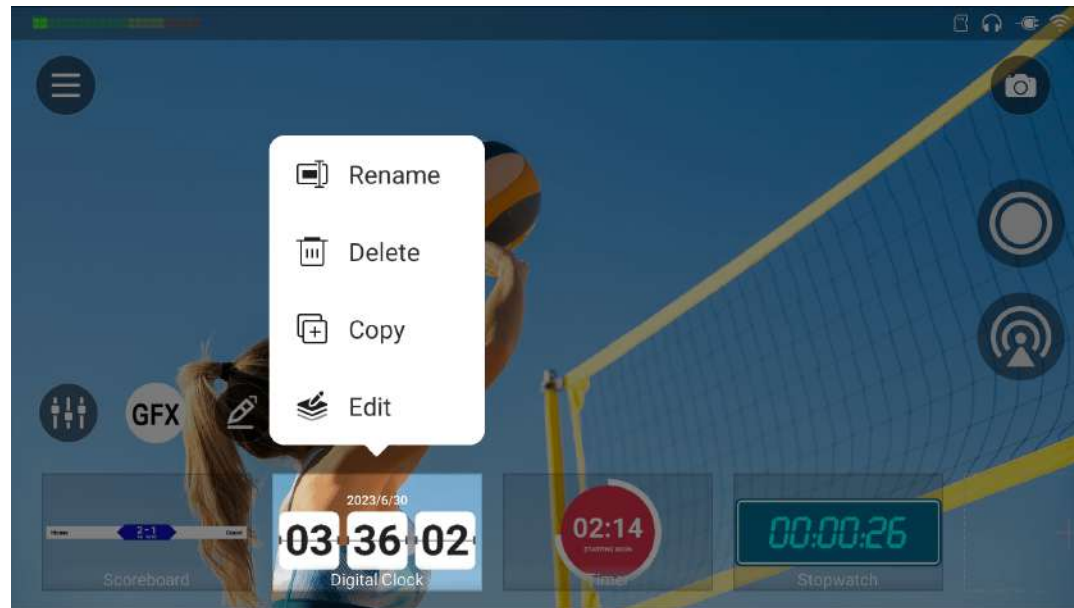
Control Stopwatch

You can open the stopwatch control panel through the following ways.

Way 1: Tap .

Way 2: Tap  to open the [GFX](#) list, long-press the stopwatch thumbnail and tap **Control** on the popup.

- Control counting: Tap  to start counting, tap  to pause counting, tap  again to resume counting.
- Reset: Tap **Reset** to reset the timer to zero.
- Tap "x" to return to the main screen.



Rename GFX

Each **GFX** is named as the **GFX** type by default. You can rename the **GFX**.

1. Tap **GFX** to open the **GFX** list.
2. Long-press one **GFX** thumbnail.
3. Tap **Rename**, enter the new name and tap **Save**.

Copy GFX

You can copy an existing **GFX** to create a new **GFX**.

You cannot copy the scoreboard, timer or stopwatch.

1. Tap **GFX** to open the **GFX** list.
2. Long-press one **GFX** thumbnail.
3. Tap **Copy**, and the copied **GFX** appears last in the **GFX** list.


Edit GFX

You can edit the existing **GFX**.

1. Tap **GFX** to open the **GFX** list.
2. Long-press one **GFX** thumbnail.
3. Tap **Edit** to open the editor and then start to edit.





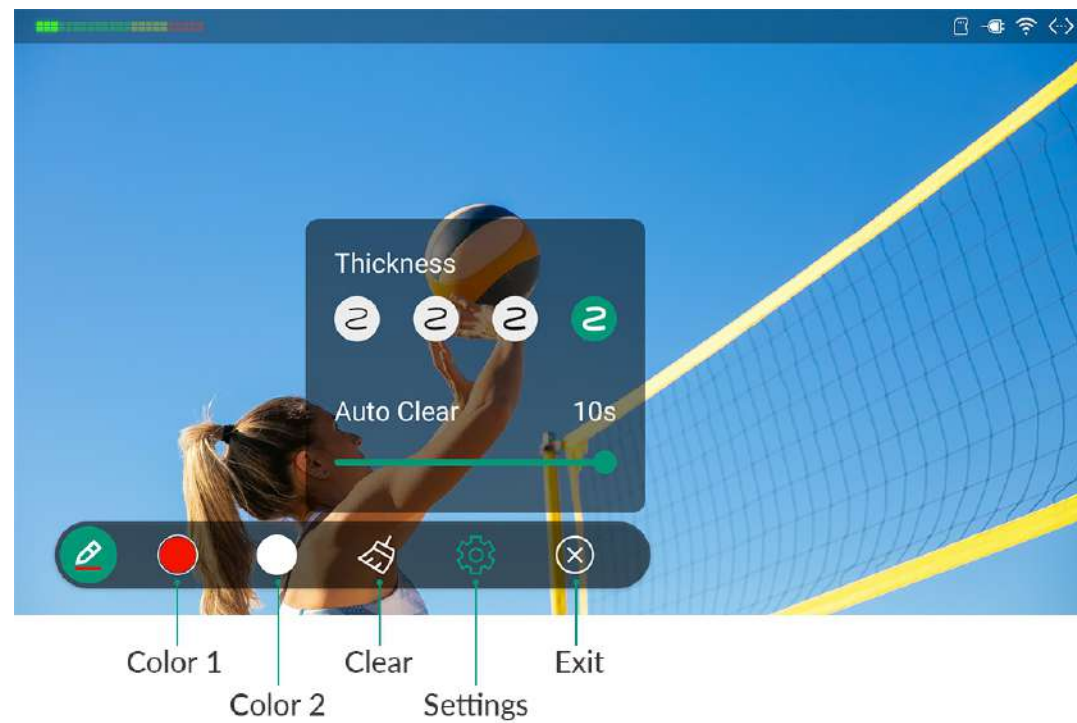

Delete GFX


1. Tap **GFX** to open the **GFX** list.
2. Long-press one **GFX** thumbnail.
3. Tap **Delete**, and then confirm to delete in the popup.



Use Pen

Director Mini provides the **Pen** to annotate on your show.

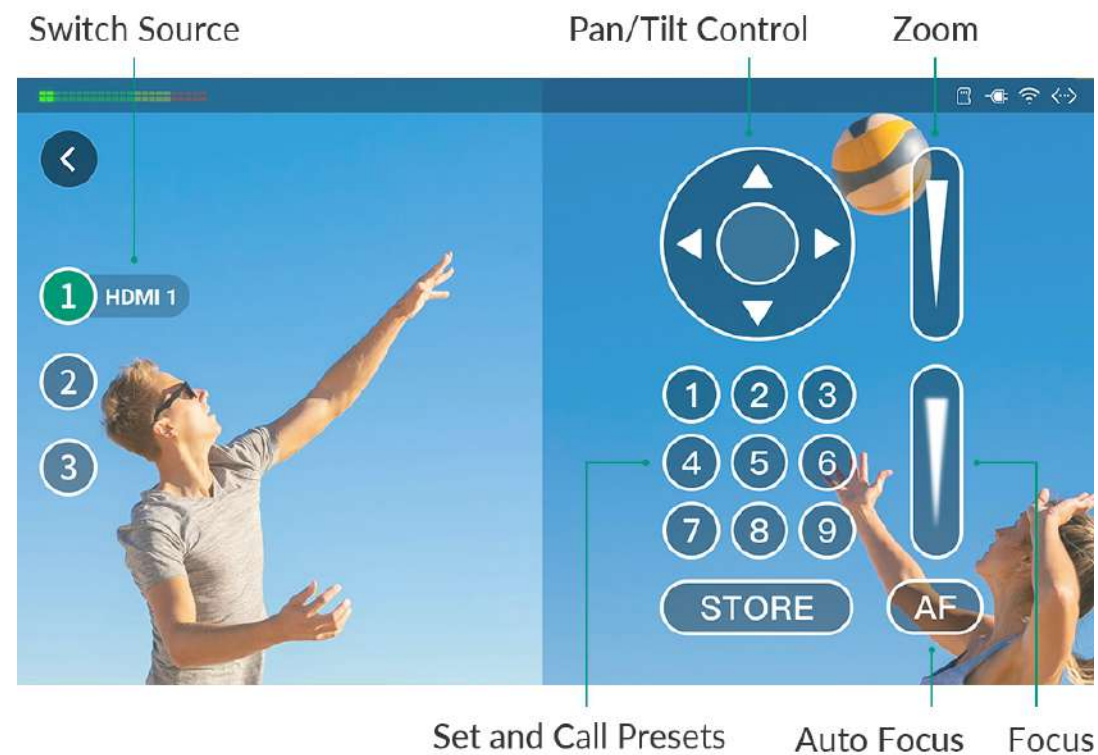

1. Tap  to enter the annotation mode.
2. Draw or write on the screen to annotate.
3. Tap  to expand the toolbar. To collapse, tap  again.
 - Tap **Color 1** or **Color 2** to switch the pen color, and tap **Color 1** or **Color 2** again to set color for each.
 - Tap  to clear the annotations.
 - Tap  for more advanced settings.
 - Select the pen thickness.
 - Drag the slider of **Auto Clear** to define the time for each annotation to remain on the screen. The default time is 5 seconds. The range is 0-10s. 0 indicates that the annotation will not disappear unless you manually clear it.
 - Tap  to exit the annotation mode. When you exit, all the annotations will disappear.



PTZ Control

When a source supports UDP-based or NDI-based PTZ function, you can control the PTZ camera.

You can enter the PTZ control mode through the following ways, by which you can also enter phone camera control mode.

- Tap , which only applies to the Program and Preview scenes.
- Long-press a scene thumbnail, and select **PTZ Control**.
- If there are multiple PTZ sources or phone camera sources in the scene, select a source on the popup. After that, you can tap the numbers on the left (at the bottom for portrait mode) to switch sources.
- Long-press any blank area on the PTZ control panel and drag it to the desired position.
- For a program or preview scene, tap X to exit the control mode.
- For other scene, tap  to cut back to the live program or preview.

Pan/Tilt Control

- On the Pan/Tilt Control panel, tap the center of the circle and slide your finger across the screen to move the camera. The closer to the center of the circle, the slower the camera moves; The farther away from the center of the circle, the faster the camera moves.
- Long-press the arrows to pan/tilt the camera.

Zoom

Slide on the slide bar at the upper right to zoom.

- Slide up, and the lens zooms in.
- Slide down, and the lens zooms out.

Focus


Slide on the slide bar at the lower right to focus.

- Slide up, and then the lens focuses near and the nearby object gets clear.
- Slide down, and then the lens focuses far and the distant object gets clear.

You can also tap  for auto focus.

Presets

A preset is a predefined image position which contains information of pan, tilt, zoom, etc. After the preset is configured, you can move the camera to your desired position quickly by calling the preset.

1. Move the camera to your desired position and adjust zoom and focus.
2. Tap  and then tap a number to save. For example, if you tap No.1, it will be saved as Preset 1.
3. Repeat the steps above to add more presets.
4. Tap a preset No. to call the preset.

It supports to add up to 9 presets.




Control OBSBOT WEBCAM

Director Mini is compatible with OBSBOT WEBCAMs. Besides [Pan/Tilt Control](#), [Zoom](#), [Focus](#), and [Presets](#), the PTZ control panel for OBSBOT supports the following features.

For OBSBOT webcam, it supports adding up to 3 presets, and the preset numbers change to P1, P2 and P3.

AI Human Tracking

1. Tap  to open the setting page.
 - Set tracking speed. Options may change with OBSBOT webcam modules.
 - Set tracking mode. Options may change with OBSBOT webcam modules.
2. Toggle on the switch of AI Human Tracking to start.
3. Toggle off the switch of AI Human Tracking to stop.

Record

If your OBSBOT webcam supports recording, such as OBSBOT Tail Air, you can record videos to the SD card installed in the webcam.

- Tap **Record** to start recording.
- Tap **Recording** to stop.

Reset

Tap  to reset the OBSBOT webcam to its initial position.




Wake Up

If the OBSBOT webcam has gone to sleep, such as OBSBOT Tiny 2, tap **Wake Up** to bring it back to work.




Control Phone Camera

When a scene contains a phone camera source, you can control phone camera to zoom or focus on device.





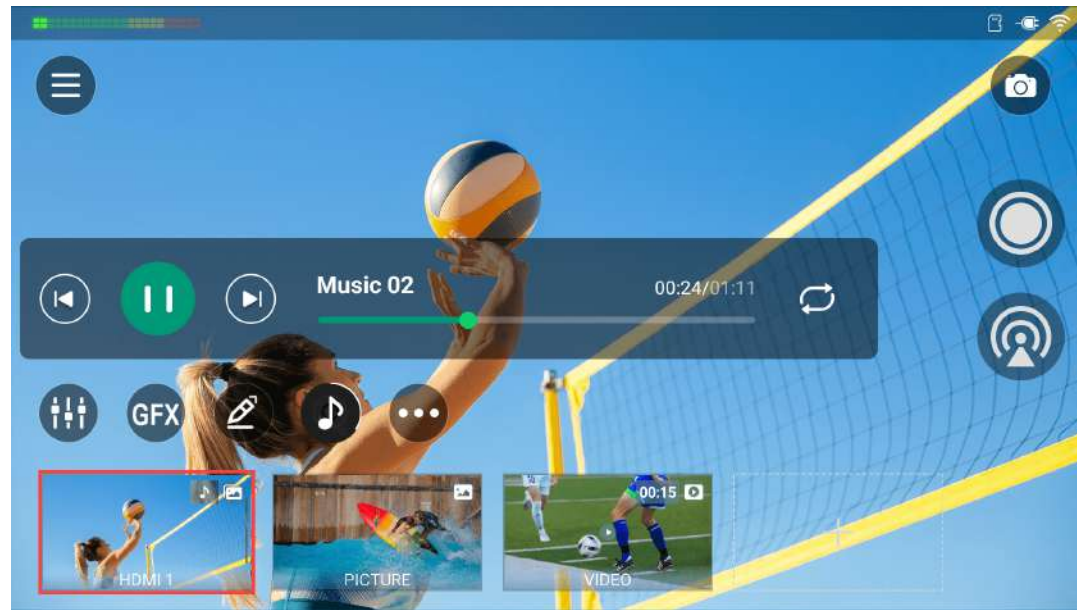



1. Enter phone camera control mode through the following ways, by which you can also enter the PTZ control mode.
 - Tap , which only applies to the Program and Preview scenes.
 - Long-press a scene thumbnail, and select **PTZ Control**.
 - If there are multiple PTZ sources or phone camera sources in the scene, select a source on the popup. After that, you can tap the numbers on the left (at the bottom for portrait mode) to switch sources.
2. Drag  on the screen to control the phone camera to zoom in or out.
3. Tap a place on the phone camera image to focus.
4. Tap and hold on a part of the screen for a few seconds to enable AE/AF lock. A yellow box will appear on the phone screen, and the focus is locked on that part. It will remain locked until you tap on another part of the screen.
5. For a program or preview scene, tap X to exit the control mode.
6. For other scene, tap  to cut back to the live program or preview.


For some phones, they may not support the focus function due to their own limitation.




Control BGM

After you have added background music to a scene, the BGM icon will be displayed on the scene thumbnail and main screen. You can control the playback of the background music.

1. On the screen, tap a scene thumbnail with the BGM icon.
2. Tap  to reveal the BGM playback bar.
3. Tap the buttons on the playback bar to control the BGM playback.
 - Tap  to play or  to pause.
 - Tap  to play the previous song or  to play the next song.
 - Drag the playhead to a specified position.
 - Set the loop policy:
 -  : Repeat the playlist
 -  : Repeat the song
 -  : Shuffle the playlist

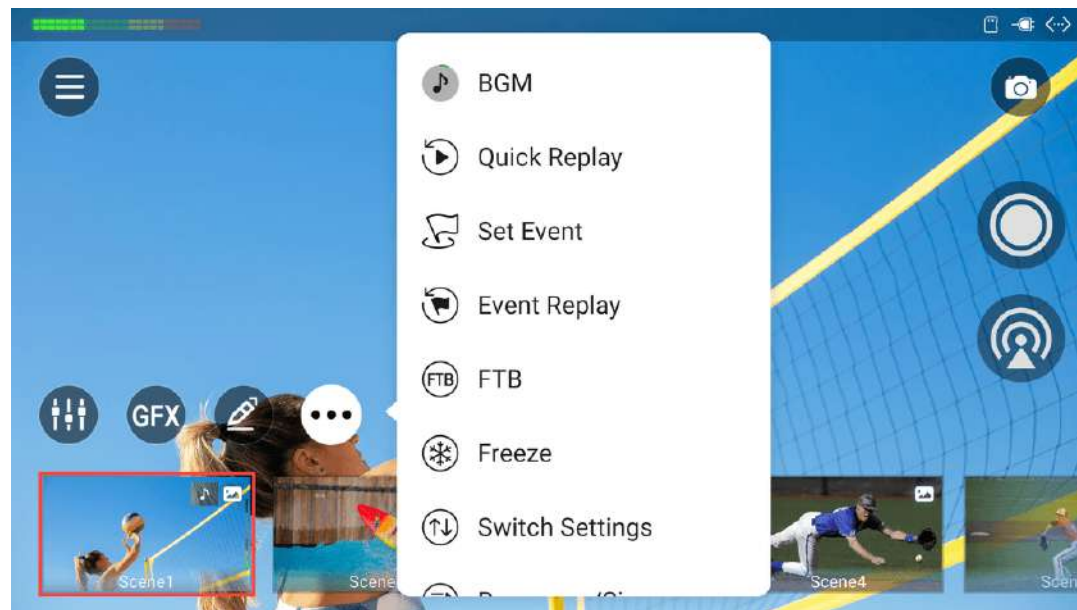



Replay

Replay allows you capture some of greatest moments, slow down the action and save your highlights. You can go to  > Settings > Replay to enable and set the function. Please refer to [Replay](#).





Quick Replay

Tap  **Quick Replay** to review the recent live content.

- If you have set **Duration of quick replay** to a specific duration in  > "Settings" > "Replay", it will directly enter the replay mode.
- If you have set **Duration of quick replay** to "Ask me when replay starts" in  > "Settings" > "Replay", select the duration in the popup window, and then it enters the replay mode.


Event Replay

You can also save events during live program, and replay the events later.

1. Double tap on the main screen to set an event, or tap  **Set Event**.
 - If you have set **Duration of event replay** to a specific duration in  > "Settings" > "Replay", it will directly save the event.
 - If you have set **Duration of event replay** to "Ask me when setting" in  > "Settings" > "Replay", select the duration in the popup window, and then it save the event.
2. Repeat Step 1 to set more events.
3. Tap  **Event Replay**.
 - If only one event is set, it starts replay directly.

- If there are multiple events, select an event thumbnail from the event list on the popup to enter the replay mode.



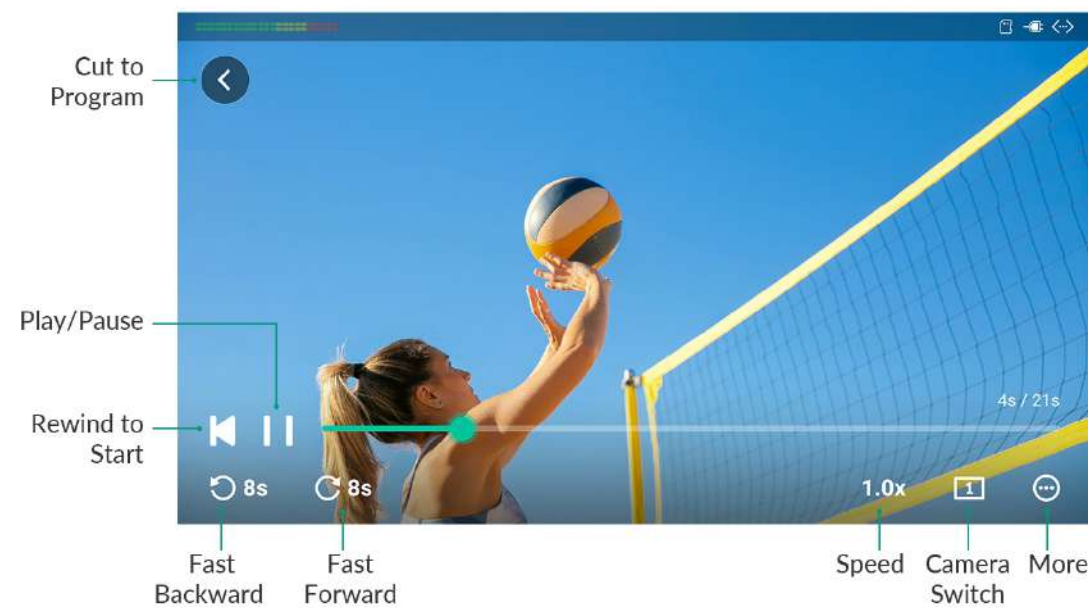


If you switch shows or reboot the device, the event list of current show will be cleared.




Control Replay

After entering the replay mode, you can perform the following operations.

- Drag the playhead of progress bar to adjust the progress.
- Tap **⏮** to rewind to the start.
- Tap **▶** or **⏸** to play or pause the replay.
- Zoom in the image:
 - Double tap one position on the screen to zoom in the image to 2x.
 - Stretch with two fingers to zoom in. The maximum zoom range is 8x.
 - Drag the image to change the displayed area.
 - To exit, double tap the screen again or pinch with two fingers to zoom out to the original size.
- Tap **⏮** or **⏭** to fast backward or forward at a faster pace, such as 5s, which is set in [Replay](#).
- Tap the speed button to change the playback rate. Options include 0.1x, 0.25x, 0.33x, 0.5x, 0.75x, and 1.0x (default).
- Tap the camera switch button to switch the replay image.
 - **1**: Camera 1
 - **2**: Camera 2

- **12**: Camera 1 and 2 in side-by-side layout
- Tap  for more features.
 - **Save event**: save the content of quick replay to the Album.
 - **Start annotate**: tap to start annotating on the main screen.
 - Tap  to expand the toolbar, and refer to [Use Pen](#) for details.
 - When the image is zoomed in, tap  to switch to Move mode, and then you can move the image. Tap  to switch back to Annotation mode.
 - **Mute/Unmute sound**: tap to mute or unmute the sound of replay.
- Tap blank area to hide the progress bar and buttons, and tap again to bring them back.
- Tap  to cut back to the live program.

View Saved Events

To view saved events, please go to  > [Album](#). The saved event is assigned in the format of "prefix_number sequence_source_REPLAY1/2.file extension".


- Prefix: the file name prefix set in [Record](#).
- Number sequence: it returns to the start of the number sequence (0001 for the file) each time you reset the device.
- Source: the recording source, which can be PGM, HDMI1, HDMI2, WEBCAM1, WEBCAM2 or NDI.
- REPLAY1/2: indicating replay camera 1 or 2.
- File extension: set in [Record](#), which can be MP4 or MOV.

Start Streaming and Recording

Director Mini can stream to multiple platforms, and supports recording the show for later use. You can stream and record separately or simultaneously, and implement interactive operations to attract your audience.


Live Streaming

You can stream to two platforms with different encoding formats at the same time. It natively supports streaming to YouTube, Twitch, and Facebook live, and also supports streaming via [RTMP](#) or [SRT](#). Besides, it supports two-channel NDI[®] HX3 streaming.

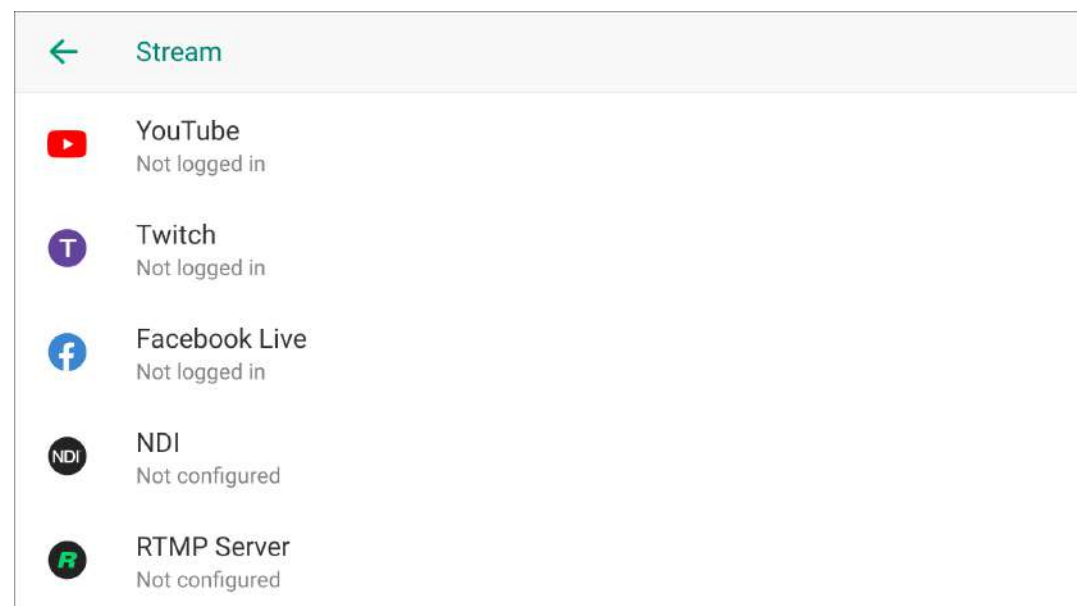





Configure Streaming Server

Before streaming your show, you need to configure the destinations you want to stream to.

To configure a server, please tap  > **Settings** > **Stream** to open the stream setting page, and then select a server.

Then follow the steps below to configure the streaming server.

 If no Quick Stream is enabled for any server, you can also tap  on the main screen and then select a server to enter its configuration page.

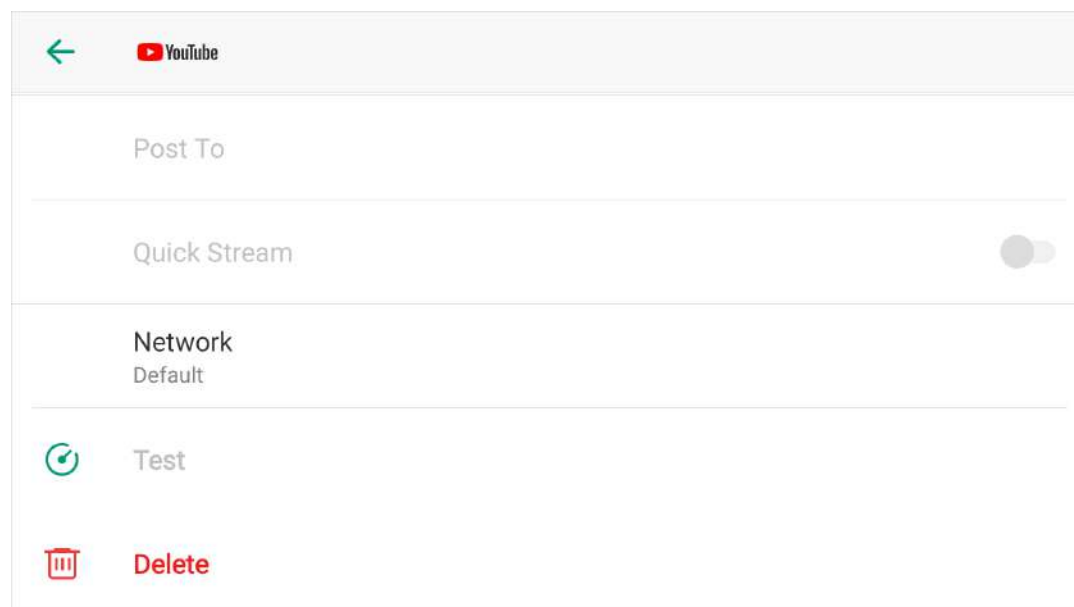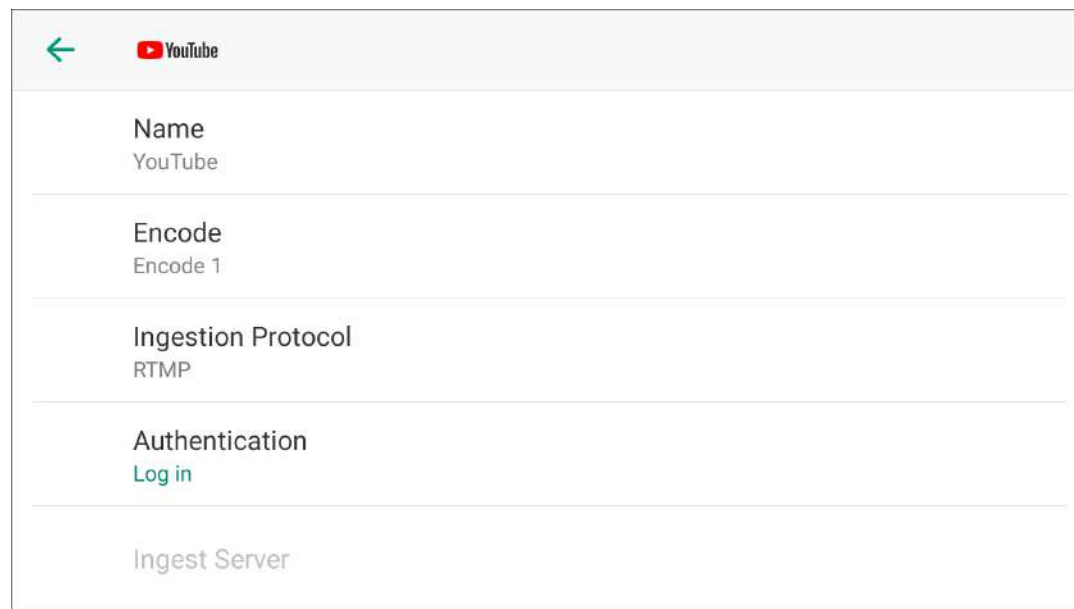

Configure YouTube Server

1. Select **YouTube** in the stream setting page.
2. Tap **Name** to enter an alias name for your convenience of multi-item management.
3. Tap **Encode**, and select a stream scheme.

You can customize encode parameters and sources as needed. For details, please refer to [Encode](#).


4. Tap **Ingestion Protocol** to select [RTMP](#) or HLS.
5. Tap **Log In** under **Authentication**, and then follow the instructions to log into your account.



Your username and profile image will be displayed after login.

Your nickname, user avatar images and authorization token will be stored encrypted in Director Mini device after a successful authorization. When you [delete the YouTube server](#) or remove Director Mini from trusted apps from your [Google account's security setting](#), we will follow the policies of Google to clear saved data in 0 to 24 hours.

If you have not enabled live streaming for your YouTube account, your YouTube login will fail. Also note that you need to have live streaming enabled 24 hours before starting streaming. For details, see [Why can't I log in to my YouTube account](#).

6. Set the **Ingest Server**.
You can select **Primary server (rtmp)**, **Primary server (rtmps)**, **Backup server (rtmp)**, or **Backup server (rtmps)**.


7. Tap **Post to**, and select a channel, event, or **New stream**.
If you select **New stream**, you need to set **Title** (mandatory), **Description**, and **Privacy**.
 - **Privacy** options are:
 - **Public**: The stream is visible to all people.
 - **Private**: The stream is visible only to you and people selected by you.
 - **Unlisted**: The stream is visible only through a link.
8. (Optional) Tap on **Quick Stream**. When it is enabled, you can start streaming quickly on the main screen.
9. Tap **Network** to set the network priority for streaming. Options include:
 - **Default**: The system's default network priority, that is Ethernet > WLAN > Cellular.
 - **Cellular First**
 - **WLAN First**
 - **Ethernet First**
10. Tap **Test** to test whether the previous configurations are working properly.
11. Tap  to return to the previous menu.

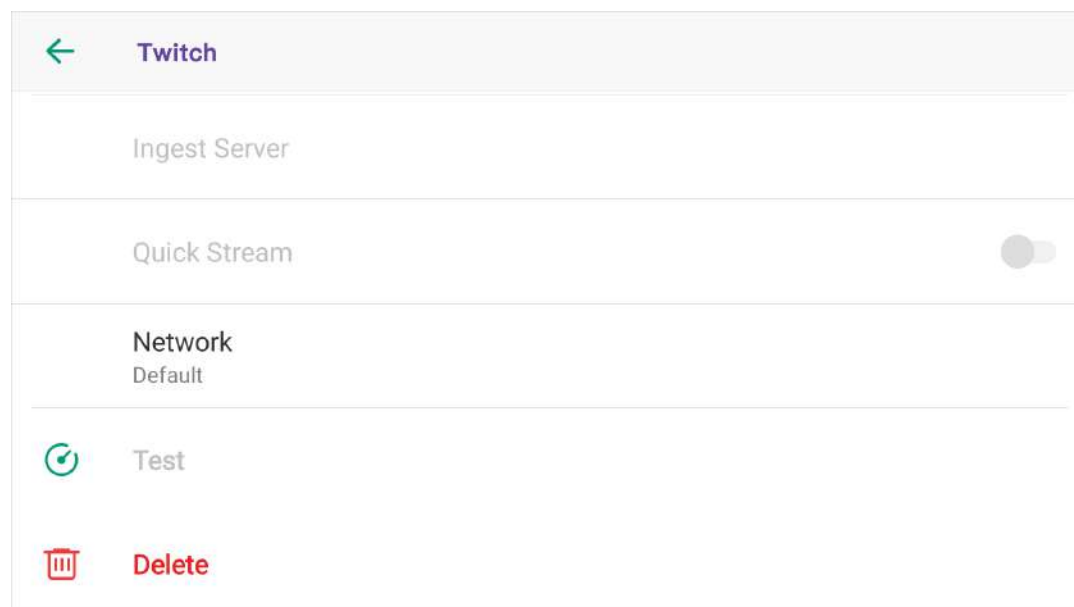
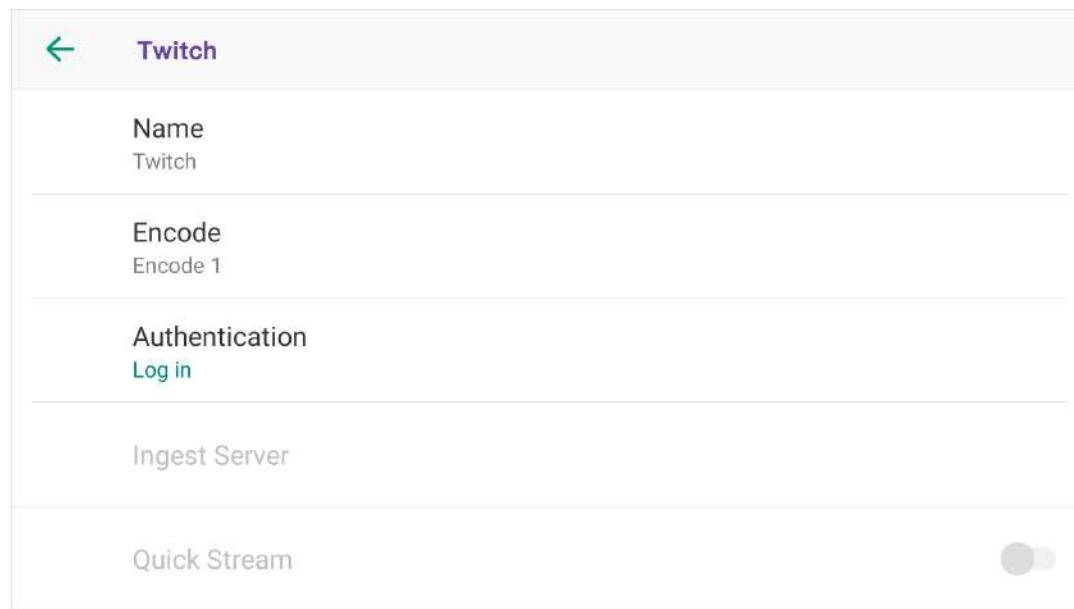


Configure Twitch Server

1. Select **Twitch** in the stream setting page.
2. Tap **Name** to enter an alias name for your convenience of multi-item management.
3. Tap **Encode**, and select a stream scheme.

You can customize encode parameters and sources as needed. For details, please refer to [Encode](#).

4. Tap **Log In** under **Authentication**, and then follow the instructions to log into your account.
5. Set the **Ingest Server**.
The system lists available servers. You can select a nearby server for an optimal network path.
6. (Optional) Toggle on **Quick Stream**. When it is enabled, you can start streaming quickly on the main screen.
7. Tap **Network** to set the network priority for streaming. Options include:
 - Default: The system's default network priority, that is Ethernet > WLAN > Cellular.
 - Cellular First
 - WLAN First
 - Ethernet First
8. Tap **Test** to test whether the previous configurations are working properly.
9. Tap  to return to the previous menu.

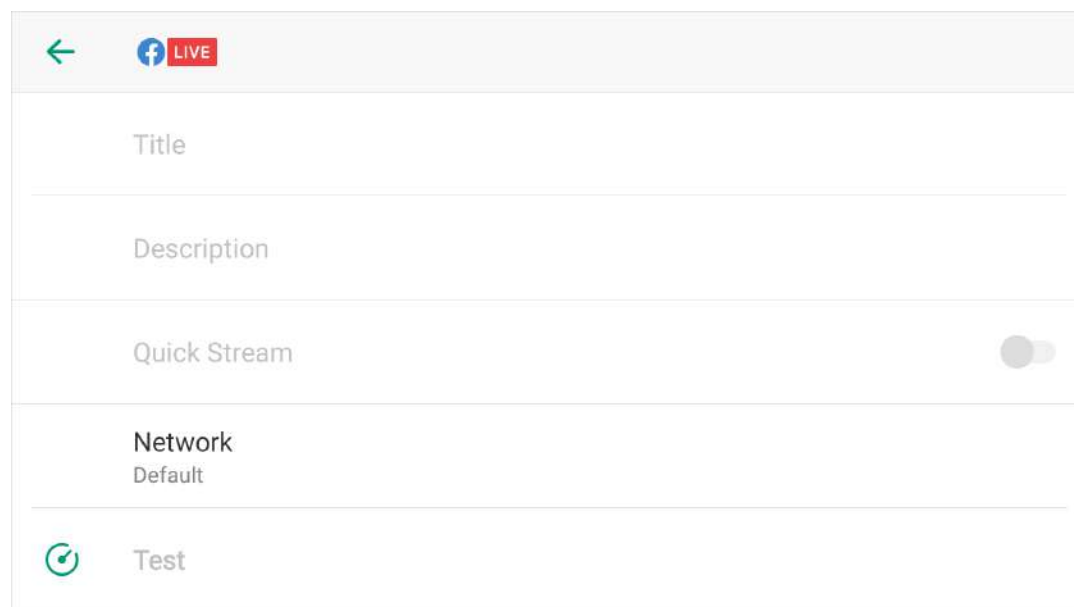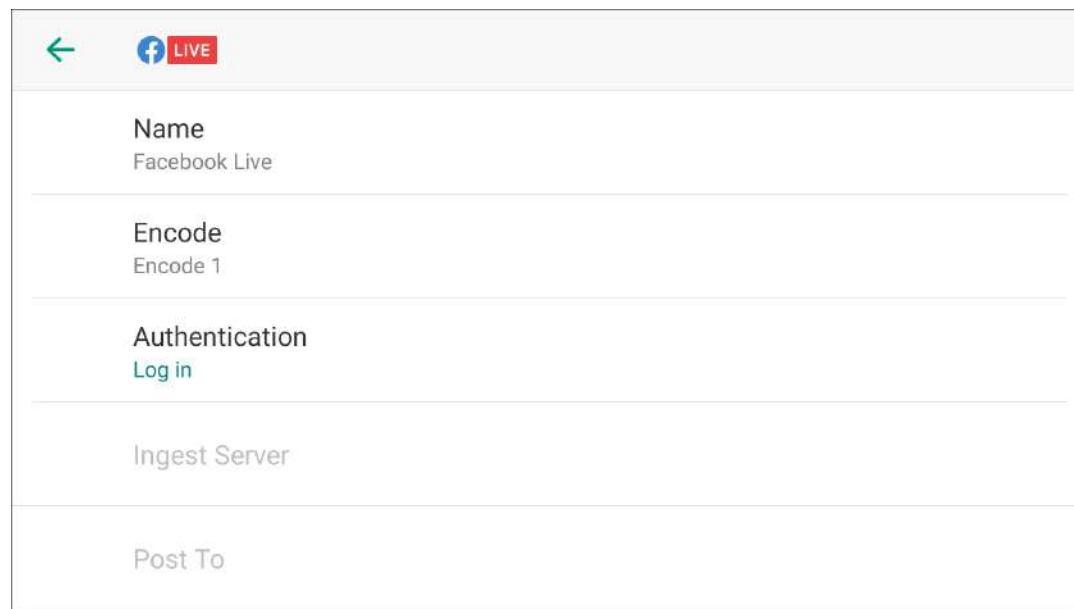

Configure Facebook Live Server


1. Select **Facebook** in the stream setting page.
2. Tap **Name** to enter an alias name for your convenience of multi-item management.
3. Tap **Encode**, and select a stream scheme.

You can customize encode parameters and sources as needed. For details, please refer to [Encode](#).

4. Tap **Log In** under **Authentication**, and then follow the instructions to log into your account.
Your username and profile image will be displayed after login.
Your nickname, user avatar images and authorization token will be stored encrypted in Director Mini device after a successful authorization. To delete your information, you can [delete the created server](#) or you can remove Director Mini from trusted apps from [Facebook](#). Your personal data will be deleted upon request in 0 to 24 hours.
After you log in successfully, the system automatically selects a ingest server for you, which you cannot change.
5. Tap **Post to** to access the list of Timeline and Page, and then select Timeline or a Page as the streaming destination.
6. (Optional) Set **Title** and **Description**.

Title supports a maximum of 255 bytes.

7. (Optional) Toggle on **Quick Stream**. When it is enabled, you can start streaming quickly on the main screen.

8. Tap **Network** to set the network priority for streaming. Options include:
 - Default: The system's default network priority, that is Ethernet > WLAN > Cellular.
 - Cellular First
 - WLAN First
 - Ethernet First
9. Tap **Test** to test whether the previous configurations are working properly.
10. Tap  to return to the previous menu.

← **NDI**

Alias
NDI

Source Name

Group Name
public

Encoding Source
Program

Program Stream
H.264, 1080p, 60 fps, 62.0 Mbps


← **NDI**

Preview Stream
360p, 30 fps, 3.0 Mbps

Transport Mode
TCP (Uni-connection)

Discovery Server

Failover

 Test

Configure NDI[®] Server

1. Select **NDI[®]** in the stream setting page.
2. Tap **Alias** to enter an alias name for your convenience of multi-item management.
3. Tap **Source Name** to enter a name, which is the name of the output NDI[®] stream for the receiver to recognize. It supports 1-30 characters, which contain A-Z, a-z, 0-9 and _-#()%.
4. Tap **Group Name** to enter a name to specify the client group receiving the NDI[®] stream. It supports 1-64 characters, contain A-Z, a-z, 0-9 and _-,. Multiple group names can be comma-separated. The default group name is public. If you do not want other devices on the network to be able to search for it at will, you can set a private group name, and other devices need to use the private group name to search for this device.
5. Tap **Encoding Source** to select the source to encode. Options include Program, HDMI 1, HDMI 2, Webcam 1 and Webcam 2.
6. Tap **Program Stream** to set the following parameters.
 - **Codec:** Options include H.264 and H.265.
 - **Resolution:** Options include 640x360, 960x540, 1280x720, 1920x1080.
 - **FPS:** Options change along with the frame rate of the show, which can be 60/59.94/50/30/29.97/25/24/23.98/15 fps.
 - **Bitrate:** It automatically changes according to resolution and FPS options.
 - **Profile:** Options include Baseline Profile, Main Profile, High Profile.
 - **Bitrate Mode:** It is fixed at **CBR**.

7. Tap **Preview Stream** to set the following parameters.
 - **Resolution:** It is fixed at 640x360.
 - **FPS:** It changes along with the frame rate of the show.
 - **Bitrate:** It automatically changes according to the settings of Program Stream.
 - **Profile:** Options include Baseline Profile, Main Profile, High Profile.
 - **Bitrate Mode:** It is fixed at **CBR**.
8. Tap **Transport Mode**, select a mode and set parameters if needed.
 - **UDP (Unicast):** The device sends a UDP stream directly to the receiver. It is used where lower latency matters. And multiple simultaneous streams will work independently for multiple receivers.
 - **UDP (Multicast):** The device sends the UDP stream to a multicast group. It is used for one-to-many broadcast for lower CPU usage. Parameters in a multicast configuration include:
 - **Multicast IP:** IP ranges from 224.0.0.0 to 239.255.255.255.
 - **Subnet Mask:** The legitimate value ranges from 255.0.0.0 to 255.255.255.252.
 - **Time to live:** It ranges from 1 to 255. The default value is 4.
 - **RUDP (Unicast):** Reliable User Datagram Protocol, is a connection-oriented and unicast protocol. RUDP helps to maintain the flow control and reliability of data transfer. The transmission control algorithms on both sending and receiving sides guarantee the RUDP capable of recovering from data loss, duplication, delay and reordering.
 - **TCP (Uni-Connection):** It indicates to establish single TCP connection

between the device and the receiver, and transfer all A/V packets via one port. Compared with UDP (Unicast) or TCP (Multi-Connection), it has lower CPU usage. It is used where reliable data transfer matters, which makes it suitable for 4K NDI streams.


- **TCP (Multi-Connection):** It indicates to establish multiple TCP connections between the device and receivers, but transfer audio packet and video packet via different ports. It usually works in a complicated networking studio. It is used where reliable transmission of data matters, which makes it suitable for 4K NDI streams.

9. (Optional) Toggle on **Discovery Server**, and then the device can only be received by the specified receiver, and the mDNS auto-discovery function is unavailable.

- i. Ensure that the receiver and device can ping each other.
This function works between device and receiver that can ping each other even from differential network segment. After setting, the output stream of your device can be received by specified server.
- ii. Specify the **Server IP** to the IP address of the discovery server.
- iii. Launch the **NDI Access Manager** tool installed in the reception computer, enter the **Advanced** tab, uncheck **Multicast Sending Enabled** , and check **Use Discovery Server**, and then specify **Server IP** to the IP address of the receiver server running discovery service function.

Note: The Server IP of NDI Access Manager and Director device should be the same.

Download the NDI Access Manager from the NewTek official site www.newtek.com/ndi/tools for free.

10. (Optional) Toggle on **Failover** to protect your NDI transmission from failure. If the source video fails, the backup device begins to provide a service. The initial source will be restored after it recovers.
 - **Source name** shows the backup NDI channel name.
Tap **Change** and select the failover (backup) video device within the same NDI group as the initial source.
 - **IP address** shows the IP Address of the backup NDI channel, which is automatically obtained after you select the backup NDI source.
11. Tap **Test** to test whether the previous configurations are working properly.
12. Tap  to return to the previous menu.

← **RTMP**

Name
RTMP Server

Encode
Encode 1

URL

Stream Key

Authentication

← **RTMP**

Authentication

Quick Stream

Network
Default

Test

Delete

Configure RTMP Server

1. Select **RTMP** in the stream setting page.
2. Tap **Name** to enter an alias name for your convenience of multi-item management.
3. Tap **Encode**, and select a stream scheme.

You can customize encode parameters and sources as needed. For details, please refer to [Encode](#).
4. Tap **URL**, and enter the URL of the stream destination. It supports **RTMP** and RTMPS.
5. Tap **Stream Key**, and enter the key got from the stream destination.
6. (Optional) Turn on **Authentication** if needed, and then enter your **Username** and **Password** at the third-party live streaming platform.
7. (Optional) Toggle on **Quick Stream**. When it is enabled, you can start streaming quickly on the main screen.
8. Tap **Network** to set the network priority for streaming. Options include:
 - Default: The system's default network priority, that is Ethernet > WLAN > Cellular.
 - Cellular First
 - WLAN First
 - Ethernet First
9. Tap **Test** to test whether the previous configurations are working properly.
10. Tap to return to the previous menu.

← **SRT**

Name
SRT Caller

Encode
Encode 1

Address

Port

Stream ID

← **SRT**

Latency
120ms

Encryption

Quick Stream

Network
Default


🔄 **Test**


Configure SRT Caller

1. Select **SRT** in the stream setting page.
2. Tap **Name** to enter an alias name for your convenience of multi-item management.
3. Tap **Encode**, and select a stream scheme.

You can customize encode parameters and sources as needed. For details, please refer to [Encode](#).
4. Tap **Address**, and enter the address of receiver.
5. Tap **Port**, and enter the port number of receiver. Value ranges from 1 to 65535.
6. Tap **Stream ID**, and enter a custom ID, which can contain 0-256 characters.
7. Tap **Latency**, enter a number between 20 and 8000. The default value is 120ms. We recommend that the latency is configured the same as that of the receiver.
8. (Optional) Toggle on **Encryption**, and then select an encryption algorithm, which can be [AES 128](#), [AES 192](#) or [AES 256](#). And enter the Password, which can contain 10 to 79 characters.
9. (Optional) Toggle on **Quick Stream**. When it is enabled, you can start streaming quickly on the main screen.
10. Tap **Network** to set the network priority for streaming. Options include:
 - Default: The system's default network priority, that is Ethernet > WLAN > Cellular.
 - Cellular First

- WLAN First
- Ethernet First

11. Tap **Test** to test whether the previous configurations are working properly.
12. Tap  to return to the previous menu.

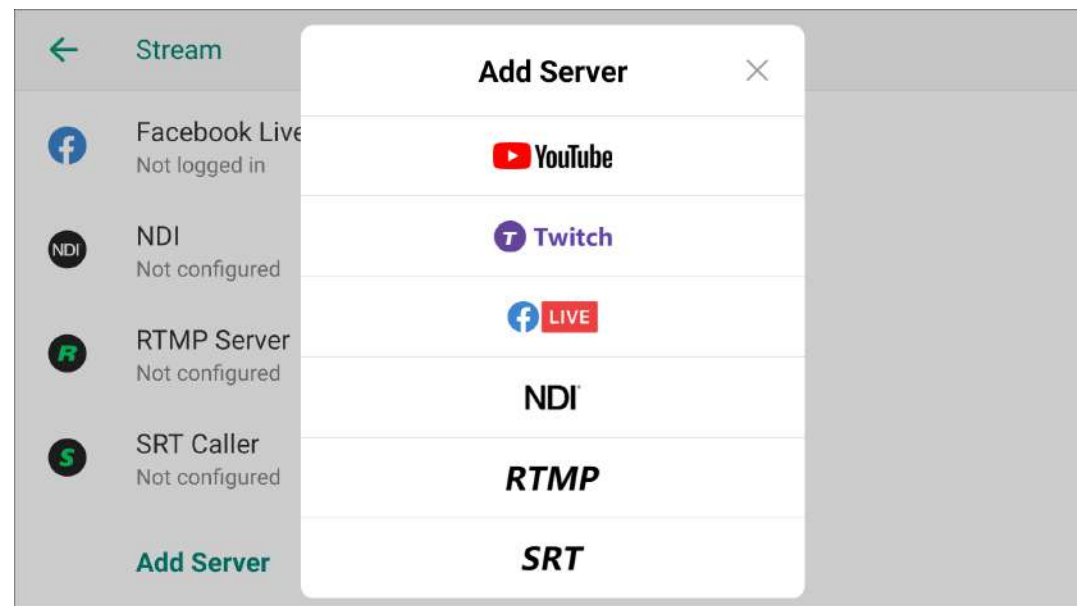


Add More Servers


1. Select **Add Server** in the stream setting page.
2. Select one server, and operate as the previous steps.

Edit Server

1. Tap a sever in the stream setting page.
2. Modify the server's properties.

Delete Server

- In the stream setting page, swipe a server to the left, and then tap .
- Or tap a server to enter its configuration page, and then tap **Delete** at the bottom.

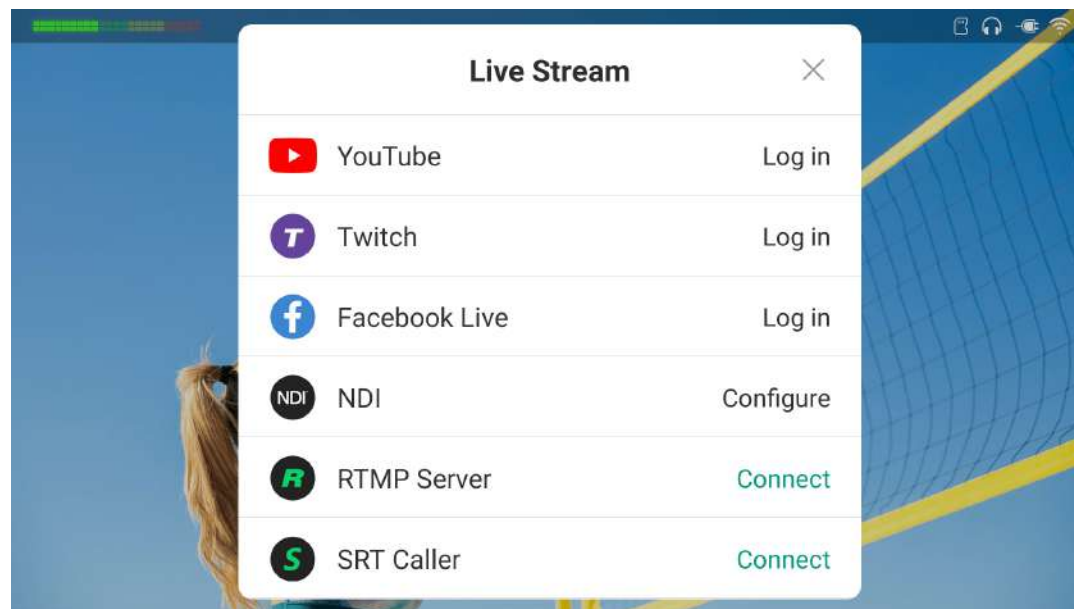


Start Live Streaming

Director Mini supports streaming to two servers at the same time.


You can start live streaming through two methods: Manual Stream and Quick Stream. Manual Stream requires you to manually connect and stream to configured servers individually. Quick Stream allows you to specify up to two configured servers and quickly connect and stream to these servers at the same time.


Manual Stream

1. Ensure your Director Mini is connected to the Internet.
2. Ensure you have [configured streaming sever](#).
3. Start streaming:
 - a. Tap  on the main screen.
 - b. Tap **Connect** next to a configured server in the **Live Stream** window.




If you have not configured the server, tap the server, and it will go to the configuration page.

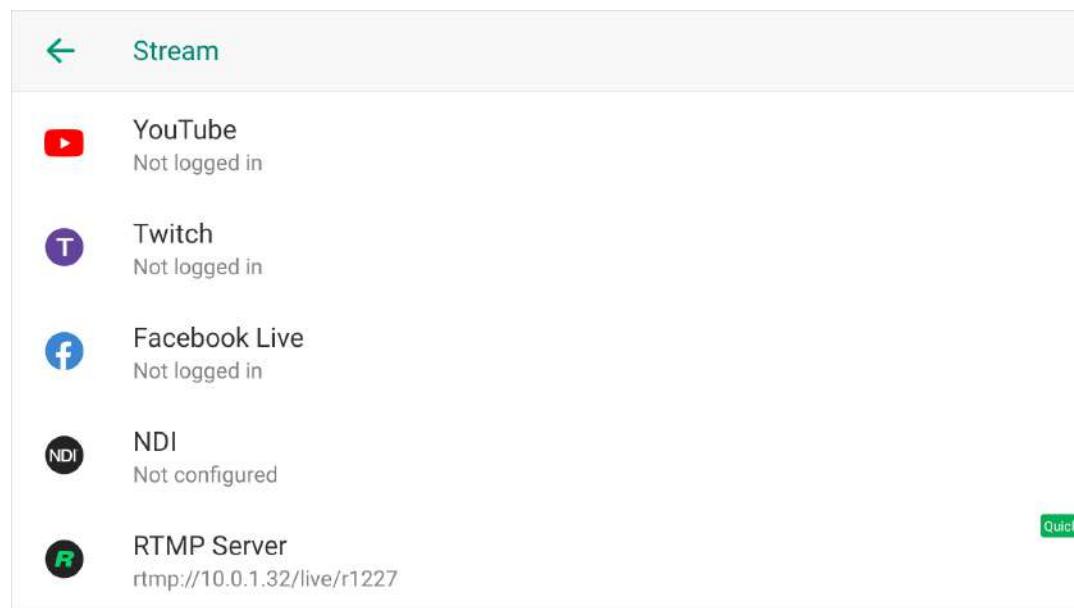- c. (Optional) Repeat the above steps to stream to another server at the same time.
 - The maximum number of servers you can simultaneously connect to is two. This limit is set to ensure stream performance.
 - If you have not configured any other server, you cannot stream to another server, and it will not go to the configuration page when you tapping another server.
4. Stop streaming:



- a. Tap  on the main screen.
- b. In the Live Stream window, tap **Disconnect** of a working server to stop streaming to the server.
- c. (Optional) Repeat the above steps to stop streaming to the other server.



Quick Stream

1. Ensure your Director Mini device is connected to the Internet.
2. Ensure you have turned on **Quick Stream** when you [configure streaming sever](#).
 - You can enable **Quick Stream** for two servers at most. This limit is set to ensure stream performance.
 - You can check which server is enabled with Quick Stream by tapping  > **Settings** > **Stream**, and the server is marked with "Auto".
3. Tap  on the main screen to start streaming.
4. Tap  on the main screen to stop streaming.

The NDI server does not support Quick Stream.


Technical tips for a successful stream event:

- Test your stream before you go live.
- Check your network connectivity and encoding settings.

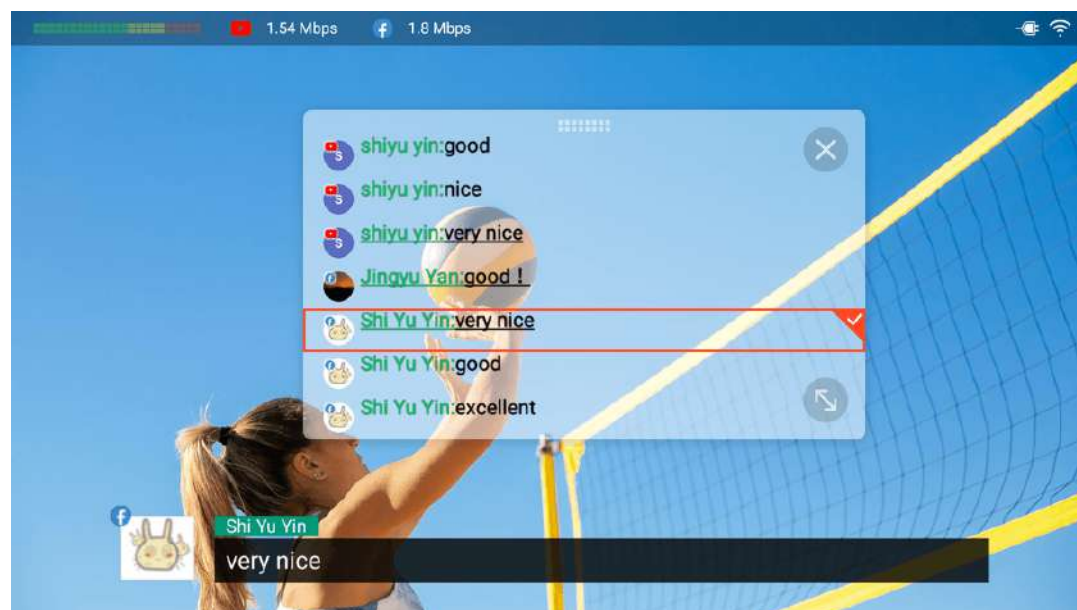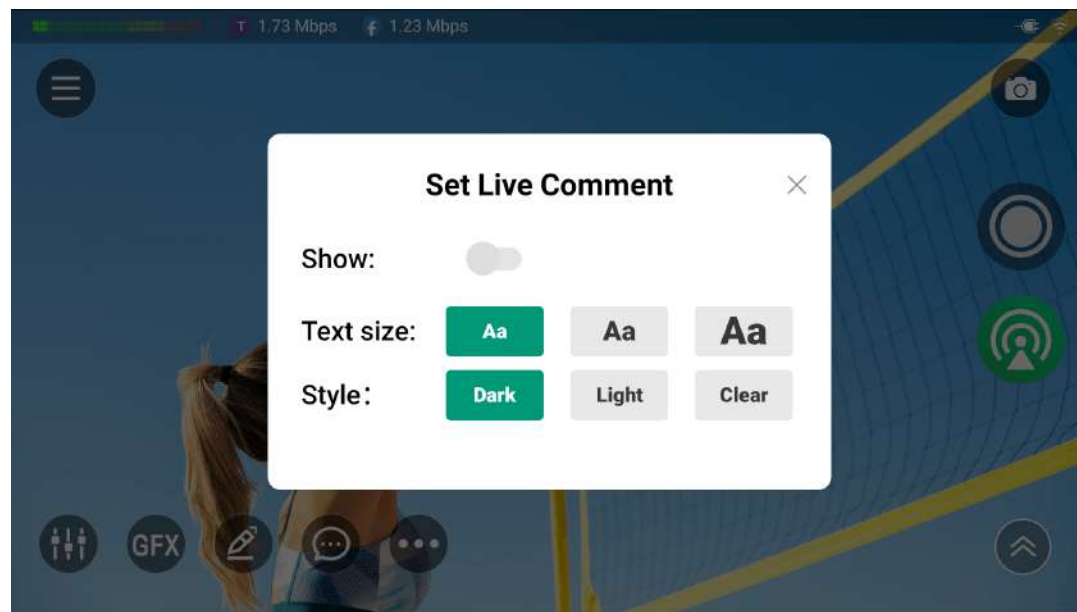


Live Comment

You can view live comments when streaming to YouTube, Twitch or Facebook, and select one comment as an overlay inside the video feed.

1. Tap  to set live comments.
2. Toggle on **Show** to display live comment box on the screen.
3. Set text size.
4. Set the style of comment box.
5. Tap "x" to go back to the main screen.



The comment box will display real-time comments in chronological order, and the icon of the platform will be displayed on the profile picture to mark it. You can send one comment as an overlay into the Program/Preview view.

- Long-press one comment to open the setting page.
 1. Tap the arrows to switch the overlay style.
 2. Tap the check box of **Auto Clear** and set the duration after which the comment automatically disappears.
 3. Tap **Send** to sent it as an overlay.
- Tap the overlay comment to cancel.
- Scroll up to view earlier comments, and scroll down to view the most current comments.
- Tap the top of comment box and drag it to the desired position.
- Drag  to scale it up and down.
- Tap "x" to close the comment box.

Record and Screenshot


You can record a show during live streaming or independently, and you can take screenshots at any time.

Director Mini supports isolated (ISO) recording. You can record two different sources simultaneously, or record two-channel images with different quality for one source.

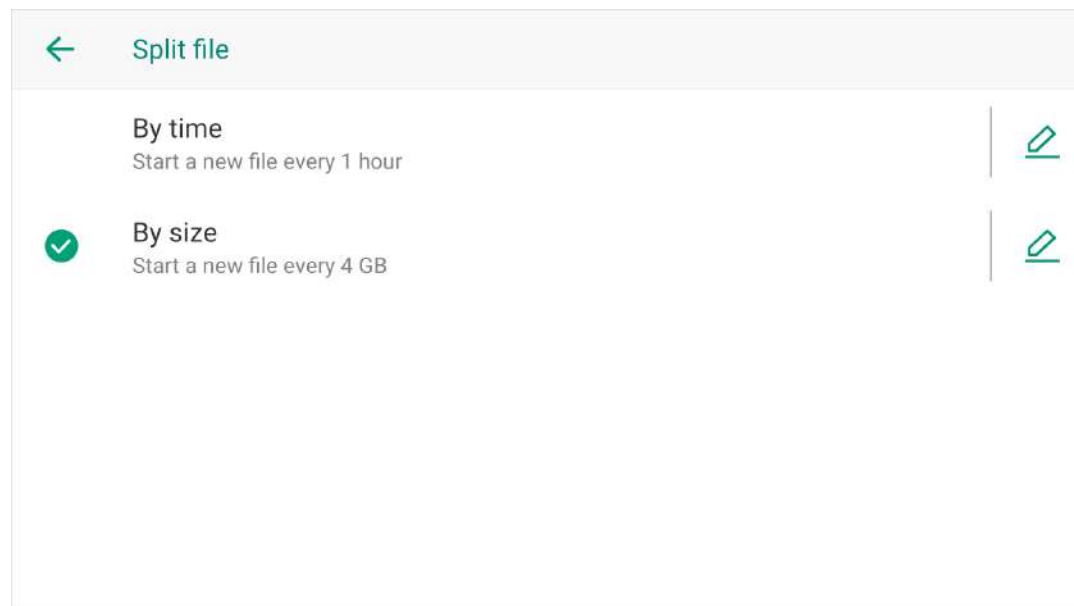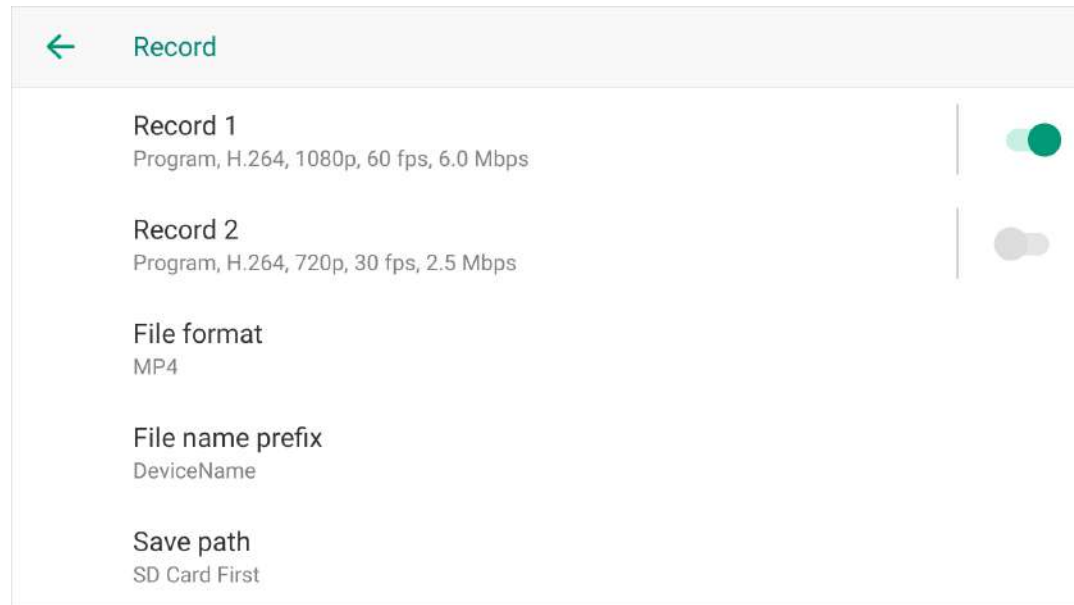

Set Recording Properties

Before recording, you may need to set recording properties. Otherwise, it will use the default settings to record.


1. Tap  > **Settings** > **Record**.
2. Tap **Record 1** or **Record 2** to select recording source. Options include Encode 1, Encode 2, or NDI source (if added to the show).

Encode 1 and **Encode 2** can be customized. For details, please refer to [Encode](#).
3. To enable ISO recording, please toggle on the switches of both **Record 1** and **Record 2**. If you only need to record one-channel image of one source, please toggle on one switch as needed.
4. Tap **File format** to set the format of recording file. Options include MP4 and MOV. By default, the format is MP4.
5. Tap **File name prefix**, and select a prefix type.
 - DeviceName
 - ShowName
 - DeviceName_ShowName
 - Self-defined name: tap **Add**, enter a name, and tap **Save**.

6. Tap **Save path**, and then select your preferred path, **Internal Storage First** or **SD Card First** (default).

You can also set storage path in [Storage](#).


7. Tap **Split file**, and then you can choose to split your recording file by time or by size. By default, it starts a new file every 4 GB.

- **By time:** start a new file by every x minutes or x hours. Tap  to set as your preference.

Options include 10 minutes, 20 minutes, 30 minutes, 1 hour, 1.5 hours, 2 hours and 4 hours.

The first file will start from the current time and end on the hour, and then the second file will start, so that it is more convenient for you to view your video clips. For example, when you choose to start a new file every 1 hour, if the first file starts at 8:30:03 am, it will end at 9:00:00 am. Then the second file will start at 9:00:00 am.



It also takes effect for x minutes. For example, when you choose to start a new file every 10 minutes, if the first file starts at 8:08:03 am, it will end at 8:10:00 am, and the second file will start at 8:10:00 am.

- **By size:** start a new file by every x MB or x GB. Tap  to set as your preference.

Options include 100 MB, 200 MB, 500 MB, 1 GB, 1.5 GB, 2 GB, 2.5 GB, 3 GB, 3.5 GB, 4 GB, 8 GB and 16 GB.

8. Tap  at the upper left corner to go back.

Start Recording

1. On the main screen, tap  to start recording.
2. Tap  to stop recording.

💡 When the recording time is less than 1s, the recording file will not be saved.

ISO recording does not support Full NDI source.

Take Screenshots

Tap  to take a screenshot.

Screenshots are saved as .PNG files in the internal storage by default. If you want to change the save path, please refer to [Storage](#).



Check Streaming/Recording Status

Recording status

Once you start recording, the recording status will be displayed on the status bar. It is marked by a flashing red dot, showing the recording duration. When the time left for record is less than 1 hour, it displays "Time left: xx:xx" in red text. For one-channel recording, it displays the encoding source if it is HDMI 1, HDMI 2, WEBCAM 1, WEBCAM 2 or NDI. If it is Program, it does not display. For two-channel recording, it displays both encoding sources, for example, PGM/PGM, PGM/HDMI 1, HDMI 1/2, or NDI 1/2.

When the remaining free space is insufficient, the device will stop recording automatically. The recording status disappears from the status bar.

Streaming status

Once you start streaming, the streaming status will be displayed on the status bar. It is marked by the logo of streaming server, showing the streaming rate. When you stream to two servers at the same time, it displays information of the two. If the encoding source is HDMI 1, HDMI 2, WEBCAM 1 or WEBCAM 2, it will also be displayed.

- **Orange streaming text:** The upload speed is not enough to support bandwidth.
- **Red streaming text:** Director Mini is trying to reconnect to the streaming server.

You can also view streaming status on the [Control Center](#).



NDI Tally


When you start NDI streaming, the top status bar supports displaying NDI Tally.

- When the streaming rate shows a red background, it indicates the NDI streaming signal is in PGM (Program) view.
- When the streaming rate shows a green background, it indicates the NDI streaming signal is in PVW (Preview) view.






Album

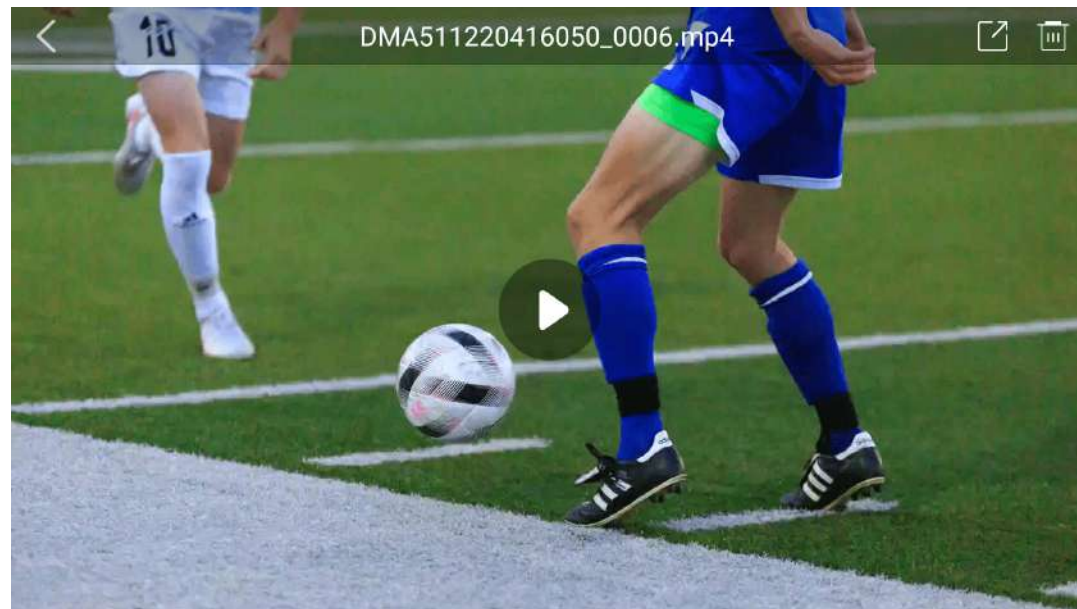The Album displays the screenshots you have taken or videos you have recorded which are stored in the internal storage or SD card, categorized into All, Video, and Image, and sorted by time.

In the album, you can preview, export, and delete the images or video clips.




Preview Video Clips & Images

1. Tap  > **Album** to open the Album.
2. Tap a video clip or an image to preview it in full screen.
3. While previewing, you can
 - Tap  or  in the upper right corner to export or delete the video or image.
 - Tap  to play the video, or tap the screen, and then tap the play or pause button to control video playback.
4. Tap  to go back.




When you preview the video clip, you can see the file name which is assigned in the format of "prefix_number sequence of recording_number sequence of split file_source_REC1/2.file extension".

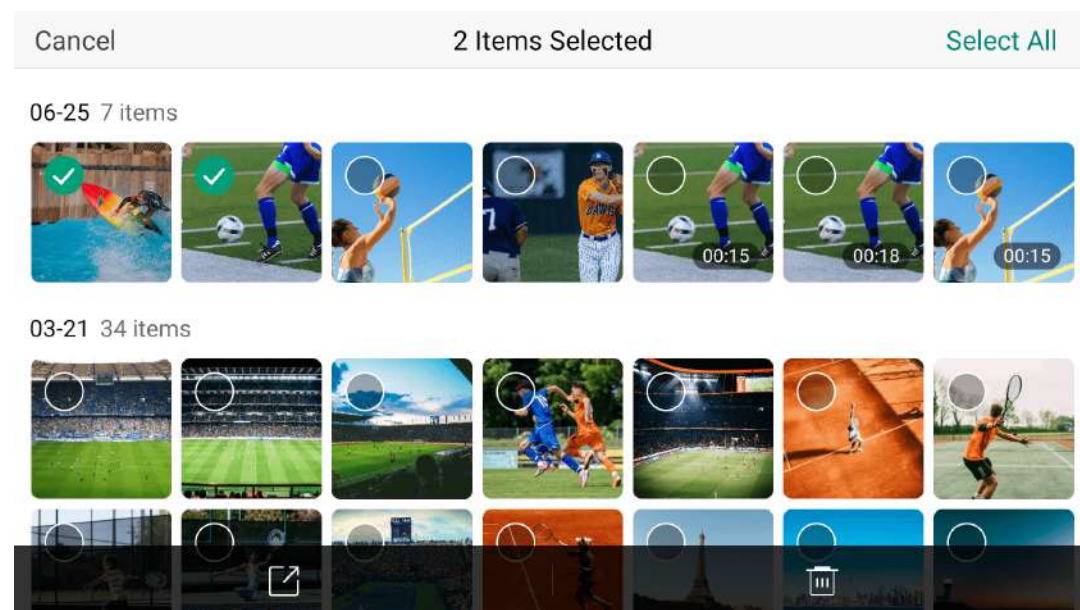- Prefix: the file name prefix set in [Record](#).
- Number sequence of recording: it returns to the start of the number sequence (0001 for the file) each time you reset the device.
- Number sequence of split file: for a long-time recording, files are split in number sequence. If no file is split, no such number.




- Source: the recording source, which can be PGM, HDMI1, HDMI2, WEBCAM1, WEBCAM2 or NDI.
- REC1/2: indicating Record 1 or Record 2.
- File extension: set in [Record](#), which can be MP4 or MOV.


Export or Delete Video Clips & Images

1. Tap  > **Album** to open the Album.
2. Tap **Select**, and then select some video clips and images.
3. Tap  at the bottom, then select USB or SD Card to export the selected items.
4. Or tap  at the bottom to delete the selected items.

If you export a file in the internal storage to the SD card, two same files will be displayed in the album.

Settings

Tap  > **Settings** to open the settings page, where you can customize the properties of the device, configure encode parameters, set audio, etc.

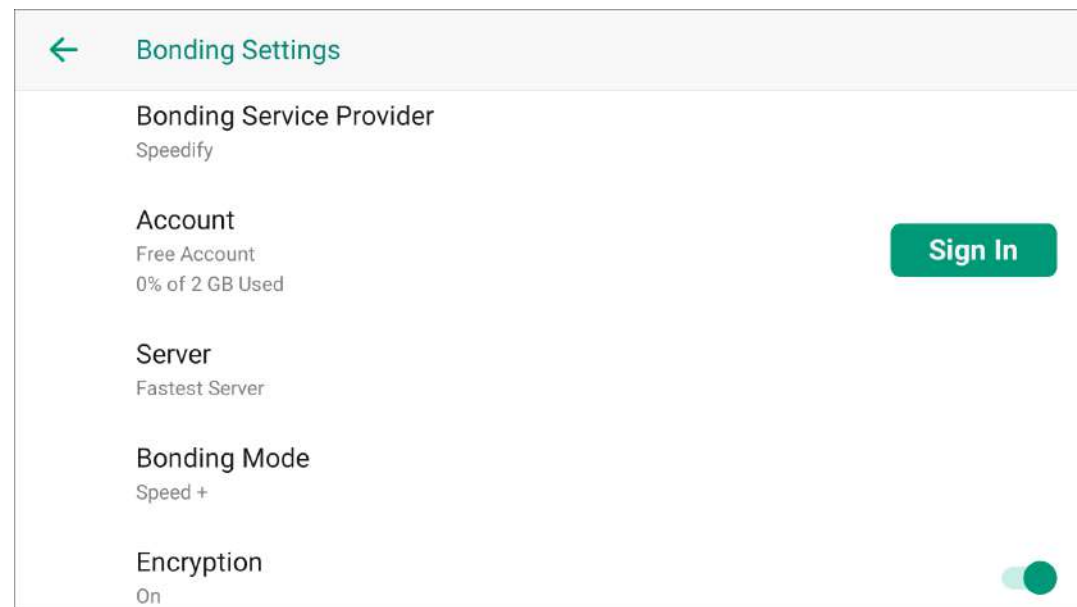


Network

Director Mini supports multiple network connections, including wired, Wi-Fi and cellular network. These networks can be connected at the same time. The priority order for the device selecting network connection is wired > Wi-Fi > Cellular network.

Network Bonding

Network Bonding can use all available Internet connections to optimize live stream stability.

Set Network Bonding

Tap  behind **Network Bonding** to enter the Bonding Settings page and set the follows.

- **Bonding Service Provider:** Currently, only Speedify service is available.
- **Account:** tap **Sign In** and enter your Email and password to sign in. If you do not have a Speedify account, you can use the Free Account or go to [Speedify](#) to upgrade for unlimited usage.
- **Server:** select the server to use.
 - **Automatic Selection:** The device automatically connects to the best servers for performance.
 - **Fastest Server:** By default, the device picks the closest Speed Server,


which will give you the fastest internet connection.

- **Closest Dedicated Server:** It allows all of your clients, mobile and desktop, to use the closest private server that only members of your team can access. (Only for team account)
- **Closest Public Server:** It allows all of your clients, mobile and desktop, to use the public server that only members of your team can access. (Only for team account)
- **Torrent Friendly Server:** This connects you to a server that allows BitTorrent traffic. These servers are located in Amsterdam and, depending on your location, maybe significantly slower than closer servers.
- **Manual Selection:** You can select a Speed Server from a specific country.
 - **Choose a specific country:** Tap a circle on the right side to select a country.
 - **Choose a specific city:** Tap the arrow on the left side of a country to expand the list of cities, and then tap a circle on the right side to select a city.
 - **Choose a specific server:** Tap the arrow on the left side of a city to expand the list of available servers, and then tap a circle on the right side to select a server.
- **Bonding Mode:** decide how your connections are used.
 - **Speed +:** It intelligently distributes your web traffic among all available internet connections in order to deliver optimal speed and performance. (Default)
 - **Redundant:** It operates at the speed of the fastest single internet

connection and use additional data in order to deliver an ultra-reliable connection. Each packet gets sent simultaneously over multiple connections and whichever packet gets through first, is the one to be delivered. Please note that this mode uses more data and more battery.

- **Streaming:** It maximizes the speed and reliability of your streaming traffic by intelligently using both bonding and redundant traffic to get the best performance from your available internet connections. It will prioritize your Streaming traffic over any other traffic, and will intelligently switch between active bonding and redundancy depending on what your connections need. Do keep in mind that this mode can use extra data and battery to help deliver a better streaming experience.
- **Encryption:** Optional. When enabled, it utilizes the latest encryption standards to keep your information private with minimal impact to overall performance.
- **Speed Test:** Optional. Tap to test your individual and combined connection speeds. It shows the download and upload speeds of each connection. Be aware that this feature uses a lot of data, so you may want to run it sparingly if you have a limited data plan or if you are using a free Speedify Plan.

The Speed Test feature is only available after you have enabled Network Bonding and connected the server successfully.

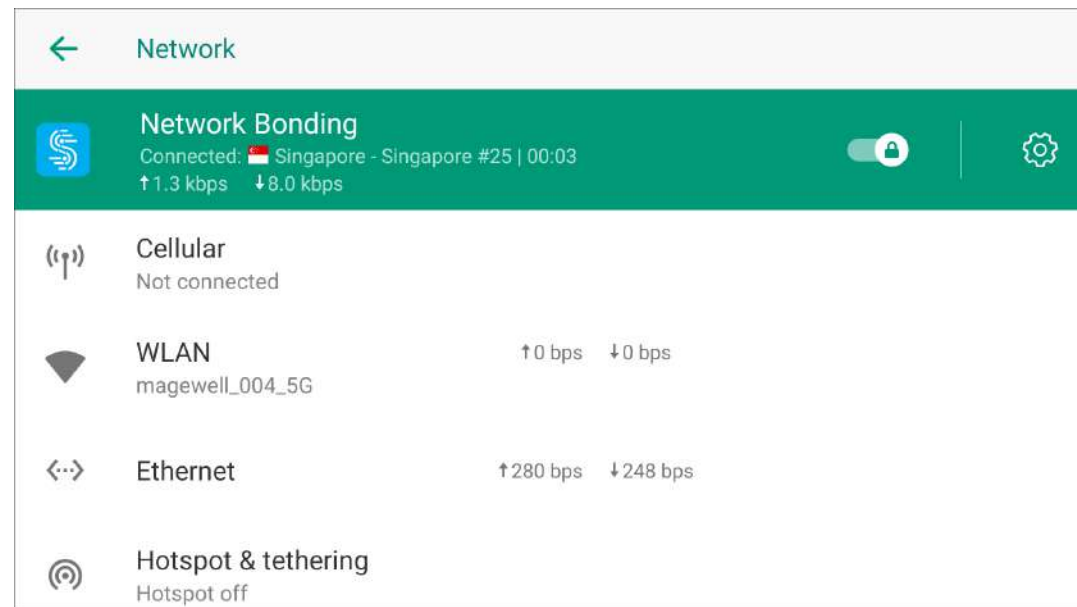

Enable Network Bonding

On the Network page, toggle on the switch of **Network Bonding**, and it starts connecting the server.

When connected, it displays the server name, the time used, the total upload and download speeds. If a lock icon appears, it indicates the connection is encrypted.

The upload and download speeds of each network are displayed underneath.

At the lower right corner, it shows account information and usage. For an unlimited account, it does not show such information.

To stop network bonding, toggle off the switch.

Cellular

If a USB Modem is connected, tap **Cellular** to check network connection information.

Wi-Fi

You can connect your device to a Wi-Fi network to access the Internet and other devices.

Connect to a Wi-Fi network

1. Tap **WLAN**, and then toggle on the switch to enable Wi-Fi.
2. Select a Wi-Fi in the displayed list to connect. (The Wi-Fi with a lock icon requires password.)
3. You can tap the connected Wi-Fi to check more network details, such as signal strength, frequency, security, MAC address, IP address, Gateway, Subnet mask, DNS, and link speed.
4. To delete a Wi-Fi, you can tap the connected Wi-Fi and then tap FORGET. Or you can tap **Saved networks** at the bottom, and tap a Wi-Fi to delete,

and then tap FORGET.

Add a Wi-Fi network

When the router's **SSID** (wireless signal name) is hidden, the device cannot search for the router's wireless signal. It needs to manually enter the router's **SSID**, wireless password and other parameters to connect to the router's wireless signal.

1. Tap **WLAN**, and then toggle on the switch to enable Wi-Fi.
2. Scroll the network list to the bottom, and tap **Add network**.
3. Enter **SSID**, and set Security by selecting the same encryption mode as the router and entering the password if needed.
4. Tap **Save**.

Wi-Fi Direct

Wi-Fi Direct uses Wi-Fi to share data between devices.

1. Tap **WLAN**, and then toggle on the switch to enable Wi-Fi.
2. Scroll the network list to the bottom, tap **Wi-Fi preferences > Wi-Fi Direct**. It lists all the detected devices.
3. Tap a device, and then follow the prompts to connect. To disconnect from Wi-Fi Direct, tap a connected device to disconnect it.
4. (Optional) Tap **RENAME DEVICE**, enter a new name, and tap **OK**.

Ethernet

Ethernet is enabled by default. If you want to disable the Ethernet connection when it is in bad status, tap **Ethernet**, and then toggle off the switch. To enable the Ethernet connection, toggle on the switch.



You can tap **Ethernet configuration** to check and set more information, including connection type (DHCP or Static IP), IP address, network prefix length, DNS address and gateway address.

Hotspot & Tethering

This function uses your device as a mobile hotspot to share your network connections with other devices.

1. Tap **Hotspot & tethering** > **Wi-Fi hotspot**, and toggle on the switch to enable hotspot.
2. Set the hotspot name.
3. Set security. If you select WPA2 PSK, set the hotspot password.
4. Tap **Advanced** to set whether to turn off hotspot automatically and select AP Band. Please refer to [Which AP band should I choose for hotspot](#).

To ensure the connection effect, when 5G is selected, the recommended optimal connection distance is within 5 meters, and a maximum of 5 devices can be connected. When 2.4G is selected, the recommended optimal connection distance is within 5 meters, and a maximum of 2 devices can be connected.

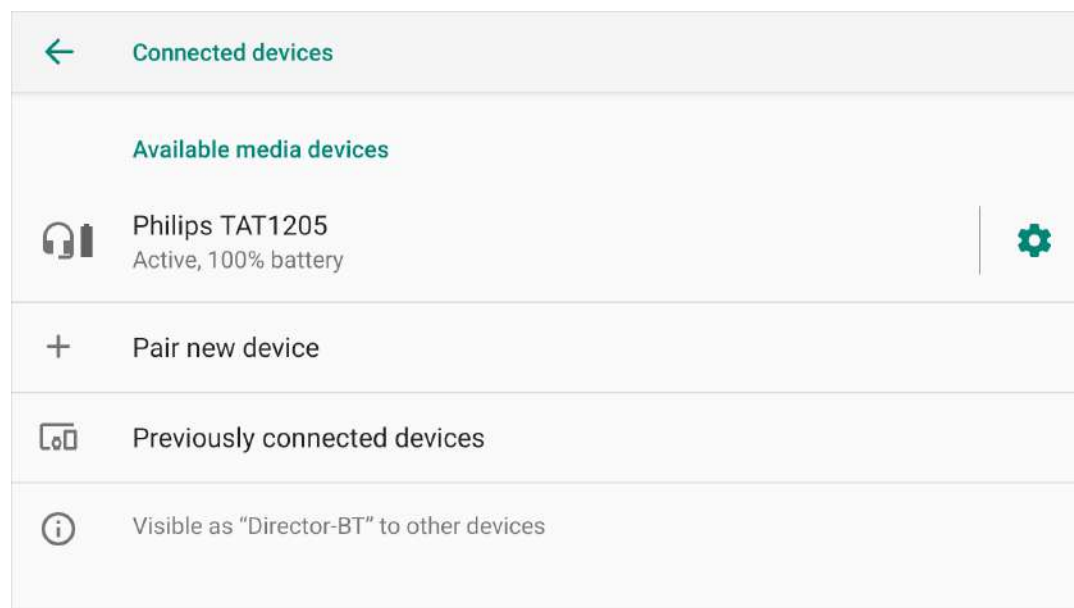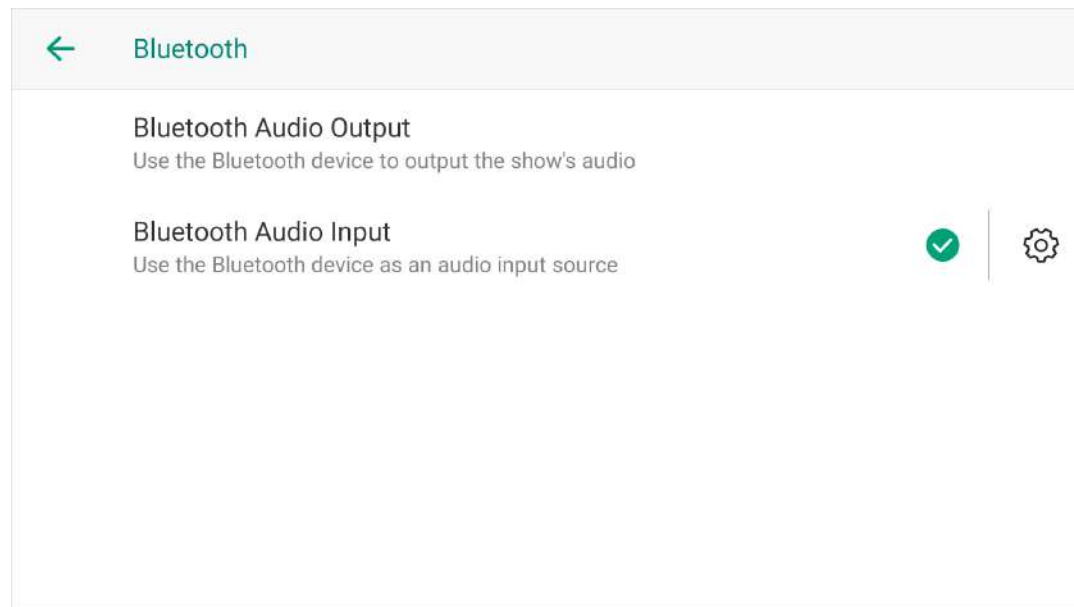






Bluetooth

You can use your Bluetooth device for audio output or audio input.

1. Tap **Bluetooth** in the settings page.
2. Select Bluetooth audio usage.
 - **Bluetooth Audio Output:** Use the Bluetooth device to output the show's audio. (default)
 - **Bluetooth Audio Input:** Use the Bluetooth device as an audio input source.

When you change the mode, the device needs to restart.

3. Tap  on the right.
4. Tap **Pair new device**.
5. (Optional) Tap **Device name** to rename the device name for Bluetooth pairing.
6. Select a Bluetooth device from the list of Available devices.
7. Go back to the previous page, and the device is listed in **Available media devices**.
8. To disconnect the Bluetooth device, tap  > **DISCONNECT**, and return to the previous page.
9. To reconnect a device, tap **Previously connected devices**, select the device to reconnect, and tap  > **CONNECT**.
10. To delete the Bluetooth device, tap  > **FORGET** > **FORGET DEVICE**.

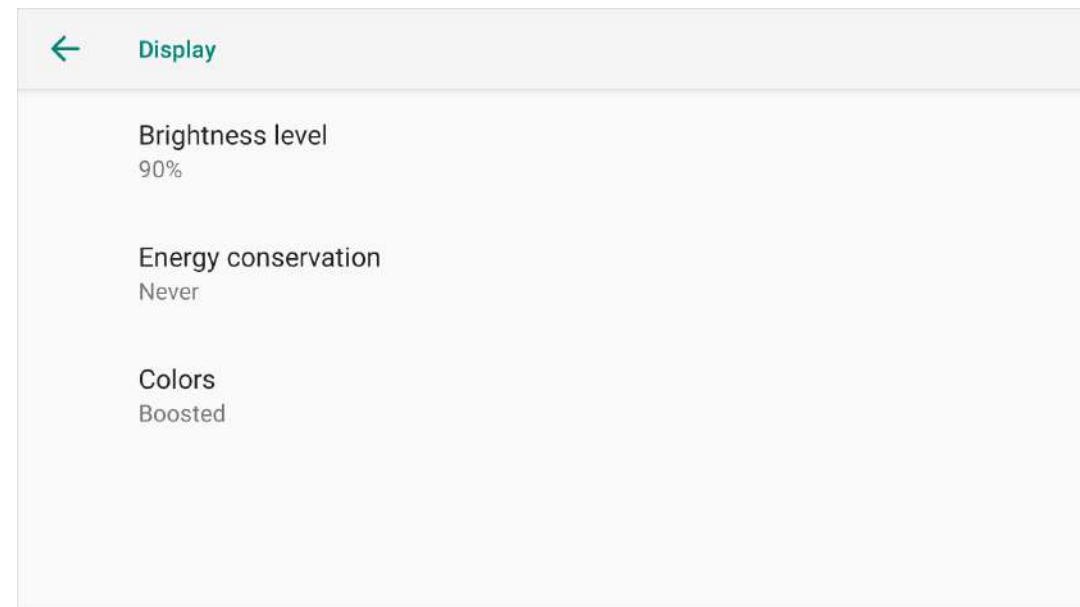


The relative pages may differ with BT device of different brands, vendors and types. Please operate according to the page prompts.

Display

Tap **Display** in the settings page to configure the screen display properties.


- **Brightness level:** Move the Brightness slider to right or left to adjust the brightness.
- **Energy conservation:** Choose the amount of time you want to activate energy conservation. The screen will turn dark after the set time when there is no activity. It is not enabled by default.
- **Colors:** Choose one color mode you like. Options include Natural, Boosted, Saturated, and Adaptive.

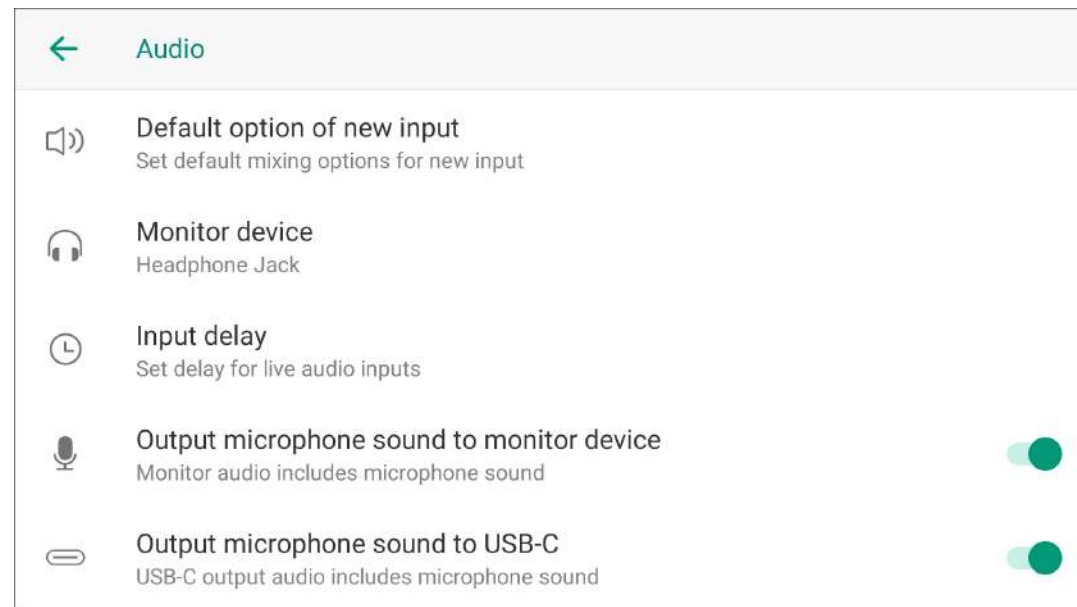

Audio

Tap **Audio** in the settings page, to set the properties of audio.



- **Default option of new input:** set the default mixing options for an audio input when it newly connects to the device.
- **Monitor device:** select a monitor device.
 - Headphone Jack: device connected to the headphone jack
 - Bluetooth Device: device connected through BT
 - *USB device:* USB device(s) connected to Director Mini. The system automatically lists device name(s).
- **Input delay:** set delay for live audio inputs, to match up the audio and video tracks. You can set the delay for inputs from microphone jack, HDMI 1, HDMI 2, and external USB device(s).
- **Output microphone sound to monitor device** (enabled by default): In some cases, you may want to input your own microphone using the 3.5mm mic/line input for narration while monitoring the other audio and video sources. To exclude your own microphone audio from only your headphones or Bluetooth connection, toggle the audio off. If you are using the 3.5mm mic/line input from a soundboard and need to monitor that audio source all the time, toggle the audio on.
- **Output microphone sound to monitor device** (enabled by default): For example, if you don't want microphone audio to play on a large-screen monitor, toggle it off. To play microphone audio in sync, toggle it on.

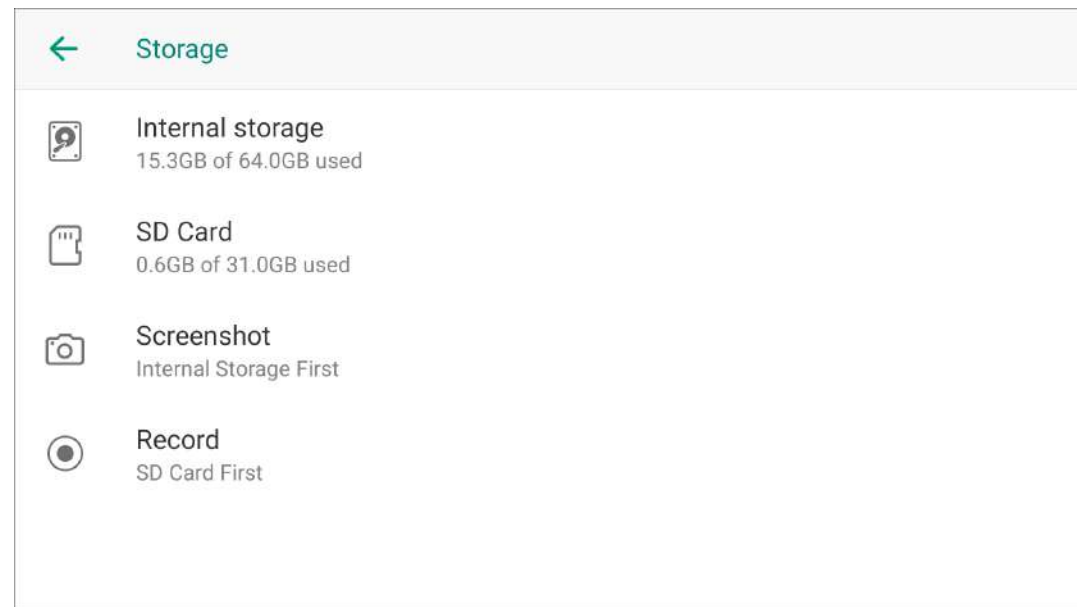

Storage

Tap **Storage** in the settings page, to check the storage status of internal storage and SD card, and set storage path for screenshot and record.


1. Tap **Internal storage**.
 - At the top, you'll see a color-coded bar showing how much space the device has left, how much is taken up, and what's taking it up.
 - Below there shows how much space is taken by **Show** and **Record and screenshot** respectively. You can tap on each item to view more details and delete files.
 - The last line shows the remained time for recording.
2. Tap **SD Card**
 - At the top, you'll see a color-coded bar showing how much space the SD card has left, how much is taken up, and what's taking it up.
 - Below there it shows how much space is taken by **Record and screenshot**. You can tap the item to view more details and delete files.
 - The following line shows the remained time for recording.
 - The last line is the Format function. Tap it to format the SD card.
3. Tap **Screenshot**, and then select your preferred path, **Internal Storage First** or **SD Card First**.
4. Tap **Record**, and then select your preferred path, **Internal Storage First** or **SD Card First**.

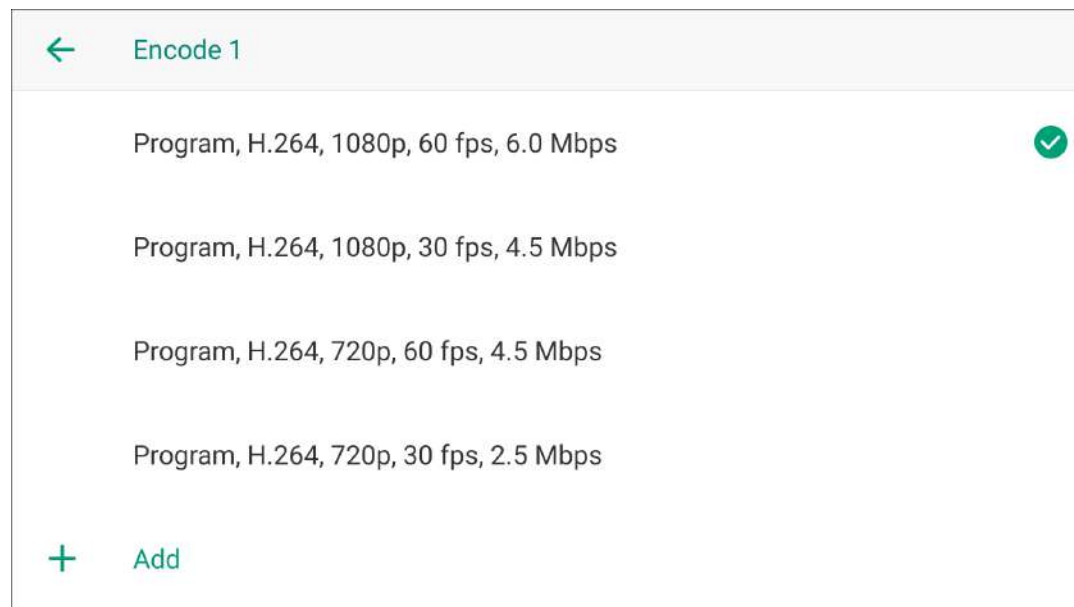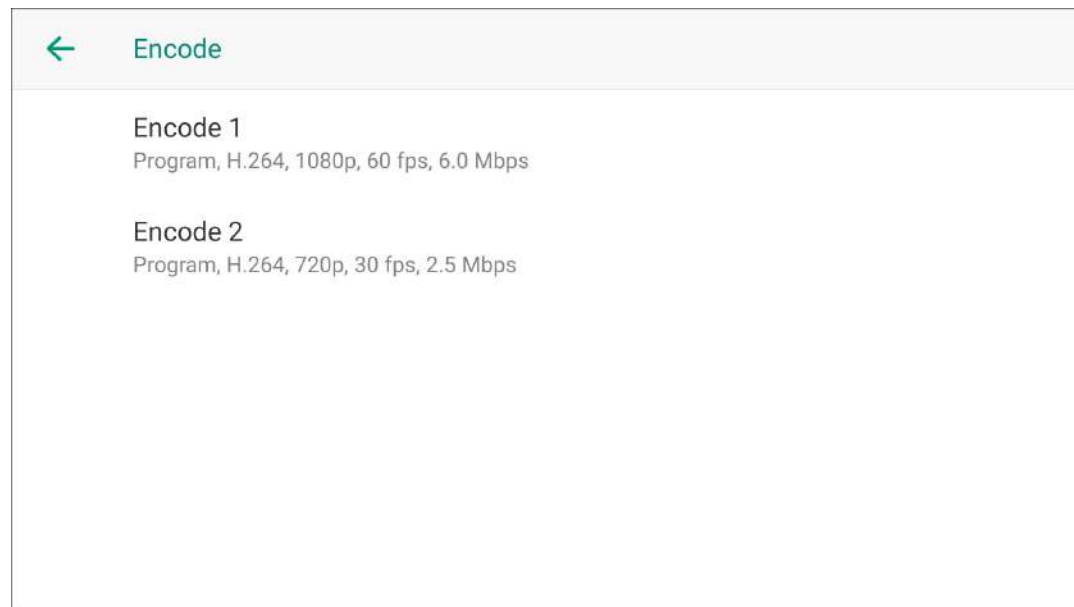

Encode

Each show has two encoders for selection when you configure stream servers and record parameters. You can customize encoding parameters and select encoding source for Encode 1 and Encode 2.


1. Tap **Encode** on the settings page.
2. Tap **Encode 1** or **Encode 2**.
3. (Optional) Tap **+ Add** to customize an encode scheme with the following parameters, and then tap **Add**.
 - Encoding source: Program, HDMI 1, HDMI 2, Webcam 1, Webcam 2.
 - Codec: H.264, H.265
 - Resolution: 540, 720, 1080
 - Frame rate: Options change along with the frame rate of the show, which can be 60/59.94/50/30/29.97/25/24/23.98/15 fps.
 - Video bitrate: enter a custom value.
 - Audio bitrate: 64, 96, 128
 - Advanced:
 - Key frame interval: tap + or - to set
 - Encode level: Baseline, Main, High
 - Bitrate mode: **VBR**, **CBR**
4. Select an encode scheme from system options or custom options. System options use Program as the default encoding source.
5. To edit an existing encode scheme, swipe it left and tap **Edit**.
6. To delete an existing encode scheme, swipe it left and tap **Delete**.

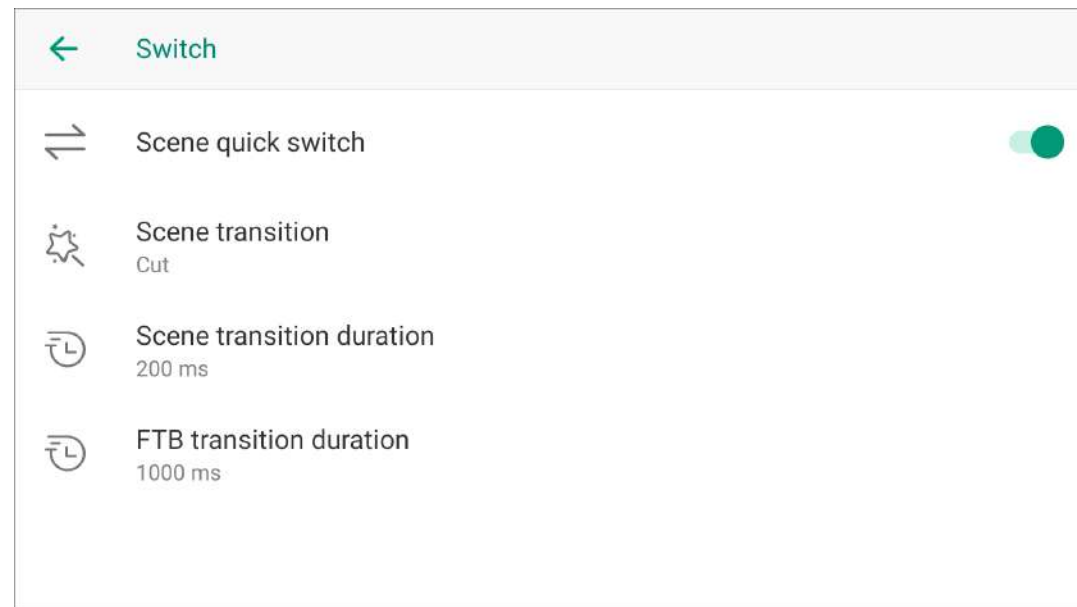

Switch

Tap **Switch** on the settings page to set switch mode and transition effect.


- **Scene quick switch**: set scene switch mode.
 - Toggle on the switch to enable quick switch mode (default). When you tap thumbnails in the scene list, it switch scenes directly.
 - Toggle off the switch to enable manual switch mode. When you tap a thumbnail in the scene, you can preview the scene, and then switch the scene into the Program view.
- **Scene transition**: set transition effect for quick switch.
 - Cut: scenes switch directly.
 - Fade: scenes switch with a fade effect.
- **Scene transition duration**: set transition duration for the fade effect.
 - Enter the value, ranging from 50ms to 1000ms, and then tap Save.
- **FTB transition duration**: set transition duration for **FTB**.
 - Enter the value, ranging from 200ms to 2000ms, and then tap Save.

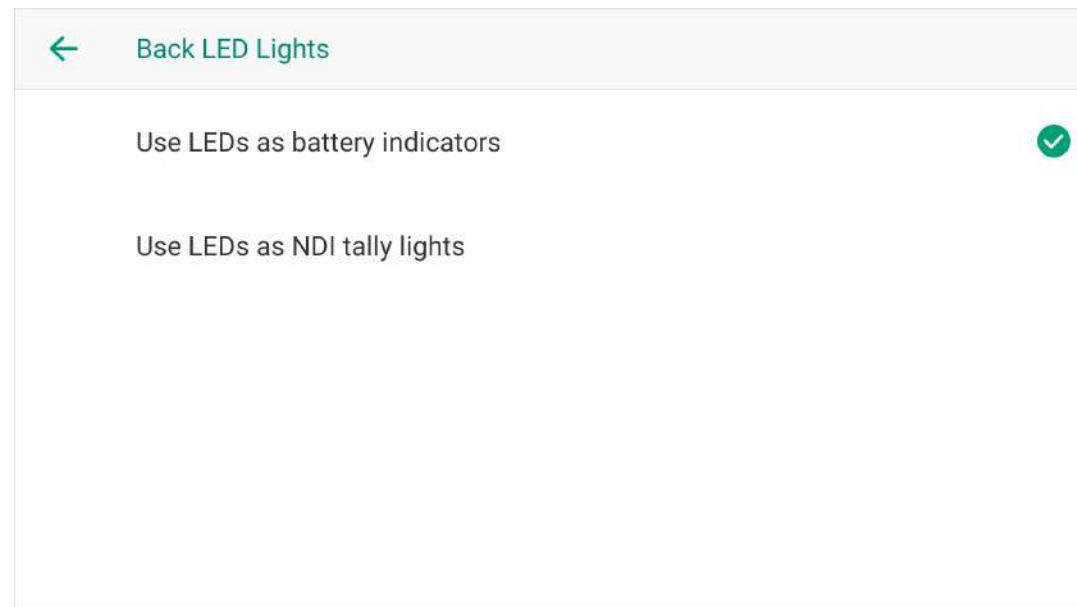

Back LED Lights



You can customize the function of the back LED lights.

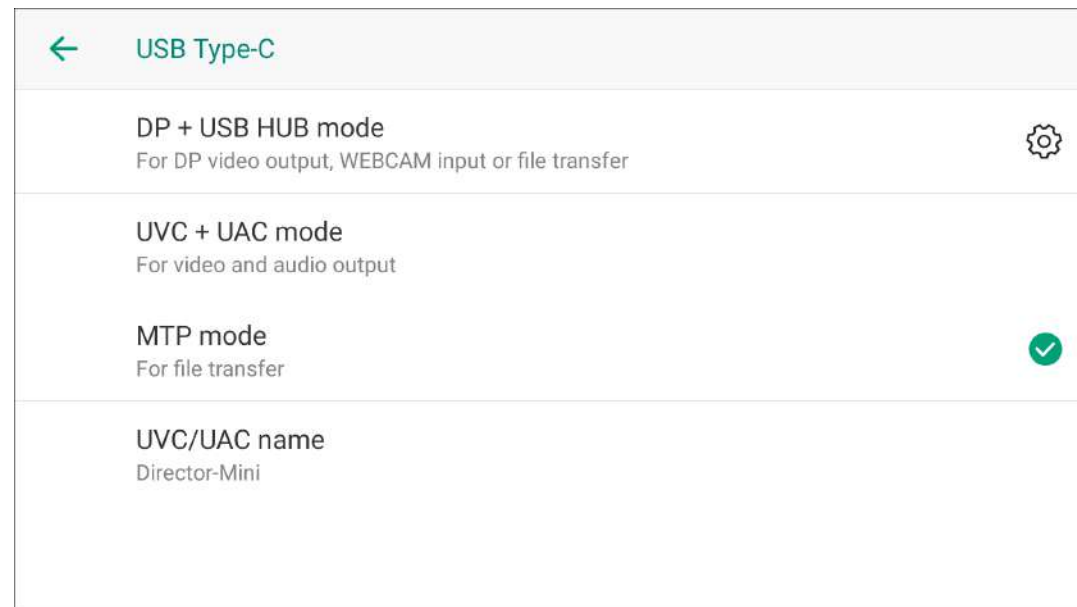- **Use LEDs as battery indicators:** to indicate the battery status. For details, please refer to [Battery Indicator](#).
- **Use LEDs as NDI tally lights:** to indicate the signal status for NDI streaming. Red indicates the NDI signal is in PGM view, while green indicates the NDI signal is in PVW view. The two LED lights correspond to the 2 channels of NDI streaming, and keep consistent with the NDI Tally on the top status bar. For details, please refer to [NDI Tally](#).




USB Type-C

The USB-C port plays a multifunctional role. You can set its usage mode.

- **DP + USB HUB mode:** this mode is used for connecting external screen for video output, connecting WEBCAM for video input, or connecting a USB flash drive for file transfer, such as importing and exporting shows. Tap  on the right to set the external screen.
 - Select displayed content:
 - Clean Program
 - Preview
 - Multi-view: Tap  to [set multi-view appearance](#).
 - Duplicate Screen
 - Loop HDMI 1
 - Loop HDMI 2
 - Select the rotation angle to fit for the external screen: rotate 90° to left, or rotate 90° to right.
 - Toggle on or off the switch to set whether to pop-up the quick setting when an external screen is detected.
- **UVC + UAC mode:** this mode is used for connecting to a computer for video and audio output. Director Mini can be recognized as a webcam by streaming software, such as Skype and Zoom. (Default)
- **MTP mode:** this mode is use for connecting to a computer for file transfer.

When you switch UVC/UAC mode to/from MTP mode, the device needs to be restarted to take effect.

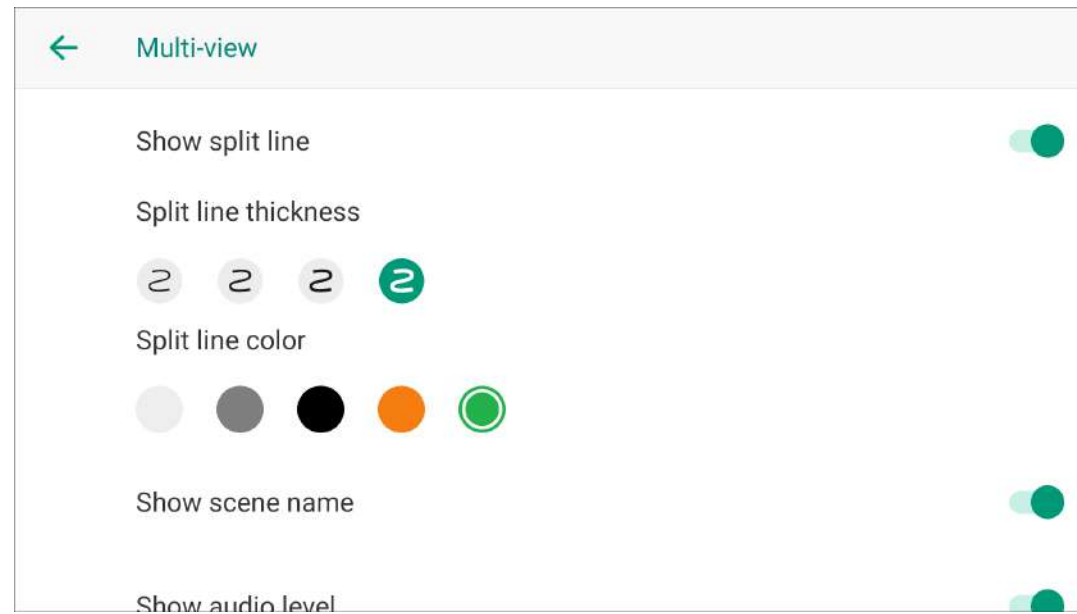



- **UVC/UAC name:** tap to change the name for other software recognizing Director Mini. The default name is Director-Mini.

Set Multi-view

You can tap  on right side of **Multi-view** for more settings.

- **Show split line:** toggle on/off the switch to show or hide split lines.
- **Split line thickness:** select your preferred thickness for split lines.
- **Split line color:** select your preferred color for split lines.
- **Show scene name:** toggle on/off the switch to show or hide scene names.
- **Show audio level:** toggle on/off the switch to show or hide audio level.
- **Show Preview/Program text:** toggle on/off the switch to show or hide Preview/Program text.

On the external screen connected to the USB-C port, you can see 8 video boxes at the bottom, displaying the scene thumbnails, and two larger boxes at the top, with the left one showing Preview view and the right one showing Program view.

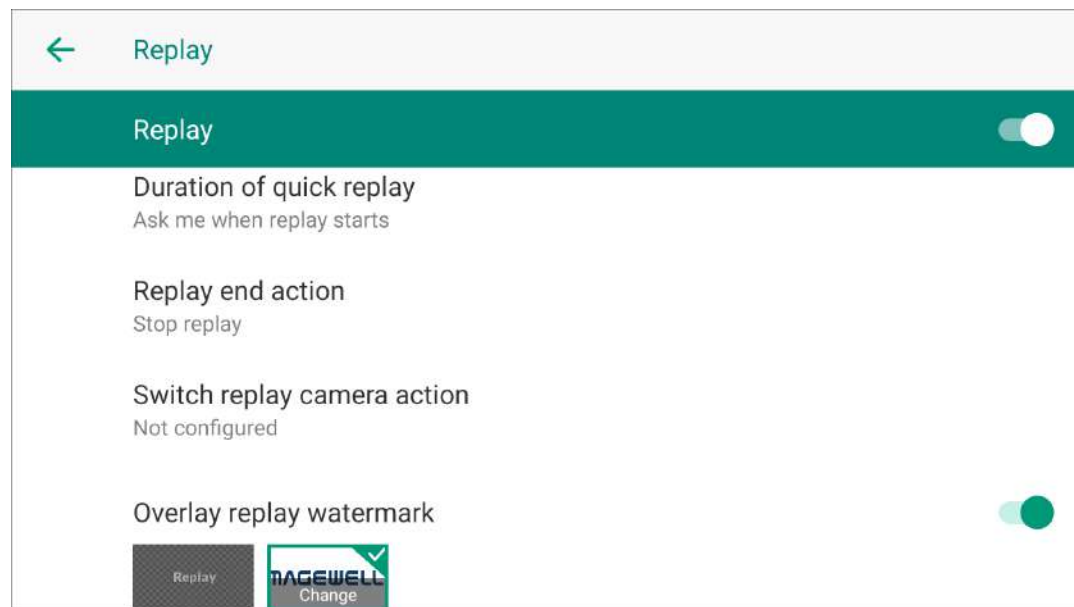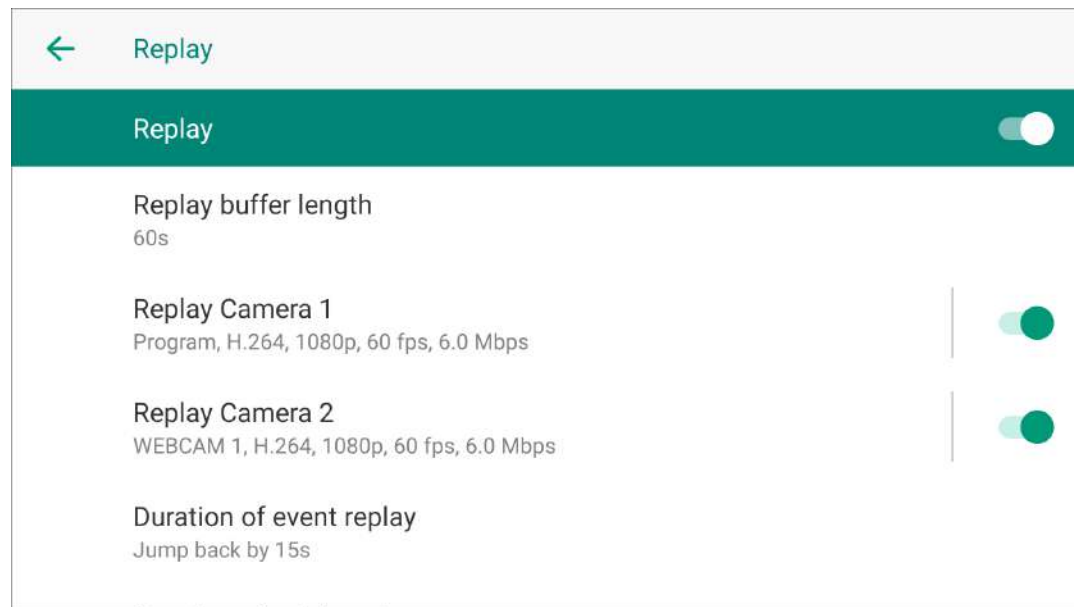

Replay


Replay allows you capture some of greatest moments, slow down the action and save your highlights.

Toggle on the switch to enable the function, and then set the following items.

- **Replay buffer length:** tap and drag the slider to set the buffer length for relay, ranging from 3s to 60s.
- **Replay Camera 1/2:**
 - Tap the Replay Camera 1/2 to select the content to replay. By default, Camera 1 use the content of Encode 1, and Camera 2 use the content of Encode 2. You can also select NDI sources for replay.
 - Toggle on/off the switches to set one-channel or two-channel replay. At least one camera should be toggled on.

Replay does not support Full NDI source.

- **Duration of event replay:** You can choose a fixed duration, or select "Ask me when setting" to manually choose the duration when setting an event.
- **Duration of quick replay:** You can choose a fixed duration, or select "Ask me when replay starts" to manually choose the duration when your start quick replay.
- **Replay end action:** tap to select the end action.
 - Loop replay: it keeps playing repeatedly.
 - Show last frame: it stops replay and shows the last frame.
 - Stop replay: it stops replay and goes back to the program view. (Default)
- **Switch replay camera action:** define where the video of the target camera

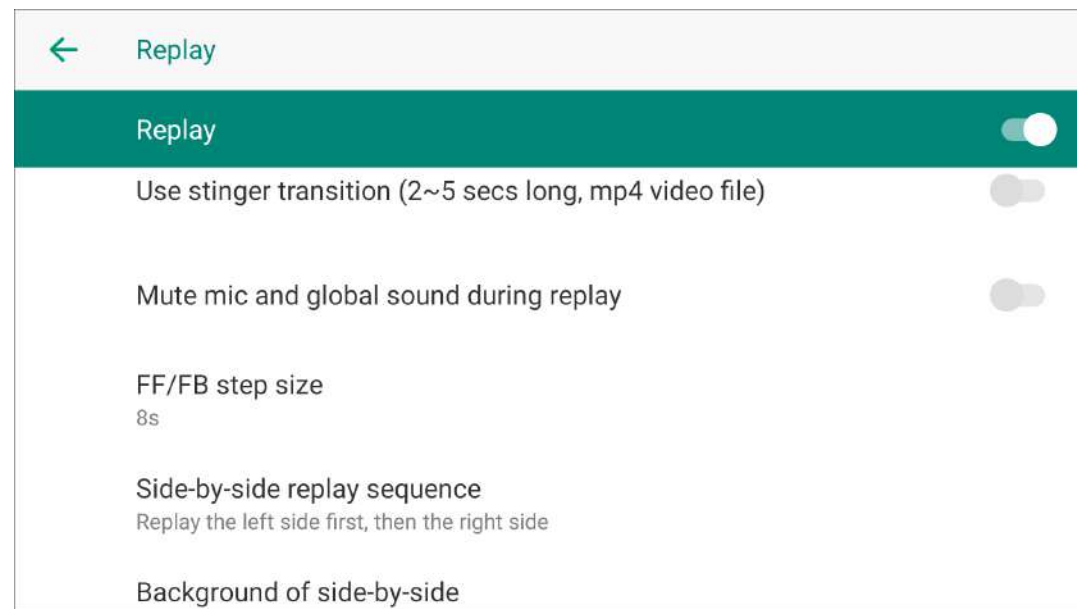


will start playing if you switch from one camera to another.

- **Overlay replay watermark:** toggle on/off the switch to show or hide the replay watermark during the replay. You can select the default watermark or upload a picture by tapping "+". And you can tap the thumbnail again to change it. Supported format includes PNG, JPEG and BMP.

The watermark is aligned with the upper right corner. Please customize your watermark with a proper size.

- **Use stinger transition:** when toggled on, the stinger transition will be add to the start and end of the replay. You can select the default video or upload a video clip by tapping "+". And you can tap the thumbnail again to change it. Supported video format is MP4, with a length of 2 to 5 seconds.
- **Mute mic and global sound during replay :** toggle on/off the switch to mute or unmute the microphone and global sound during replay.
- **FF/FB step size:** tap to select the step size for fast forward and fast backward during replay.
- **Side-by-side replay sequence:** tap to select the preferred sequence.
- **Background of side-by-side:** select a color or picture as the background of the side-by-side layout. You can tap + to upload a picture. Supported format includes PNG, JPEG and BMP.

As Replay will continuously consume some resource, it is suggested to disable it if you do not need this function.

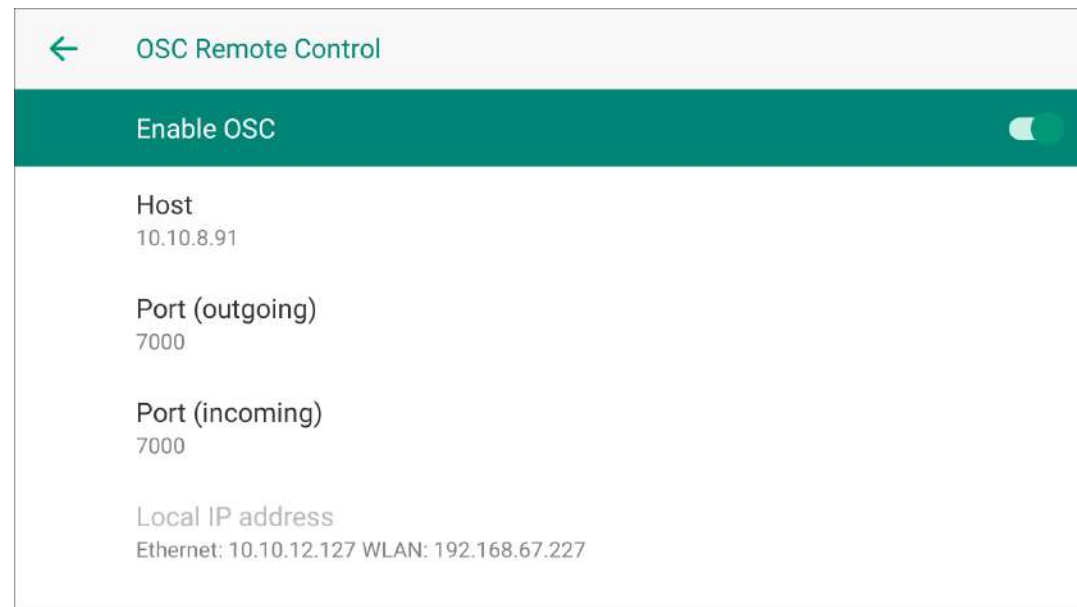

OSC Remote Control

Director Mini incorporates the Open Sound Control (OSC) protocol, enabling you to operate the device effortlessly via the OSC protocol.

The user datagram protocol (UDP) is used by the device for communication with OSC enabled applications.

Enable OSC

1. Toggle on the switch of **Enable OSC**.
2. Tap **Host** to enter the IP address of the device installed with the OSC enabled app, which is used for Director Mini sending messages to the app.
3. Tap **Port (outgoing)** to enter the number of outgoing port. It can be entered in the OSC enabled app as the destination for the app sending messages to Director Mini.
4. Tap **Port (incoming)** to enter the number of incoming port. It can be entered in the OSC enabled app to listen for received synchronization messages from Director Mini. The default number is 7000.
5. View **Local IP address** to get relative IP address information. It can be entered in the OSC enabled app for the app sending message to Director Mini.
6. Connect your OSC app with the device based on the above information, and then start controlling the device.

You can visit [Director Mini OSC](#) for more details about OSC addresses and arguments.



Use TouchOSC

Director Mini is compatible with multiple OSC enabled apps, such as TouchOSC. We provide a sample layout program for TouchOSC, which helps you start using OSC control quickly and easily.

The following introduces how to connect the TouchOSC app with Director Mini and get to start use the sample layout.

1. Go to [TouchOSC](#) to download the TouchOSC app.
2. Open TouchOSC, click the chain link button on the toolbar to open the Connections configuration window.
3. Switch to the OSC tab page, enable the checkbox next to Connection 1, select UDP from the drop-down box, and enter the following information.
 - **Host:** The IP address of Director Mini.
 - **Send Port:** The Port (incoming) you've set on Director Mini.
 - **Receive Port:** The Port (outgoing) you've set on Director Mini.
4. Click **File > Open...**, and open the [Director Mini OSC Sample Layout](#) file.
5. Click the play button on the toolbar to switch to control surface view.
6. Start to control Director Mini via the control surface.

For more information about how to use TouchOSC, please go to [TouchOSC](#).





System

Tap **System** on the settings page to set the system related items.


Language


1. Tap **Language** in the system page.
2. Tap a language.
3. Tap **Continue**. The device will restart and change to the selected language.

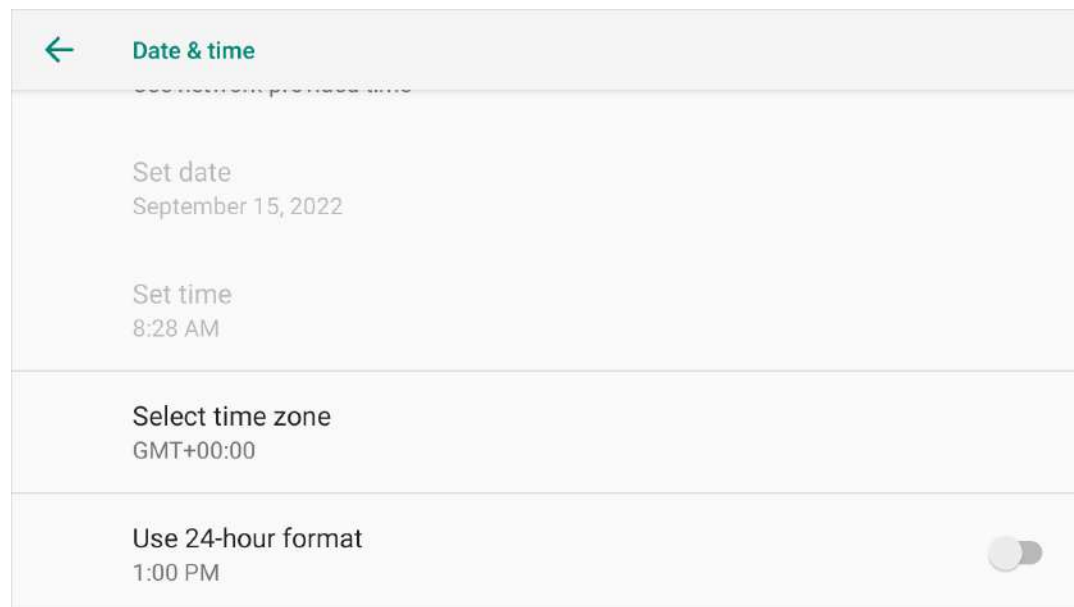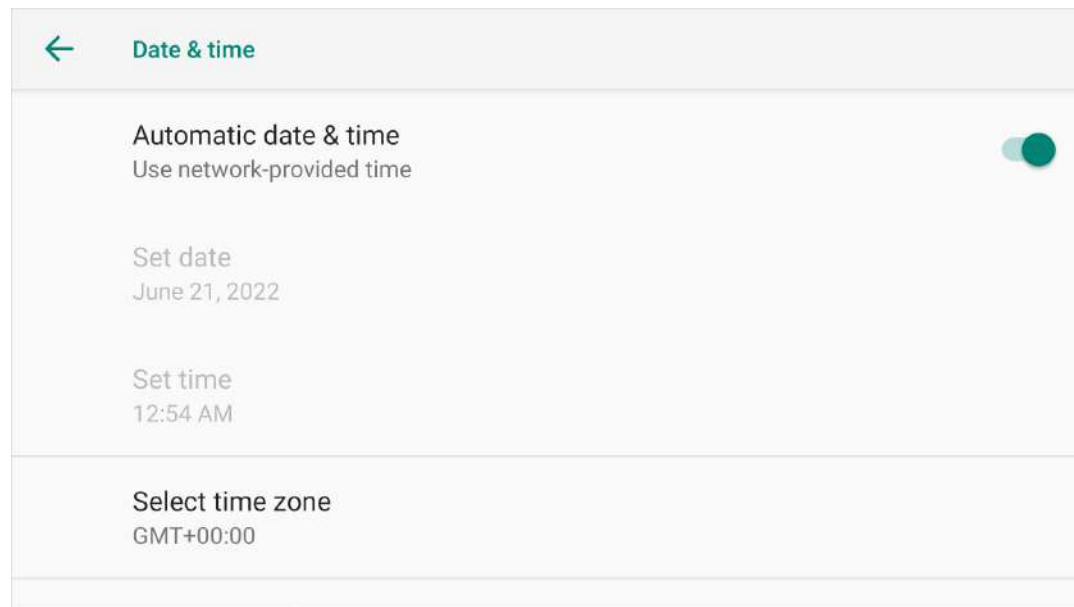

Date and Time

By default, your device receives date and time information from the network. Tap **Date & Time** in the system page, and then you can set manually.


- Automatic date and time: Use the date and time provided by the network. When it is disabled, you can set date and time respectively.
- Select time zone: Tap it to select time zone by region, or tap  at the upper right corner to select by UTC offset.
- Use 24-hour format: Use 12-hour format by default. You can turn it on to switch to 24-hour format.

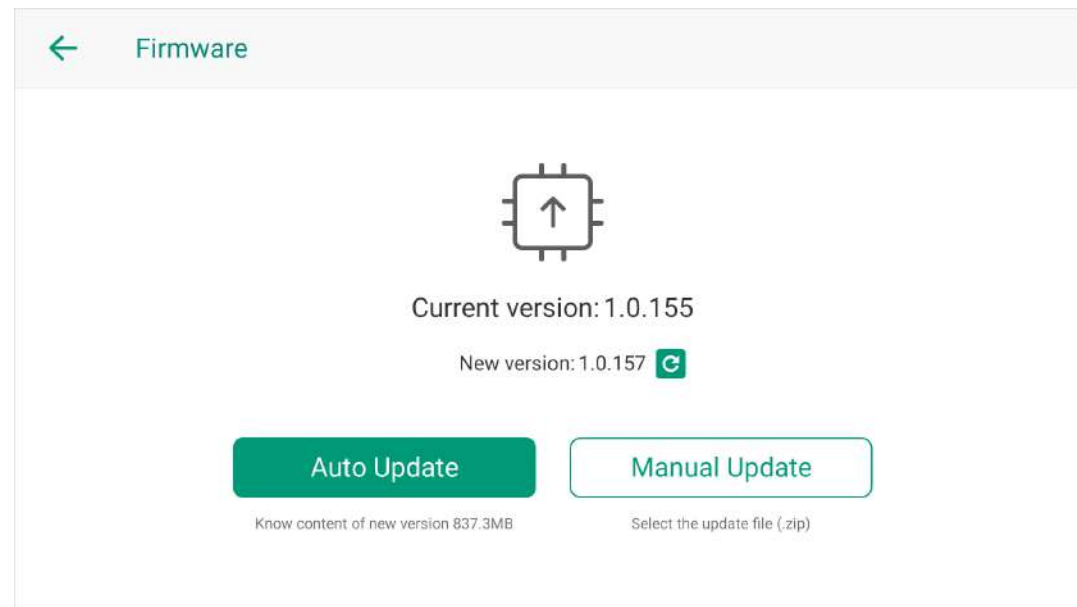


Update Firmware

Director Mini supports automatically and manually updating firmware. Manual update can update to any firmware version, while auto update can only update to the online latest version.

Auto Update

1. Ensure your device is connected with network.
2. Tap **Firmware** on the system page.
3. Check the information of current version and new version.
You can tap the  button to refresh the information of new version.
4. If a new version is available, tap **Auto Update**.
The size of the update file will be displayed under the button.
5. Read the release notes of the new version on the popup to decide whether to update to this version.
6. Tap **Update**. The device starts downloading the update file and implementing update automatically. Please wait and do not exit.

 During the upgrade process, do not power off or restart your device. This may cause irreversible damage to your device.

7. When the firmware update is completed, tap the **Reboot** button to restart your Director Mini device.

If it accidentally exits or the network is disconnected during update file downloading, Director Mini supports resuming from the break point.

Manual Update


Please download the firmware update file on [Magewell official website](#), and then follow the steps below to update your Director Mini device.

1. Import the update file to the internal storage of the device, or import it to an SD card / USB flash driver, and insert the SD card or USB flash driver to the device.
2. Tap **Firmware** on the system page to enter the Firmware page which displays the information of current version and new version.
3. Tap **Manual Update**, and then select the update file.
4. Director Mini will then upgrade automatically. Please wait and do not exit.

⚠ During the upgrade process, do not power off or restart your device. This may cause irreversible damage to your device.

5. When the firmware update is completed, tap the **Reboot** button to restart your Director Mini device.


If the firmware update fails, refer to [What to do when firmware update fails](#).

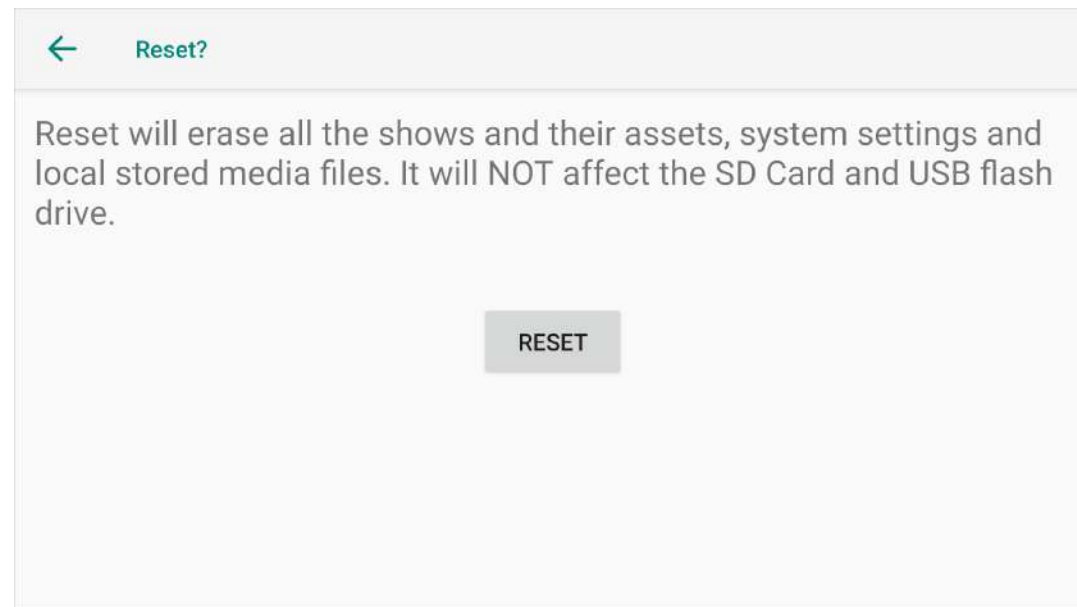

Reset

⚠ This function is going to reset the device. Before resetting, make sure that you have backed up all the files you need.

1. Tap **Reset** in the system page.
2. Tap the **Reset** button. The device will be rebooted with all the shows and their assets, system settings and local stored media files being deleted.

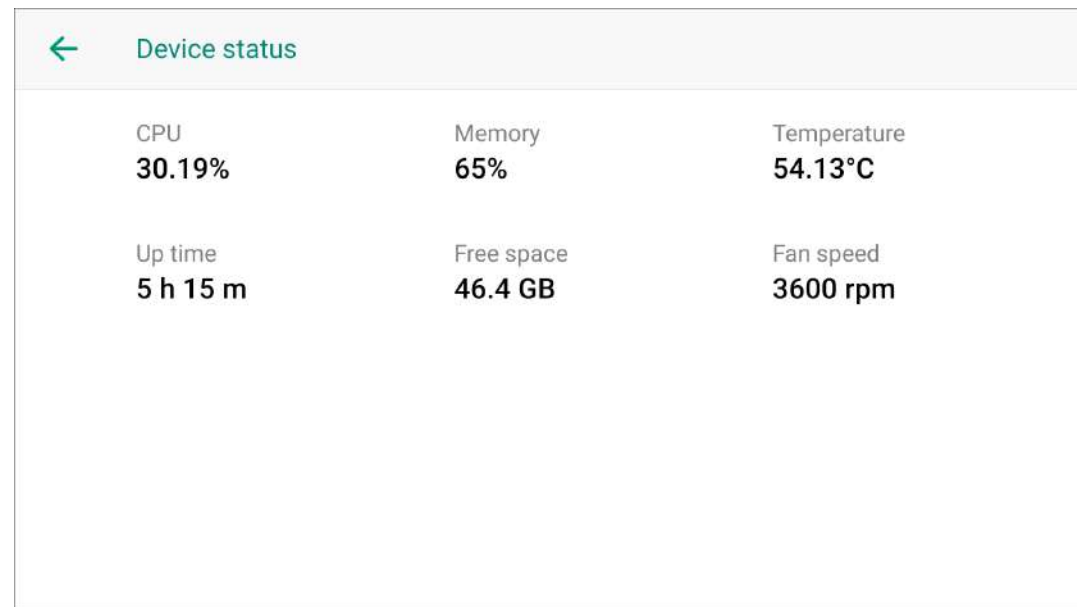



The screenshot shows a 'Device status' page with a back arrow and the title 'Device status'. Below the title, there are six metrics arranged in two rows and three columns. Each metric is displayed with its name in a smaller font and its value in a larger, bold font.

Device status		
CPU 30.19%	Memory 65%	Temperature 54.13°C
Up time 5 h 15 m	Free space 46.4 GB	Fan speed 3600 rpm

Device Status

Tap **Device status** in the System page, and it shows the running status of the device.

- **CPU:** the CPU usage of Director device, in percentage.
- **Memory:** the memory usage of Director device, in percentage.
- **Temperature:** the temperature of the chipset on Director device. To avoid overheat, ensure that device is working in a well-aired environment with proper temperature. When the temperature approaches 90 degrees, you need to reduce the temperature, such as by using a fan.
- **Up time:** the duration that Director device keeps running since last startup.
- **Free space:** the available storage of Director device.
- **Fan speed:** the rotation speed of the fan per minute. This changes based on the temperature of Director device.

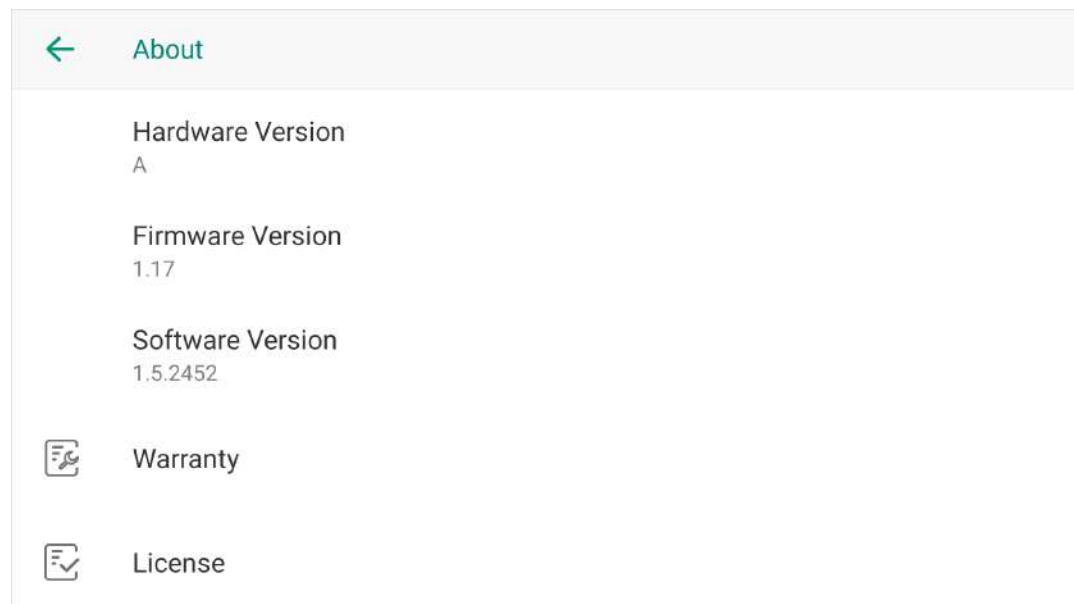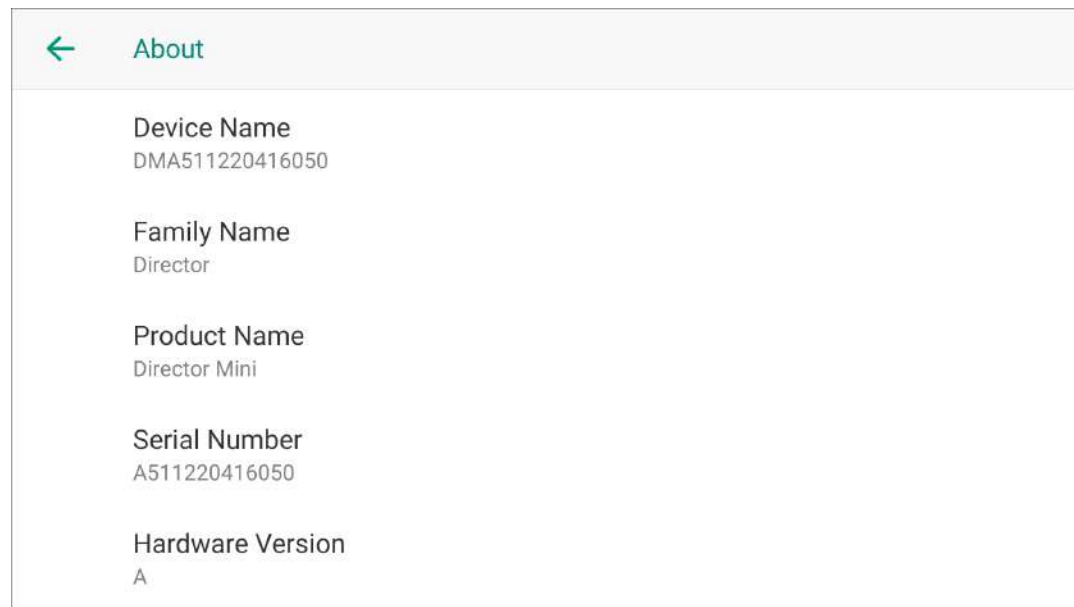

About

Tap **About** in the system page, and it shows the information of the device, including its device name, family name, product name, serial number, hardware version, firmware version, software version, warranty, and license.

Rename the device

You can rename the device.

1. Tap **Device Name**, and enter a new name.
2. Tap **Save**

Battery


Director Mini supports two hot-swappable NP-F battery packs, which allows for device operation without the need for a physical power connection.

You can insert battery and power adapter separately or simultaneously. When they are both inserted, Director Mini uses the power supplied by the power adapter as the priority.

Caution

If the battery pack is mishandled, the battery pack can burst, cause a fire or even chemical burns. Please read the following cautions before installing batteries.

- Do not disassemble the battery pack.
- Do not crush and do not expose the battery pack to any shock or force such as hammering, dropping or stepping on it.
- Do not short circuit and do not allow metal objects to come into contact with the battery terminals.
- Do not expose to high temperature above 60°C (140°F) such as in direct sunlight or in a car parked in the sun.
- Do not incinerate or dispose of in fire.
- Do not use damaged or leaking batteries.
- Be sure to charge the battery pack with a qualified charger.
- Keep the battery pack out of the reach of children.
- Keep the battery pack dry.

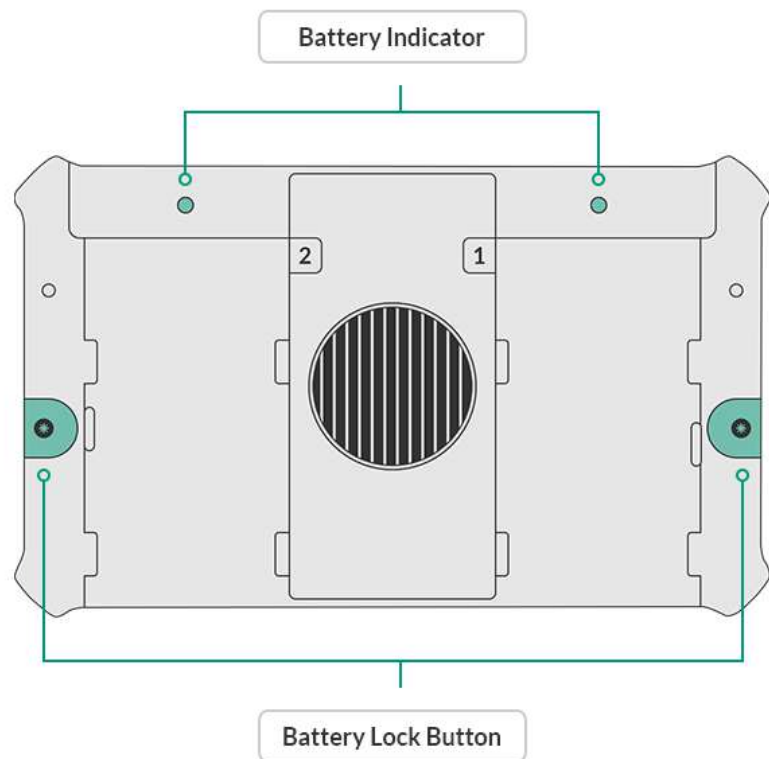

Battery Installation

Director Mini supports 7.4V NP-F type battery packs, such as Sony NP-F550 and Sony NP-F750. You can use the same or equivalent types.


- **Install:** press the lock button first and put the battery into the slots until it is locked in the correct position.
- **Remove:** press the lock button first and remove the battery.

Battery Indicator

Power on the device. On the back of the device, the battery indicator corresponds to the battery lights up. The indicator has three colors to indicate the battery percentage.



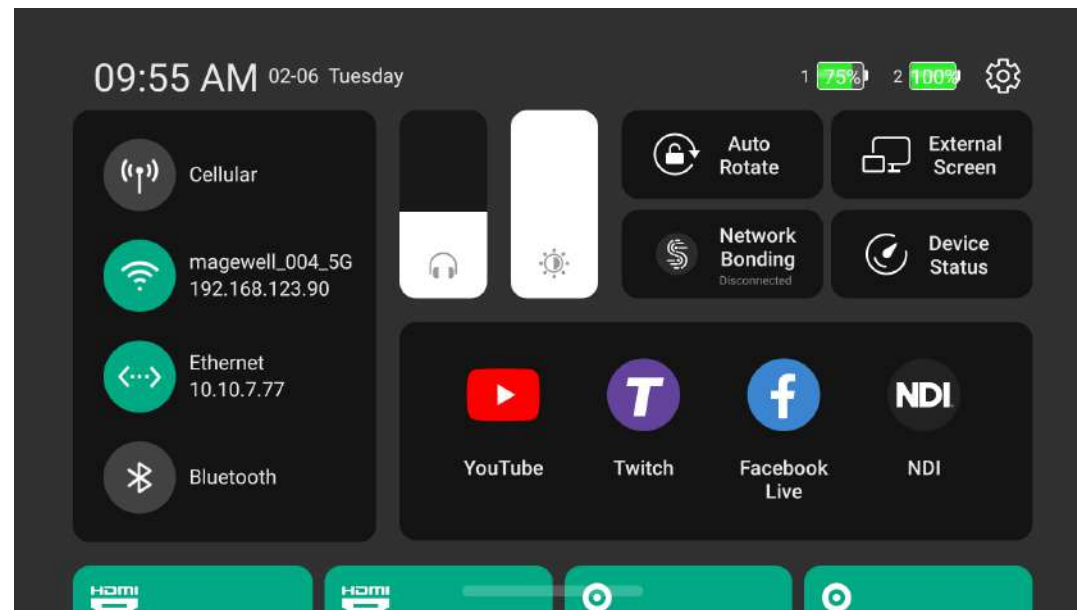

- **Green:** 50% - 100%
- **Orange:** 25% - 50%
- **Red:** <25%

When the battery is depleted, the corresponding indicator lights off.



Battery Status

On the screen, you can also see the battery status icon on the status bar. When there are two batteries installed, it shows the two battery status icons.

-  : 75% - 100%.
-  : 50% - 75%
-  : 25% - 50%
-  : < 25%

You can also check battery status on the Control Center by swiping down from the top of the screen.

If the power adapter is also connected, the device uses power adapter in priority and it does not show the battery status icon.

During operation, your Director Mini will use the battery with the lower charge, then swap over to the other when the battery is depleted without interruption.

As Director Mini supports hot swapping, you can replace the depleted battery without any interruption to your show.

Typical Battery Working Time

The following is what you can expect for a single battery.

Capacity	Working Condition	Working Hours
7800mAh	Displaying, streaming and recording a multi-view scene consisting of HDMI, Video and WEBCAM sources	3 hours 30 minutes
2200mAh	Displaying and streaming an HDMI scene	2 hours 20 minutes

* Based on ideal conditions.

Shortcuts for Director Mini

You can connect a USB keyboard, such as X-Keys and NumberPad, to the device, and then go to the Web UI > Produce page to set shortcuts. Then you can call the following functions.

Function Name	Description	Remark
Scene		
Switch to the specific scene	Switch to a specific scene	Specify a scene by selecting scene name
Switch to the first scene	Switch to the first scene	
Switch to the last scene	Switch to the last scene	
Switch to the next scene	Switch to the next scene	
Switch to the previous scene	Switch to the previous scene	
GFX		
Turn on GFX	Display a GFX	Specify a GFX by selecting GFX name
Turn off GFX	Undisplay a GFX	Specify a GFX by selecting GFX name
Turn on/off GFX	Display/Undisplay a GFX	Specify a GFX by selecting GFX name
Clear overlay	Undisplay all displayed GFXs and live comment	
Transition		
Turn on quick switch	Turn on quick switch	
Turn off quick switch	Turn off quick switch	
Turn on/off quick switch	Turn on/off quick switch	

Function Name	Description	Remark
Set transition effect	Set transition effect to "cut" or "fade"	
Set transition duration	Set transition duration, ranging from 50ms to 1000ms	
Set FTB transition duration	Set FTB transition duration, ranging from 200ms to 2000ms	
Stream		
Start live streaming	Start live streaming to a specific destination	Specify the destination by selecting stream name
Stop live streaming	Stop live streaming to a specific destination	Specify the destination by selecting stream name
Start/Stop live streaming	Start/Stop live streaming to a specific destination	Specify the destination by selecting stream name
Stop all live streaming	Stop all live streaming	
Record		
Start recording	Start recording	
Stop recording	Stop recording	
Start/Stop recording	Start/Stop recording	
Screenshot	Take a screenshot	
Video		
Play video	Play video in program view	

Function Name	Description	Remark
Pause video	Pause video in program view	
Play/Pause video	Play/Pause video in program view	
BGM		
Play BGM	Play BGM in program view	
Pause BGM	Pause BGM in program view	
Play/Pause BGM	Play/Pause BGM in program view	
Go to the first song	Go to the first song	
Go to the last song	Go to the last song	
Go to the next song	Go to the next song	
Go to the previous song	Go to the previous song	
Go to the song	Go to a specified song	Specify a song by selecting song name
Audio Mixer		
Set PROGRAM option	Turn on/off PROGRAM audio	
Set PROGRAM volume	Set the gain of PROGRAM audio, ranging from -40dB to 10dB	
Set PREVIEW option	Turn on/off PREVIEW audio	
Set PREVIEW volume	Set the gain of PREVIEW audio, ranging from -40dB to 10dB	
Set MONITOR option	Turn on/off MONITOR audio	

Function Name	Description	Remark
Set MONITOR volume	Adjust MONITOR volume, ranging from -40dB to 10dB	
Select MONITOR device	Set MONITOR device	Specify the device by selecting Microphone Jack, Bluetooth device (if connected) or USB device (if connected)
Set MIC option	Turn on/off MIC audio	
Set MIC volume	Set the gain of MIC audio, ranging from -40dB to 10dB	
Set Bluetooth option	Turn on/off Bluetooth audio	
Set Bluetooth volume	Set the gain of Bluetooth audio, ranging from -40dB to 10dB	
Set USB AUDIO option	Turn on/off a specific USB audio	Specify the USB audio by selecting device name
Set USB AUDIO volume	Set the gain of a specific USB AUDIO, ranging from -40dB to 10dB	Specify the USB audio by selecting device name
Set HDMI 1 action scope	Apply HDMI 1 audio settings to global or per scene	
Set HDMI 1 global option	Set global option of HDMI 1 audio, which can be AFV, Always On or Always Off	
Set HDMI 1 scene option	Set scene-based option of HDMI 1 audio, which can be Audio On or Audio Off	

Function Name	Description	Remark
Set HDMI 1 volume	Set the gain of HDMI 1 audio, ranging from -40dB to 10dB	
Set HDMI 2 action scope	Apply HDMI 2 audio settings to global or per scene	
Set HDMI 2 global option	Set global option of HDMI 2 audio, which can be AFV, Always On or Always Off	
Set HDMI 2 scene option	Set scene-based option of HDMI 2 audio, which can be Audio On or Audio Off	
Set HDMI 2 volume	Set the gain of HDMI 2 audio, ranging from -40dB to 10dB	
Set STREAM action scope	Apply STREAM audio settings to global or per scene	Select stream by name, including SRT , RTMP , NDI and Phone Camera
Set STREAM global option	Set global option of STREAM audio, which can be AFV, Always On or Always Off	Select stream by name, including SRT , RTMP , NDI and Phone Camera
Set STREAM scene option	Set scene-based option of STREAM audio, which can be Audio On or Audio Off	Select stream by name, including SRT , RTMP , NDI and Phone Camera
Set STREAM volume	Set the gain of STREAM audio, ranging from -40dB to 10dB	Select stream by name, including SRT , RTMP , NDI and Phone Camera
Set VIDEO action scope	Apply VIDEO CLIP audio settings to global or per scene	Select video clip by name
Set VIDEO option	Turn on/off VIDEO CLIP audio	Select video clip by name

Function Name	Description	Remark
Set VIDEO volume	Set the gain of VIDEO CLIP audio, ranging from -40dB to 10dB	Select video clip by name
Set audio input delay	Adjust the input delay of Microphone Jack, HDMI 1, HDMI 2 or USB device, ranging from 0ms to 400ms	
Output microphone sound to monitor device	Enable or disable outputting microphone sound to monitor device	
Output microphone sound to USB-C	Enable or disable outputting microphone sound to external device connected to the USB-C port	
Solo monitor	Only monitor one audio input	Select audio input by name
Scoreboard		
Reset Scoreboard	Reset scoreboard to initial settings	
Adjust team score	Adjust the score of home team or guest team with a value ranging from -100 to 100	
Go to the first period/inning	Go to the first period/inning	Inning is for baseball scoreboard
Go to the last period/inning	Go to the last period/inning	Inning is for baseball scoreboard
Go to the next period/inning	Go to the next period/inning	Inning is for baseball scoreboard
Go to the previous period/inning	Go to the previous period/inning	Inning is for baseball scoreboard
Play game time	Start counting game time	
Pause game time	Pause counting game time	

Function Name	Description	Remark
Play/Pause game time	Start/Pause counting game time	
Adjust game time	Adjust game time, ranging from -100s to 100s	
Adjust Out (Baseball)	Adjust outs, ranging from -2 to 2	For baseball scoreboard
Adjust Ball-Strike (Baseball)	Adjust ball number and strike number, ranging from -3 to 3	For baseball scoreboard
Set on base runners (Baseball)	Set on-base runner indicators for 1st Base, 2nd Base, 3rd Base	For baseball scoreboard
Clear pitch count	Clear balls and strikes to zero	For baseball scoreboard
Timer		
Reset timer	Restore the timer to the preset duration	
Start or resume timer	Start or resume counting	
Pause timer	Pause counting	
Start/Pause timer	Start/Pause counting	
Stopwatch		
Reset stopwatch	Restore the stopwatch to zero	
Start or resume stopwatch	Start or resume counting	
Pause stopwatch	Pause counting	
Start/Pause stopwatch	Start/Pause counting	
PTZ		

Function Name	Description	Remark
Select PTZ device	Select PTZ device	Specify the PTZ device by selecting device name
Call preset	Call preset by number	
Store preset	Store preset by number	
PTZ zoom in	Start to zoom in at a set speed, ranging from 1 to 10	
PTZ zoom out	Start to zoom out at a set speed, ranging from 1 to 10	
PTZ stop zooming	Stop zooming	
PTZ auto focus	Apply autofocus	
PTZ focus far	Focus far at a set speed, ranging from 1 to 10	For NDI PTZ, 1-10 indicates a position.
PTZ focus near	Focus near at a set speed, ranging from 1 to 10	For NDI PTZ, 1-10 indicates a position.
PTZ stop focus	Stop focus	
PTZ home	Move back to the center of the Pan/Tilt	NDI PTZ does not support this function.
PTZ move up	Move upwards	
PTZ move up left	Move upwards and leftwards	
PTZ move left	Move leftwards	
PTZ move down left	Move downwards and leftward	
PTZ move down	Move downwards	

Function Name	Description	Remark
PTZ move down right	Move downwards and rightwards	
PTZ move right	Move rightwards	
PTZ move up right	Move upwards and rightwards	
PTZ stop moving	Stop moving	NDI PTZ does not support this function.
PTZ start recording	Start recording	For OBSBOT Tail Air
PTZ stop recording	Stop recording	For OBSBOT Tail Air
PTZ start/stop recording	Start/stop recording	For OBSBOT Tail Air
Start AI human tracking	Start AI human tracking	For OBSBOT Webcam
Stop AI human tracking	Stop AI human tracking	For OBSBOT Webcam
Start/Stop AI human tracking	Start/Stop AI human tracking	For OBSBOT Webcam
Set AI human tracking mode	Set AI human tracking mode. Options include Normal, Upper Body, Close-up.	For OBSBOT Webcam
Set AI human tracking speed	Set AI human tracking speed. Options include Slow, Fast, Standard.	For OBSBOT Webcam
Set AI human tracking type	Set AI human tracking type. Options include Standard and Motion.	For OBSBOT Tiny 2
Wake up Camera	Wake up the camera	For OBSBOT Webcam
Reset	Reset the webcam to its initial position	For OBSBOT Webcam
Replay		

Function Name	Description	Remark
Replay from start of buffer	Replay from start of buffer	
Replay from N seconds ago	Replay from N seconds ago, ranging from 3s to 60s	
Replay the last event	Replay the last event	
Replay event N	Replay event N	Specify the event by selecting the Event No.
Exit replay	Exit replay	
Pause replay	Pause replay	
Play or resume replay	Play or resume replay	
Play/Pause replay	Play/Pause replay	
Fast forward	Fast forward at a set step size, ranging from 2s to 8s	
Fast backward	Fast backward at a set step size, ranging from 2s to 8s	
Go to a specific position	Go to a specific position on the process bar, ranging from 0s to 60s.	
Rewind to start	Rewind to start	
Add replay event	Add a replay event	
Set the replay speed	Set the replay speed. Options include 0.1x, 0.25x, 0.33x, 0.5x, 0.75x and 1.0x.	
Unmute replay sound	Unmute replay sound	

Function Name	Description	Remark
Mute replay sound	Mute replay sound	
Mute/Unmute replay sound	Mute/Unmute replay sound	
Unmute mic sound	Unmute mic sound	
Mute mic sound	Mute mic sound	
Mute/Unmute mic sound	Mute/Unmute mic sound	
Switch replay camera	Switch replay camera. Options include Camera 1, Camera 2 and Side by Side.	
Others		
Reboot	Reboot the device	
Power off	Power off the device	
Freeze current scene	Freeze current scene	
Unfreeze current scene	Unfreeze current scene	
Freeze/Unfreeze current scene	Freeze/Unfreeze current scene	
Turn on FTB	Turn on FTB	
Turn off FTB	Turn off FTB	
Turn on/off FTB	Turn on/off FTB	
Set USB-C DP output	Set content displayed on the external screen connected to USB-C port	Options include Clean Program, Preview, Multi-view, Duplicate Screen, Loop HDMI 1, Loop HDMI 2


FAQs

General


Notice for connecting the USB-C OUT port to the computer

1. Please connect the device with power cable or battery and power on at first, and then connect to the computer.
2. To power off the device, disconnect the USB-C OUT port from the computer at first, and then press the power button to power off.
3. When the USB-C OUT port is connected to the computer, after creating a file to the internal storage on the device, such as long-pressing the power button to take a screenshot or recording a video, the computer may not recognize the file just created or a pop-up window prompts that the device is not available, you need to reconnect the USB-C OUT port.

How to create a show?

1. Tap  > **Create a show**.
2. Enter your show name, select the show's frame rate and choose the screen orientation.
3. Tap **Create**.

How to create a new scene?



1. Tap  on the main screen.
2. In the **Create New Scene** window, select a source that you want to put into the new scene.
3. Edit the scene in the Scene Editor.
4. Save the changes you have made in the Scene Editor, and then the thumbnail of the new scene will be added to the end of the Scene List.


How to edit a scene?

1. Long press a thumbnail in the scene list on the main screen.
2. Tap **Edit** to open the Scene Editor.
3. You can add more sources, resize the source, add transition effects, etc. For details, please refer to [Edit Scenes](#).

How to configure live stream servers?

Configure the stream server on the Director Mini device:


1. Tap  > Settings > Stream, and select a sever to enter the configuration page.
2. Or tap  on the main screen, tap a server not configured to enter the configuration page.

Only when you have not configured Quick Stream for any server, you can tap  to configure a server; otherwise, it will start streaming.

3. Configure the server according to the introductions on the page. For details, please refer to [Configure Streaming Server](#).

How to start and stop live streaming?


Manual Stream

1. Start streaming:
 - a. Tap  on the main screen.
 - b. Tap **Connect** next to a configured server in the **Live Stream** window.
 - c. (Optional) Repeat the above steps to stream to another server at the same time.

The maximum number of servers you can simultaneously connect to is two. This limit is set to ensure stream performance.



When the NDI streaming is on going, you cannot stream to other server. Vice versa.

If you have not configured any other server, you cannot stream to another server. During the live streaming, the Configure or Log in button of the unconfigured server is unavailable.

2. Stop streaming:
 - a. Tap  on the main screen.
 - b. In the Live Stream window, tap **Disconnect** of a working server to stop streaming to the server.
 - c. (Optional) Repeat the above steps to stop streaming to the other server.

Quick Stream

If you have turned on **Quick Stream** when you [Configure Streaming Server](#), you can start stream automatically.

1. Tap  on the main screen to start streaming.
2. Tap  on the main screen to stop streaming.

How to check whether a sever is enabled with Quick Stream?

Tap  > Settings > Stream, and then if you can see a server is marked with an "Quick" tag, it means this server is enabled with Quick Stream.

How many sources with video signal can I add to one scene/show?

In the same scene

You can add a maximum of three sources, including HDMI, WEBCAM, [SRT](#) stream, [RTMP](#) stream, NDI stream, Phone Camera and video clips, in which:

- Each HDMI source and WEBCAM can only be added once.
- You can only add one video clip.

In the same show

- You can add up to 3 streams, including up to 3 NDI streams.
- You can add up to 3 Phone Cameras.

How do I confirm the video inputs are successfully connected?

Add a video source into a scene. If it displays the image normally, such source is connected successfully. For a Phone Camera, after your connect the phone with device, if the image taken by the phone displays in the scene, it is connected successfully.

Encoding Policy for Streaming, Recording and Replay

1. Recording, streaming and replay can use up to 2 different encoders at the same time.
2. Different functions can share the same encoder, and only one encoder is counted when they are used at the same time.

Supported encoding combinations:

- 2x NDI streaming
- 1x NDI streaming + 1x non-NDI streaming, 1x record, 1x replay (using the same encoder, such as Encode 1)
- 1x non-NDI streaming, 1x record, 1x replay (using Encode 1) + 1x non-NDI streaming, 1x record, 1x replay (using Encode 2)

How to use the keyboard to enter in Chinese?

To enter in Chinese, please connect your device with the Internet, it will download the language package automatically.

Why does the keyboard not pop up on the screen?

If you connect a USB keyboard or Bluetooth keyboard to the device, the internal keyboard will not pop up when you try to enter text. You can use the external keyboard to enter text.

How to import and export files?


Use USB flash drive and SD card

The supported file system types include: FAT32 (The maximum file size is 4 GB), exFAT, and NTFS.

- To import:

When you add a video clip or picture source to a scene, add BGM, or add [GFX](#), you can directly select files from the USB flash driver or SD card. These files are stored into the internal storage automatically. When you delete all the scenes or shows using these files, they will also be deleted from the internal storage.



- To export:

1. Open the album.
2. Tap **Select**, and then select one or more items.
3. Tap  at the bottom, and then select USB or SD Card to export the selected items.

In this way, you can only export recorded video clips and screenshots.

Please insert only one USB flash drive for exporting files.

- An SD card can be used to store recorded video clips and screenshots directly.

- Tap  > **Settings** > **Record** > **Save path**, and select **SD Card First**. (Default)
- Or tap  > **Settings** > **Storage** > **Record** or **Screenshot**, and then select **SD Card First**.

Use computer

- Use a Type-C cable to connect the USB-C OUT port of the device and the computer. (The USB-C port should be [set to MTP mode](#).) The device is recognized as Director Mini, which may differ with the OS. Then you can import and export files with the computer.

Recorded video clips and screenshots are stored in "\\Director Mini\Internal shared storage\Director\Director".

- If an SD card is inserted into the device, the computer can also recognize it and perform read and write operations.

Use Web UI

1. Connect the device to the network.
2. Swipe down from the top of the screen to open the Control Center, and then you can view the connected network and its IP address.
3. Using a computer on the same network, open a browser and access the specified IP address.
4. Or, you can find the Director device in the "File Explorer > Network" on a Windows computer on the same network. Double-click the device to access Web UI.
5. Or, you can enter `directormini.local` on the web browser to access Web UI. The device and computer are in the same LAN.
6. Enter the user name Admin and password Admin to log in.
7. Upload pictures, videos, music on the "Media" page.
8. When you browse files, such as adding BGM, you can find the uploaded files in the "System Media" folder.
9. For the files added to the show on the device, you can view and download them on the "Media" page of the Web UI. For the recording files and screenshots, you can view and download them on the "Record" page of the Web UI.


Why are my recordings split into 4.0 GB clips?

Director Mini applies a default logic to prevent potential damage to the whole video to protect your content by breaking the recording into 4.0 GB clips. You can import video clips to the editing software, then merge them back together without any loss of data. You can also self-define to split recording files by time or by size, which has more options. For details, please refer to [Set Recording Properties](#).

Why can't I log in to my YouTube account?

When you try to log in to your YouTube account, your login may fail with a message indicating that your account is not enabled for live streaming. In this case, you need to go to YouTube to enable live streaming for your account.

1. Log in to [YouTube](#) on your computer.

2. At the upper right corner on the YouTube home page, click  > Go live.
3. If you haven't, follow the prompts to verify your account.
You will be prompted to enter your country and phone number.

After your account is verified, it takes 24 hours to activate your account for live streaming.

Once live streaming is activated, you can then successfully log in to your YouTube account in Director Mini and stream to YouTube.

For other information such as what you can stream to YouTube, you can go to the [YouTube official website](#).

It does not show live comments from Twitch?

The live comments from Twitch are got via SDK. Twitch's SDK does not support binding network card, that is, it does not support setting network priority.

When the device is connected with multiple networks, to use one preferred network for streaming to Twitch while view live comments at the same time, please ensure that all these networks can access the official website of Twitch.

It does not show live comments from Facebook?

To show live comments from Facebook, you need to share your content to Public audience. You can refer to [Choose who can see your post on Facebook](#).

How to use the USB 3.0 ports?

Director Mini provides two USB 3.0 ports, which can accommodate a variety of usage scenarios.

The USB 3.0 ports support video input of webcam, USB microphone or audio playback device, and file transfer with a USB flash drive. The two ports can also connect Magewell USB Capture devices, with which you can connect a wider range of audio and video devices.

Moreover, they also allow various devices to connect, such as a USB modem for network connection, and a USB keyboard for [shortcuts control](#).

Tested USB Webcams that work in Director Mini:

- Logitech StreamCam
- ROCWARE RC08
- DAJIANG ACTION3
- Insta 360 X3

- Hamedal C10

WEBCAM Frame Rate Information

The USB 3.0 ports and USB-C port support connecting WEBCAM. The supported frame rate to capture is shown as follows.

WEBCAM Connection	Frame Rate
One WEBCAM to one USB 3.0 port	Up to 60 fps
One WEBCAM to the USB-C port	Up to 60 fps
Two WEBCAMs to two USB 3.0 ports	Up to 50 fps + 30 fps
One WEBCAM to one USB 3.0 port, one WEBCAM to the USB-C port	Up to 60 fps + 60 fps

What can the USB-C OUT port be used for?

The USB-C OUT port is a USB 3.0 Type-C port, and provides multiple functions for free usage.

- Connect to computer to transfer file

You can go to  > **Settings** > **USB Type-C**, to [set the USB-C port to MTP mode](#) to transfer files between Director Mini and the computer.

- Connect to computer to output audio and video

You can go to  > **Settings** > **USB Type-C**, to [set the USB-C port to UVC + UAC mode](#) to output audio and video to streaming software, such as Zoom and Skype.

- Connect to a [USB Hub](#) for more usage

You can use a [USB Hub](#) to connect WEBCAM for audio and video input, or connect a USB flash drive for file transfer, or a USB modem for network connection, or a USB keyboard for [shortcuts control](#), etc.

- Output audio and video to an external screen

It also serves a display port to connect to an external screen, such as a monitor and HDTV, supporting 1920x1080@60hz or 1920x1080@50hz, which changes along with the show's frame rate. You can use a Type-C to HDMI / VGA / DP adapter to connect the USB-C OUT port to the external screen, and select content to display on the external screen according to the prompt. It supports displaying clear program, preview, multi-view, duplicating the device screen, looping HDMI 1 or HDMI 2.

Besides, when Director Mini is connected to an external touchscreen and set to "Duplicate Screen", you can use the external touchscreen to control the device, so as to enlarge your canvas for better scene editing, annotation, etc.

 Notice for using the external touchscreen to control Director Mini:

- The external touchscreen must support HID multi-touch function (no need of driver).
- Connect the touchscreen and Director Mini with a Type-C to Type-C cable. If you use a Type-C adapter, please connect the Touch Function port of the touchscreen to the device. For details, please refer to your touchscreen's user manual.
- Select Duplicate Screen as the displayed content.
- The external touchscreen should keep the full screen mode and the same orientation as the Director Mini device.

Mapping between the show's frame rate and each output frame rate

According to different frame rate of the show, the output frame rate or frame rate options related to recording, streaming, USB-C external screen and more will also be different, and the mapping relationship between them is shown in the following table.

Show	Frame Rate (fps)			
	USB-C DP-Out	Record	Streaming	Phone Camera
60	60	60, 30, 15	60, 30, 15	60, 30
59.94	60	59.94, 29.97	59.94, 29.97	59.94, 29.97
50	50	50, 25	50, 25	50, 25
30	60	30, 15	30, 15	30
29.97	60	29.97	29.97	29.97
25	50	25	25	25
24	50	24	24	24
23.98	50	23.98	23.98	23.98

How to optimize encoding settings

Encoding parameters directly affects your final video output. Setting encoding parameters can be a tricky job, always a balancing act, a tradeoff between quality and bandwidth.

You will want to optimize each of the encoding parameters to deliver the best possible video quality.

Resolution

Selecting a resolution is relatively easy. 1280x720 is considered HD resolution and 1920x1080 Full HD. 1920x1080 looks sharper but also requires more processing power and bandwidth.

Frame rates

A wide range of frame rates are available for different use cases. For example, 25fps is usually used for PAL television systems, 29.97fps applies to NTSC television systems, while 24fps is mostly used when shooting and displaying movies.

Generally a higher frame rate provides smoother motion and crisper details. Videos with a lot of motions, such as sports events, will often need a higher frame rate. On the flipside, a high frame rate can put a lot of pressure on your device and network.

A lower frame rate can result in choppy or broken movement, but it puts less stress on your device and network, so it can also be a good choice in some cases, such as when no fast moving objects are present.

High-definition video generally employs 30fps/60fps. To start out, 30fps is a safe choice to get a nice, clean, and stable video.

Bitrate

A higher bitrate can carry more data and often means better video quality, but you must have the bandwidth to accommodate it. Insufficient bandwidth in this case can result in dropped video frames, which can make the video choppy. Moreover, when the bitrate is already high enough for your video, increasing it further will not make an obvious difference for your video quality.

To set the bitrate properly, you have to factor in your network upload speed, device performance, resolution, and frame rate.

If your upload speed allows, you might want to set a bitrate that accommodates both high resolution and high frame rate to make your video look as sharp and smooth as possible. But if you have a limited upload speed, you may have to balance the resolution and frame rate. You need to make your choice based on your specific use case. For example, when your video features less motion but more detail, you might want a resolution of 1920x1080 and a frame rate of 30fps under limited bandwidth. When fast motions come first, streaming at 1280x720 and 60fps makes sense.

Different platforms also have their own recommendations for bitrates. You can click [Facebook](#), [Twitch](#), or [YouTube](#) to view the corresponding official guidelines.

Key frame interval

A longer key frame interval means there will be less complete pictures, which can increase compression efficiency and reduce bandwidth consumption.

However, it can also result in longer time for switchover between different bit rates at the player side. For live streaming, 2 seconds is generally recommended for the right balance of quality and performance. For action-packed streams, you may want to try the interval of 1 second.

Audio

Audio format includes sampling rate, codec format and bitrate. The suggested streaming format is 48khz, [aac](#), 128kbps.

Profile

Profiles are a "family" of encoding techniques targeted for specific application scenarios. The three most commonly applied H.264 profiles are:

- **Baseline:** it includes I- and P-frames. This profile is designed for progressive video and supports CAVLC entropy coding. It is used primarily in low-cost applications or those needing extra fault tolerance, for instant messaging scenarios such as video call, and mobile video.
- **Main:** it includes I-, P-, and B- frames. This profile is for progressive and interlaced videos, and supports CAVLC and CABAC entropy coding. It is used in videos for mainstream consumer electronic devices, such as MP4 with relatively low decoding rate, portable video player, PSP and iPod.
- **High:** it adds 8x8 internal prediction, custom quantification, lossless video encoding and more YUV formats (e.g., 4:4:4) on the basis of main profile. High profile is used for broadcast and video disc storage (Blu-ray movies), and HDTV applications.

Bitrate mode

Among the different bitrate modes, **CBR** is the most predictable but generally yields videos of less satisfying quality. **VBR** involves more complex processing and can be slower, but it usually produces higher quality streams at similar bitrates.

Generally, it is recommended to use **VBR** for encoding. It gives you the best balance between quality and bandwidth consumption.

Audio

What audio inputs/outputs does Director Mini support?

Director Mini supports the following audio inputs and outputs:

Audio Input

- Mic/line in: 1x 3.5mm jack, 2-channel, 48 KHz, 16-bit
- Audio input from HDMI 1 and HDMI 2 ports: 2-channel, 48 KHz, 16-bit
- Audio input from USB port: 2-channel, 48 KHz, 16-bit
- Audio input from Bluetooth device: 2-channel, 48 KHz, 16-bit
- Audio input from Phone Camera's microphone
- Audio from [SRT](#) streams
- Audio from [RTMP](#) streams
- Audio from NDI streams
- Audio embedded in video files
- Background music (BGM): MP3, M4A and WAV files

Audio Output

- Streaming and recording output: 2-channel, 48 KHz, 16 bit, [aac](#) format, 64/96/128kbps
- USB-C OUT port: 2-channel, 48 KHz, 16 bit
- Monitor output, selecting one of the follows as the monitor
 - Bluetooth device: 2-channel, 48 KHz, 16 bit
 - Headphone output: 1x 3.5mm jack, 2-channel, 48 KHz, 16 bit
 - USB port: 2-channel, 48 KHz, 16-bit/24-bit/32-bit



How do I adjust volume?

You can adjust audio volume when editing a scene, previewing the show and even during streaming and recording.

Tap  on the main screen or in the Scene Editor, to open the audio mixer. For details, see [Volume Control](#).






Why is there no audio from the HDMI input?

Check whether Director Mini is selected as the audio output device on the source computer connected to the HDMI port. Only when Director Mini is selected will the computer output audio to Director Mini. The configuration varies depending on the OS.

For example, on Windows 10, click  >  > System > Sound. In the Output section, choose **Director Mini (*****)** from the drop-down list box of **Choose your output device**, such as **Director Mini (Intel(R) Display Audio)**.

Why can I not hear the audio from my phone?

Please check by the following steps.

1. Tap  on the main screen or in the Scene Editor, and then check whether the audio of Phone Camera is set to . If yes, set it to **AFV** or .
2. In the Scene Editor, select the Phone Camera source. Tap **Property** on the bottom bar, and then check whether the **Microphone** is toggled on. If not, toggle it on.
3. Tap  on the Phone Camera screen of your phone, and it will turn to , which means the microphone is on.

Settings

Which AP band should I choose for hotspot?

1. The advantage of 2.4GHz is that it has a wider coverage area and stronger capability to penetrate solid objects. The main advantage of 5.0GHz is that the transmission rate is faster, which is 2~3 times that of the traditional 2.4GHz. And its anti-interference ability is stronger, which can avoid the interference of various electromagnetic waves in the daily environment.
2. Since most wireless devices currently use the 2.4GHz frequency band, they are often interfered in the daily environment. The signal will not be as good as 5.0GHz, and the network speed will also be affected. At present, most devices already support 5.0GHz. It is recommended to turn on 5.0GHz, so that it is not easy to be interfered, but at the same time, the power consumption of the device will be accelerated.
3. However, if your devices are separated by a distance, it is recommended to choose 2.4GHz, so that you can receive a better signal even across obstacles.

Note: When the Wi-Fi connected to the Director Mini device is 5.0GHz, the AP band can only be selected as 2.4GHz; when the Wi-Fi is 2.4GHz, the AP band can only be selected as 5.0GHz.

What to do when firmware update fails

Possible causes:

1. The device is powered off or rebooted during the update.
2. The network is disconnected when the device is downloading the update file for auto update.
3. The device is out of storage space when downloading the update file for auto update.
4. The update file for manual update is not the correct file.

Troubleshooting procedure:

1. Check whether Director Mini is powered off. Connect Director Mini with a power supply or install a fully charged battery.
2. For auto update, check whether the network connection is normal.
3. For auto update, check whether the storage space of the device is sufficient, and delete some files if necessary.
4. Check whether you have downloaded the right update file of Director Mini. Go to (<https://www.magewell.com/downloads>) to download the update file of Director Mini.
5. Update the firmware again.

DO NOT power off or reboot your device during the update.

If your issue is not solved, please submit your questions in the online Ticket System: tickets.magewell.com, or contact the Magewell Technical Support Team at support@magewell.net.

Support

If you have problems or questions during using Director Mini, you can find support and help through the following ways.


View Help

Tap  > **Help**, to get help information, which will tell you how to use Director Mini and give answers to some frequently asked questions.

Feedback

You can use the feedback feature to ask technical questions, make suggestions and complaints.



Submit New Feedback

1. Tap  > **Feedback** > **Submit new feedback**.
2. Select an Inquiry type: Technical question for product, Suggestion for a new feature, or Complaint.
3. Enter your personal information, such as First name (required), Last name, Email (required), Phone number, and Location.
4. Describe your problem with as many details as possible.
5. Add an attachment file.


A log file can help the support team analyze your problem. For how to get the log file, please refer to [Generate Log File](#).

6. Tick to agree privacy statements.
7. Enter the verification code.
8. Tap **Submit**, and then you will see a message saying Question Submitted Successfully.

Generate Log File

1. Tap  > **Feedback** > **Generate log file**.
2. Tap **Start**.
3. Agree the privacy policy.
4. Tap **Go to home screen** to reproduce the issue you've encountered.
5. After you have finished reproducing the issue, tap  > **Feedback** to go back to the *Generate log file* page.
6. Tap **Stop**, and then a .zip file is generated in the internal storage.
7. (Optional) Tap **Export** to export it to the SD card or USB flash drive for more use.

Check Submitted Feedback

1. Tap  > **Feedback** > **Submitted feedback**.
2. Enter your Email and tap **Track**.
3. Then you can see the feedback list, tap one feedback to check its status.

Get the Latest Information

If you have any problems using Magewell products or need more technical information, please visit the [official website](#) for product introduction, user manual, and more.

Technical Support

- Go to the [Knowledge Base](#) to find answers to your problem. If you cannot find an answer, click **Contact Us** at the bottom to contact the support team.
- Submit your questions in the online Ticket System: tickets.magewell.com, or contact the Magewell Technical Support Team at support@magewell.net.

Notice

Copyright ©2024 [Nanjing Magewell Electronics Co., Ltd.](#)

All rights reserved. No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law.

Trademarks

HDMI, the HDMI logo and High-Definition Multimedia interface are trademarks or registered trademarks of HDMI Licensing LLC. Windows is trademark or registered trademark of Microsoft Corporation. OS X and macOS are trademarks or registered trademarks of Apple Inc. NDI is trademark or registered trademark of NewTek Inc. Other trademarks and company names mentioned are the properties of their respective owners.

About this Document

- This document is for reference only. Please refer to the actual product for more details.
- The user shall undertake any losses resulting from violation of guidance in the document.
- In case that PDF document cannot be opened, please upgrade the reading tool to the latest version or use other mainstream reading tools.
- This company reserves rights to revise any information in the document anytime; and the revised contents will be added to the new version without prior announcement. Some functions of the products may be slightly different before and after revision.
- The document may include technically inaccurate contents, inconsistencies with product functions and operations, or misprint. Final explanations of the company shall prevail.
- The only warranties for Magewell products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Magewell shall not be liable for technical or editorial errors or omissions contained herein.

Glossary and Abbreviations

AAC

AAC (Advanced Audio Coding) refers to digital audio coding standard that represent audio files based on lossy audio compression. It was launched as successor of MP3 file format keeping in view that the lateral faced issues for the implementation of new ideas in the encoding process based on the development of methods for data compression. AAC achieves better sound quality as compared to MP3 at the same bit rate.

AES

Advanced Encryption Standard (AES) is a specification for the encryption of electronic data.

CBR

Constant bit rate. It means that your stream will be encoded using the selected bit rate over all the time.

FTB

Fade to black. FTB allows your show to slowly disappear into a black, usually indicating the end of a scene or show.

GFX

Graphic overlays. GFX are text and graphics that are displayed in a stream over the actual content (such as game or video) during a live stream.

RTMP

RTMP stands for "Real-Time Messaging Protocol". It is an efficient way to transmit large chunks of audio, video, and data from a server to the Internet via an encoder. Most live video streaming relies on RTMP to deliver smooth, real-time playback.

SRT

SRT stands for "Secure Reliable Transport". It is an open source video transport protocol that utilizes the UDP transport protocol. It supports packet recovery while maintaining low latency. SRT also supports encryption using AES.

SSID

SSID stands for "Service Set Identifier". Under the IEEE 802.11 wireless networking standard, a "service set" refers to a collection of wireless networking devices with the same parameters. So, the SSID is the identifier (name) that tells you which service set (or network) to join.

USB Hub

USB hub refers to a device that expands one Universal Serial Bus (USB) port into several and enables those ports can be used at the same time. With this device, you don't have to worry about the port is not enough anymore.

VBR

Variable bit rate. In this mode, the encoder dynamically increases or decreases the bit rate based on the image bitrate needs. VBR is preferred to CBR when you expect better image quality.